


## 8 RS232/422/485 Serial Port Module w/ TTL CAN controller (RoHS)

# COM-1274

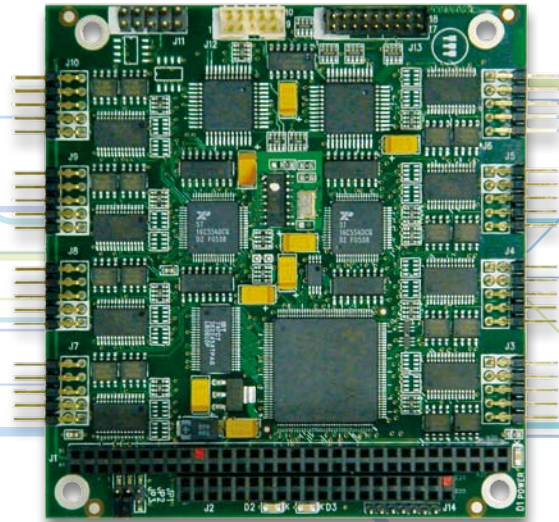

### FEATURES

**Serial** – 8 asynchronous RS232/422/485 serial ports (software configurable)

**CAN** – • Up to 2 CAN ports  
• Intel® 82C527 chipset

**Dimensions** – Compliant with the PC/104 standard

**BUS** – ISA PC/104 compliant

**Supported Operating Systems** – WinCE®, WinXPE® and Linux®

**Power Supply** – Single +5V dc

The Eurotech COM-1274 is a fully RoHS compliant PC/104 module specifically developed for performing advanced communication tasks in embedded systems.

It features 8 independent asynchronous serial channels and up to two Control Area Network (CAN) ports. For flexibility and high-speed transmission, the board's 16C550C serial ports operate at up to 115 Kbaud and are configured in pairs via software as RS-232, RS-422 or RS-485.

The CAN interface supports the "CAN extended frame" message format (CAN 2.0B protocol).

In order to meet the demands of high reliability in industrial environment, an optically isolated RS485 physical CAN interface option is available.



## Specifications

|         |  |
|---------|--|
| SERIAL: | <ul style="list-style-type: none"><li>• 8 asynchronous RS232/422/485 serial ports (software configurable)</li><li>• Maximum programmable speed: 115 Kbaud</li><li>• I/O controller: 16C550C</li><li>• Connector type: 5x2 pin DIL 2.54mm pin-strip</li><li>• IRQ : 2, 3, 4, 5, 7, 10, 11, 12, 14, 15</li></ul> |
| CAN:    | <ul style="list-style-type: none"><li>• Up to two CAN ports</li><li>• CAN Controller: Intel 82C527</li><li>• Onboard Interface: TTL</li><li>• Connector type: 5x2 pin DIL 2.54mm pin-strip</li><li>• Physical Interface: External RS485 transceiver</li></ul>  |

## Physical Characteristics

|                        |   |
|------------------------|---|
| DIMENSIONS:            | 90 x 96 mm (3.6" x 3.8")                                |
| HEIGHT:                | 15 mm (0.6")  |
| POWER CONSUMPTION:     | +5V, 100 mA typical                                     |
| OPERATING TEMPERATURE: | 0 ~ 70 °C (standard)<br>-40 ~ +85 °C (extended)         |
| HUMIDITY:              | Up to 95% non-condensing                                |
| ROHS:                  | RoHS (2002/95/CE) Compliant<br>Replacement for COM-1270 |

## Accessories

External transceiver RS-485 for physical CAN interface

## Options

Extended temperature version

Conformal coating

Note: The information in this document is subject to change without notice and should not be construed as a commitment by EUROTECH. While reasonable precautions have been taken, EUROTECH assumes no responsibility for any error that may appear in this document. All trademarks or registered trademarks are the properties of their respective companies.