

## CPDUR5V0CSP-HF RoHS Device Halogen Free



### Features

- Bi-directional ESD protection.
- IEC61000-4-2 Level 4 ESD protection.
- Working Voltage: 5V
- Low capacitance ESD protection.
- Typical capacitance: 0.4pF

### Mechanical data

- Case: 0603/SOD-523F small outline plastic package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Mounting position: Any.
- High temperature soldering guaranteed: 260°C/10 second.
- Weight: 0.003 grams(approx.).

### Circuit Diagram



### Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power ( tp = 8/20μs waveform)	PPP	60	W
ESD per IEC 61000-4-2(Air) ESD per IEC 61000-4-2(Contact)	V <sub>ESD</sub>	±15 ±8	kV
Operating temperature rang	T <sub>J</sub>	-55 to +150	°C
Storage temperature rang	T <sub>STG</sub>	-55 to +150	°C

### Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse stand-Off voltage		V <sub>RWM</sub>	-	-	5	V
Reverse leakage current	V <sub>R</sub> = 5 V	I <sub>R</sub>	-	-	100	nA
Reverse breakdown voltage	I <sub>R</sub> = 1 mA	V <sub>(BR)</sub>	6	-	10	V
Clamping voltage	I <sub>PP</sub> = 1 A	V <sub>c</sub>	-	13	15	V
	I <sub>PP</sub> = 3A	V <sub>c</sub>	-	18	20	V
Junction capacitance	V <sub>R</sub> = 0V , F=1MHz	C <sub>J</sub>	-	0.4	0.6	pF

## RATING AND CHARACTERISTIC CURVES (CPDUR5V0CSP-HF)

Fig.1 - 8/20us Peak Pulse Current Wave  
Form Acc. IEC 61000-4-5

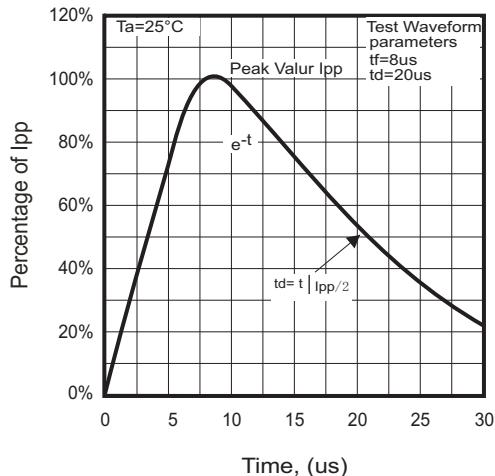


Fig.2 - Typical Capacitance Between  
Terminals Characteristics

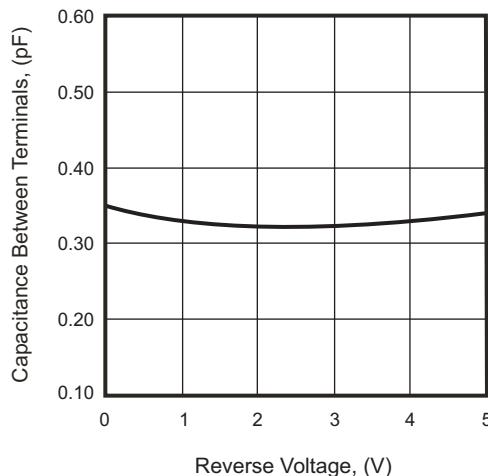


Fig.3 - Clamping Voltage Vs.  
Peak Pulse Current



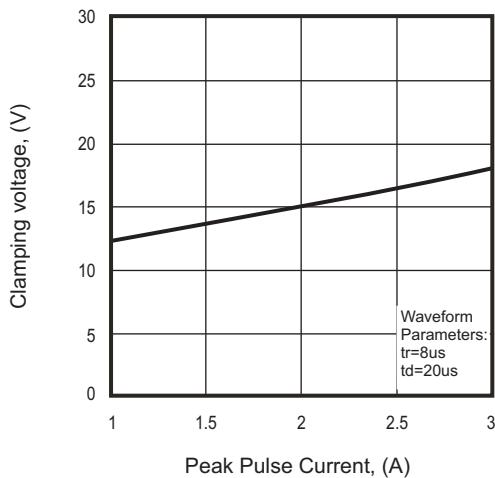


Fig.4 - Power Rating Derating Curve

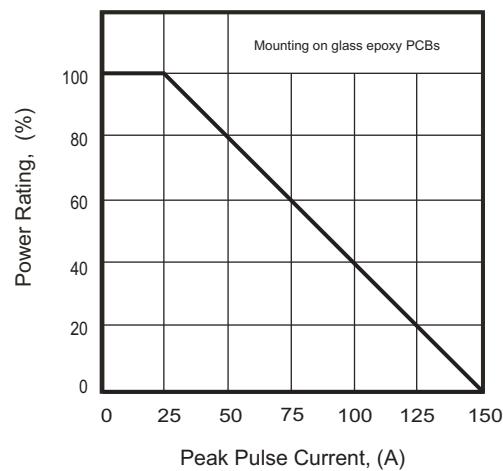

## Reel Taping Specification

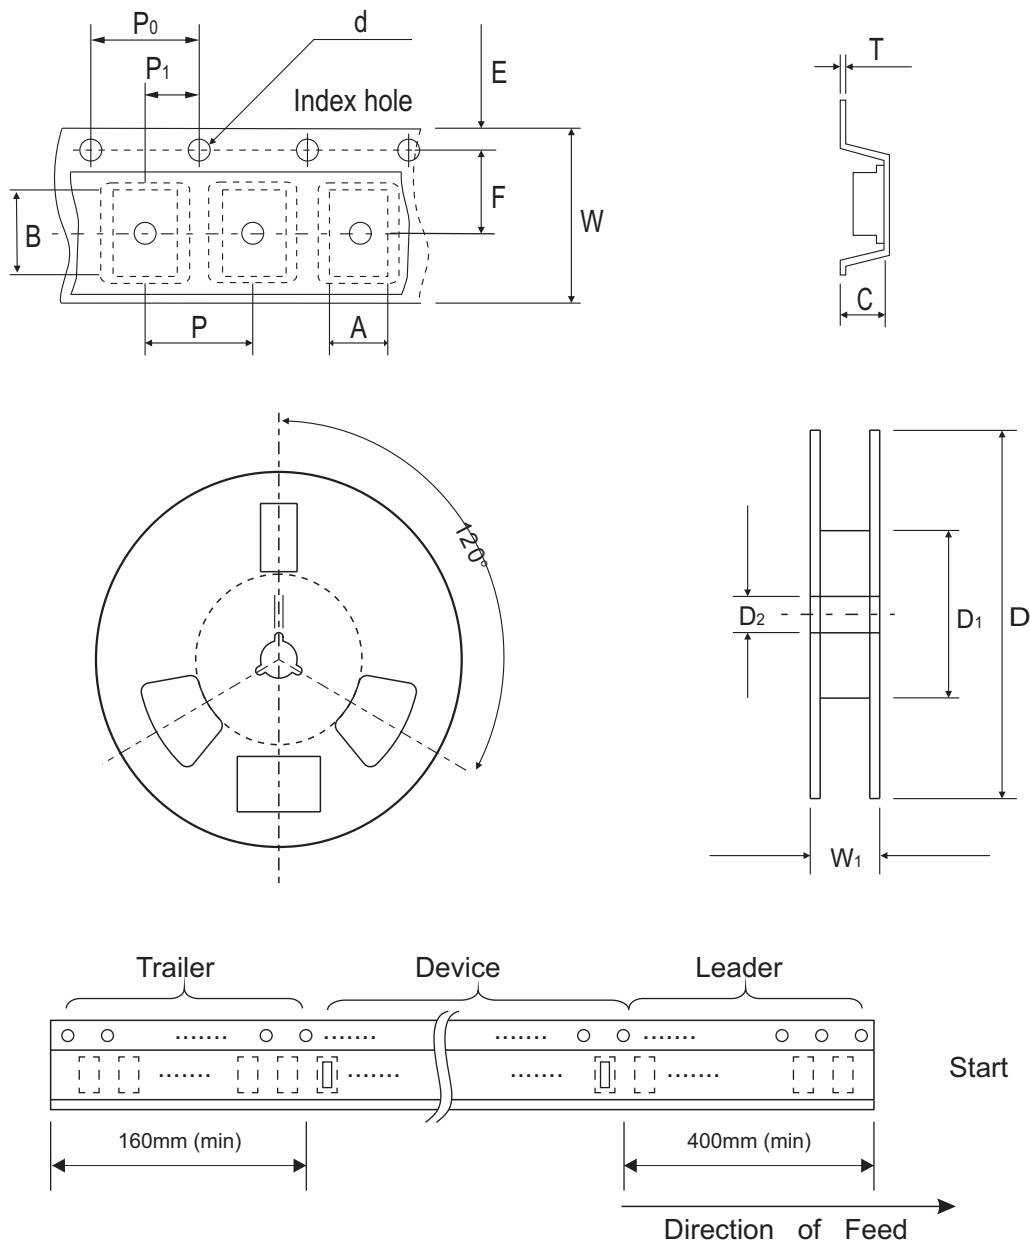

0603 (SOD-523)	SYMBOL	A	B	C	d	D	D <sub>1</sub>	D <sub>2</sub>
	(mm)	1.16 ± 0.10	1.90 ± 0.10	0.95 ± 0.10	1.50 + 0.10 - 0	178.00 ± 1.00	60.0 ± 0.50	13.50 ± 0.20
	(inch)	0.046 ± 0.004	0.075 ± 0.004	0.037 ± 0.004	0.059 + 0.004 - 0	7.008 ± 0.039	2.362 ± 0.020	0.531 ± 0.008

0603 (SOD-523)	SYMBOL	E	F	P	P <sub>0</sub>	P <sub>1</sub>	T	W	W <sub>1</sub>
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	0.22 + 0.10 - 0.05	8.00 ± 0.20	12.00 + 0.50 - 0
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.009 + 0.004 - 0.002	0.315 ± 0.008	0.472 + 0.020 - 0