

5

4

3

2

1

DRAWING NO.

CPMC782-CUST

REVISIONS

01	OFFICAL RELEASE				
	03-05-09	Z	B	T	
02	RELEASE FOR SUPPLIER ALTER				
	07-27-11	Y	Y	M	
03	MATERIAL: BODY WAS BRASS DIMENSIONS: $\Phi 14.3 \pm 0.3$ WAS $\Phi 14.5$ 7.2 ± 0.2 WAS 7.60 ; 9.6 ± 0.3 WAS 9.70 $\Phi 0.86 \pm 0.05$ WAS $\Phi 0.96$ ADD CABLE STRIP DIMENSIONS				
	12-31-11	Y	Y	M	ECO-11-0270
04	MATERIAL: BODY WAS ZINC INSULATOR WAS TEFLON				
	02-10-12	Y	Y	M	ECO-12-0014

Description: Plug Assembly, Straight Crimp Type BNC 75 Ohm, RG59, 62

Part No: CPMC782

Application: For Cable BELDEN 1505A, RG59, 62

Crimp Tool: 24-9959P

Impedance: 75 Ohms

Fequency Range: 0-2 GHz

Material: Body Brass Nickel Plated

Contact Brass Gold Plated



Insulator POM

Crimp Sleeve Brass Nickel Plated

Coupling Nut Zinc Nickel Plated

RoHS Compliance: Yes

Technical Detail: Refer to Emerson Document P/N 27-0000

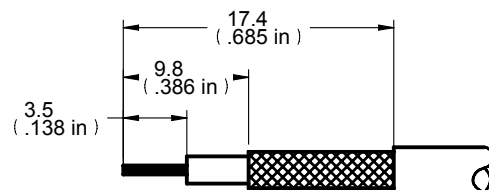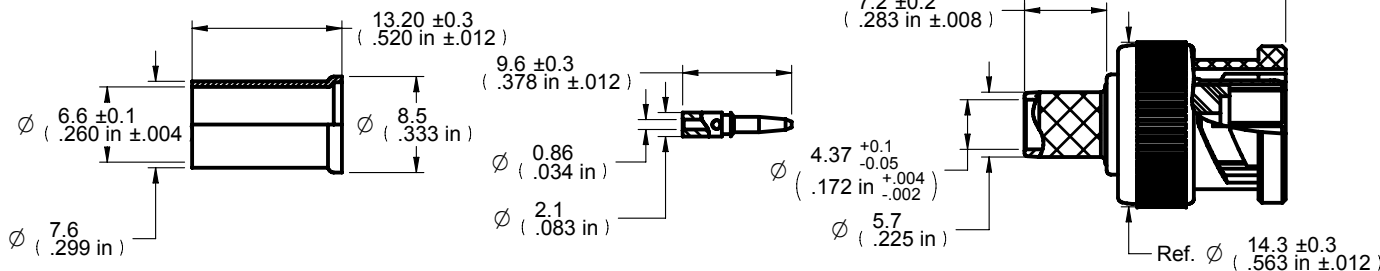

CABLE STRIP DIMENSIONS

DIM OUTLINE

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	YUGE HU	07-27-11
X	± 0.5	CHECKED BY	DATE
X.X	± 0.2	YUGE HU	07-27-11
X.XX	± 0.1	APPROVED BY	DATE
ANGLES	± 0.5°	LIN MA	07-27-11
		U/M	mm

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

		Connectivity Solutions	
		TITLE	
SHEET		DRAWING NO.	
1 OF 1		CPMC782-CUST	
		SIZE	
		A	

SHEET		DRAWING NO.		SIZE	
1 OF 1		CPMC782-CUST		A	

5

4

3

2

1