

SERIES: CSXX12U | **DESCRIPTION:** CURRENT SENSOR

FEATURES

- open loop
- unipolar
- detects current direction
- single channel



| MODEL | rated current (If) | linearity range ¹ (Im) |
|---------|---------------------|-----------------------------------|
| | [A _{RMS}] | [A _{PEAK}] |
| CS0312U | +3 | +6 |
| CS0512U | +5 | +10 |
| CS1012U | +10 | +20 |
| CS1512U | +15 | +30 |
| CS2012U | +20 | +40 |

Notes: 1. Im is the maximum peak current for which the output voltage specifications are guaranteed, however the If RMS rating must not be exceeded.
 2. All specifications measured at 25°C, RI=10 kΩ, unless otherwise noted.
 3. It is recommended to add a 1 μF capacitor connected between the common terminal 4 and the +12 V terminal 1 to avoid noise problems.

SPECIFICATIONS

| parameter | conditions/description | min | typ | max | units |
|---|---|------|-------|-------|-------|
| supply voltage (Vcc) | | 11.4 | 12.0 | 12.6 | V |
| max current consumption (Ic) | | | | 25 | mA |
| output voltage (Vo) | at +If | 4.96 | 5.00 | 5.04 | V |
| zero current offset voltage (Vr) | after demagnetization | 0.97 | 1.0 | 1.03 | V |
| output voltage linearity ⁴ (ΔKo) | | | | ±0.5 | % |
| response (tr) | at di/dt = If/μs | | 3 | | μs |
| output voltage temperature characteristics | | | | ±0.1 | %/°C |
| zero current offset voltage characteristics | | | | ±1.5 | mV/°C |
| hysteresis (Vh) | at +If to zero current | | | 15 | mV |
| primary over current | for maximum 50 ms, no damage | | | 10*If | A |
| withstand voltage | between coil and each terminal for 1 minute | | 2,000 | | Vac |
| insulation resistance | between coil and each terminal at 500 Vdc | | 500 | | MΩ |
| operating temperature | | -10 | | 75 | °C |
| storage temperature | | -30 | | 90 | °C |
| safety approvals | UL 508 | | | | |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |

Notes: 4. Deducting the value of hysteresis and offset voltage, calculated by (V/Vo)/(IfxI-1)x100%.

SOLDERABILITY

| parameter | conditions/description | min | typ | max | units |
|----------------|------------------------|-----|-----|-----|-------|
| hand soldering | for maximum 3 seconds | | 280 | | °C |

MECHANICAL


| parameter | conditions/description | min | typ | max | units |
|---------------|----------------------------------|-----|-----|-----|-------|
| dimensions | 15 x 15 x 20 | | | | mm |
| case material | PBT | | | | |
| terminals | phosphor bronze with tin plating | | | | |
| weight | | | 8 | | g |

MECHANICAL DRAWING

units: mm
tolerance: ±0.5 mm

| PIN CONNECTIONS | |
|-----------------|------------|
| PIN | FUNCTION |
| 1 | +12 V |
| 2 | NC |
| 3 | Output [V] |
| 4 | 0 V |
| 5 | +Input [A] |
| 6 | -Input [A] |

| MODEL NO. | ØA [mm] | ØB [mm] |
|-----------|---------|---------|
| CS0312U | 0.6 | 1.2 |
| CS0512U | 0.9 | 1.5 |
| CS1012U | 1.1 | 1.7 |
| CS1512U | 1.4 | 2.0 |
| CS2012U | 1.7 | 2.3 |

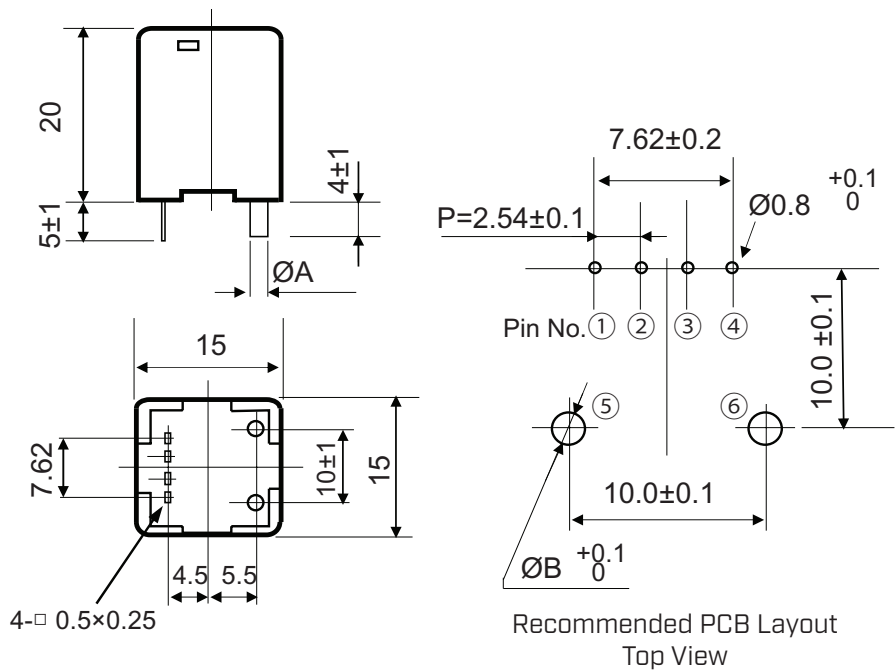


DERATING CURVE




PERFORMANCE CURVES


Output Voltage vs. Input Current

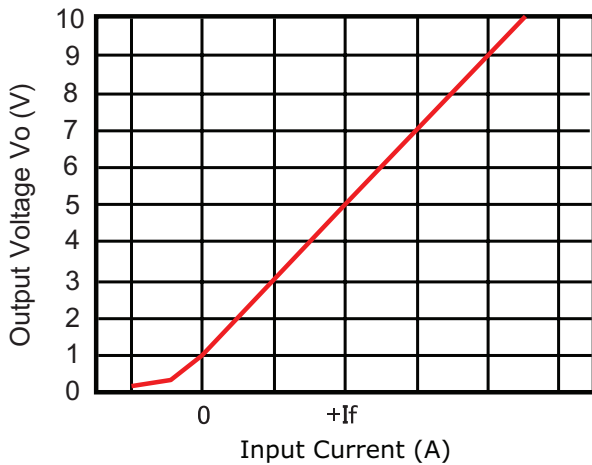

Input Current Frequency vs. Output Attenuation

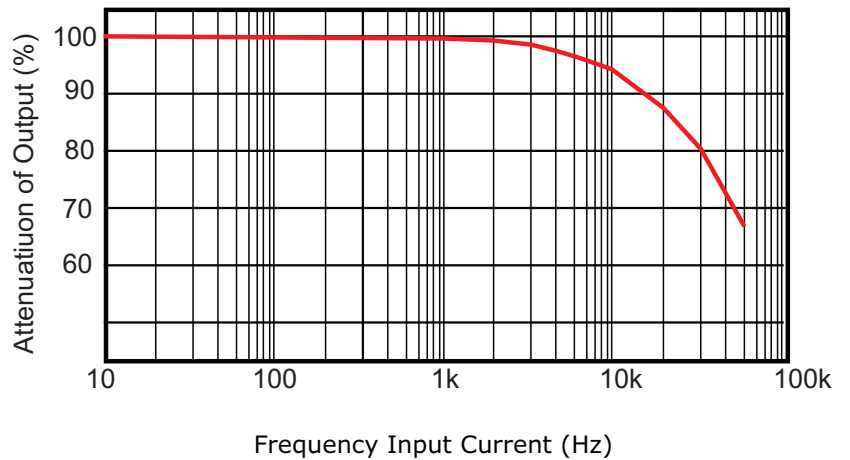

Output Voltage vs. Ambient Temperature
[at +If]

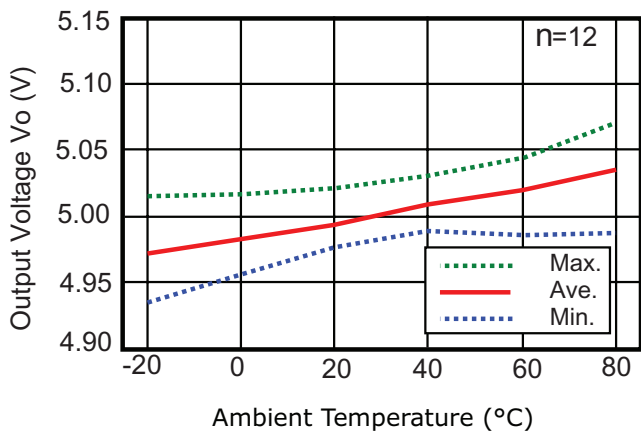

Offset Voltage vs. Ambient Temperature
[at Zero Current]

