PRODUCT DATASHEET CS14144_STRADA-IP-2X6-ME

STRADA-IP-2X6-ME

Beam with excellent longitudinal luminance uniformity fulfilling EN13201 M-class requirements where road width is equal to or less than the pole height

SPECIFICATION:

Dimensions 71.4 x 173.0 mm

Height 8.4 mm

Fastening screw

Ingress protection classes IP67

ROHS compliant yes 1



MATERIALS:

ComponentTypeMaterialColourFinishSTRADA-IP-2X6-MEMulti-lensPMMAclear2X6-SEAL25SealSiliconewhite

ORDERING INFORMATION:


 Component
 Qty in box
 MOQ
 MPQ
 Box weight (kg)

 CS14144_STRADA-IP-2X6-ME
 Multi-lens
 120
 40
 40
 7.3

 » Box size: 476 x 273 x 247 mm
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3
 7.3



PRODUCT DATASHEET CS14144_STRADA-IP-2X6-ME

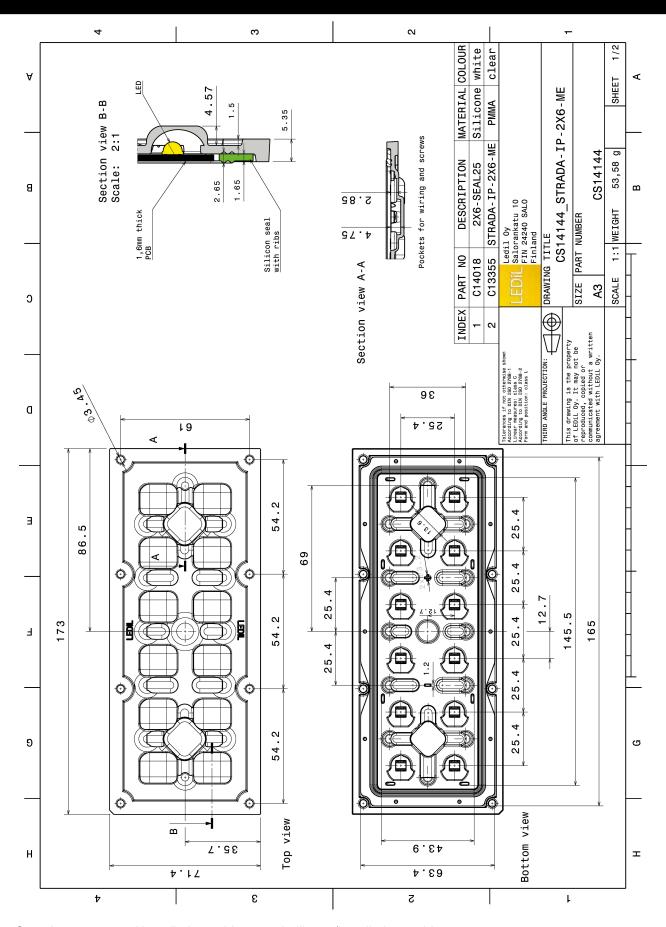


See also our general installation guide: www.ledil.com/installation_guide





LED Bridgelux SMD 5050


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



COMET

LED QUICK FLUX 2x6 LED XG xxx G7+


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CONET


LED QUICK FLUX 2x6 LED XT xxx G5

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE -

LED XP-G2
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:








LED XP-L HD

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric 94 %

Efficiency Peak intensity 0.6 cd/lm

LEDs/each optic

Light colour White Required components:



CREE \$

LED XP-L2


FWHM / FWTM Asymmetric

Efficiency 94 %

Peak intensity 0.6 cd/lm

LEDs/each optic 1 White Light colour

Required components:



CREE +

LED XT-E


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric

Efficiency 93 % Peak intensity 0.8 cd/lm

LEDs/each optic

Light colour White

Required components:



CREE \$


XT-E HE

FWHM / FWTM Asymmetric


94 % Efficiency Peak intensity 0.8 cd/lm

LEDs/each optic

White Light colour





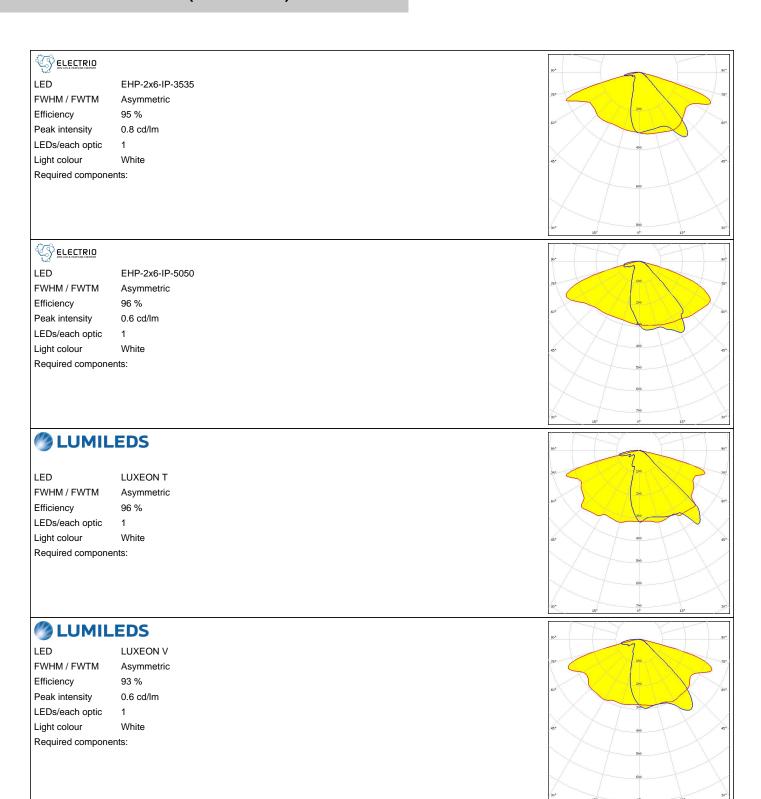






LED LUXEON XR-TX (L2T0-xxxx012M0000)


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



Your solutions

LED RecLED 146x45mm 2900lm 730 2x6 IP G1


FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NVSW219D
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1

Light colour White Required components:




WNICHIA

LED NVSW219F FWHM / FWTM Asymmetric Efficiency 94 %

Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour White



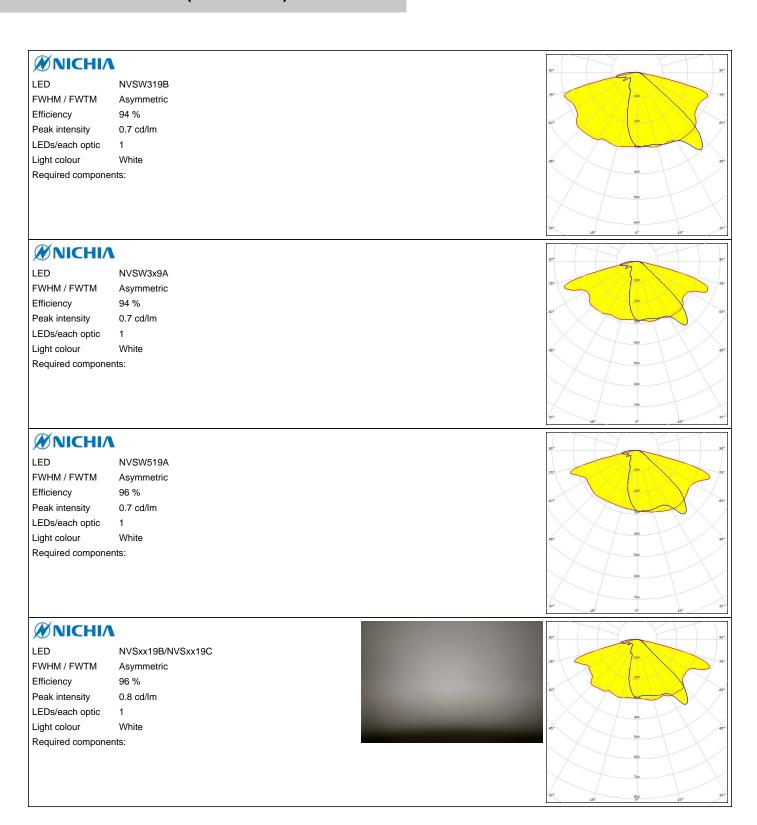




OSRAM

LED OSLON Square CSSRM2/CSSRM3


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



OSRAM

. __


LED OSLON Square PC
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x6 DP G4


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x6 DP G5

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:






SAMSUNG

LED HiLOM RH12 (LH351C)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SCIOLUX

LED ROY-S26XPL2 (XP-L2)

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White


Required components:



SCIOLUX

LED XLE-S22C4XTEHE (XT-E HE)


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:




SCIOLUX

LED XLE-S26XHP35 (XHP35 HD)


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:





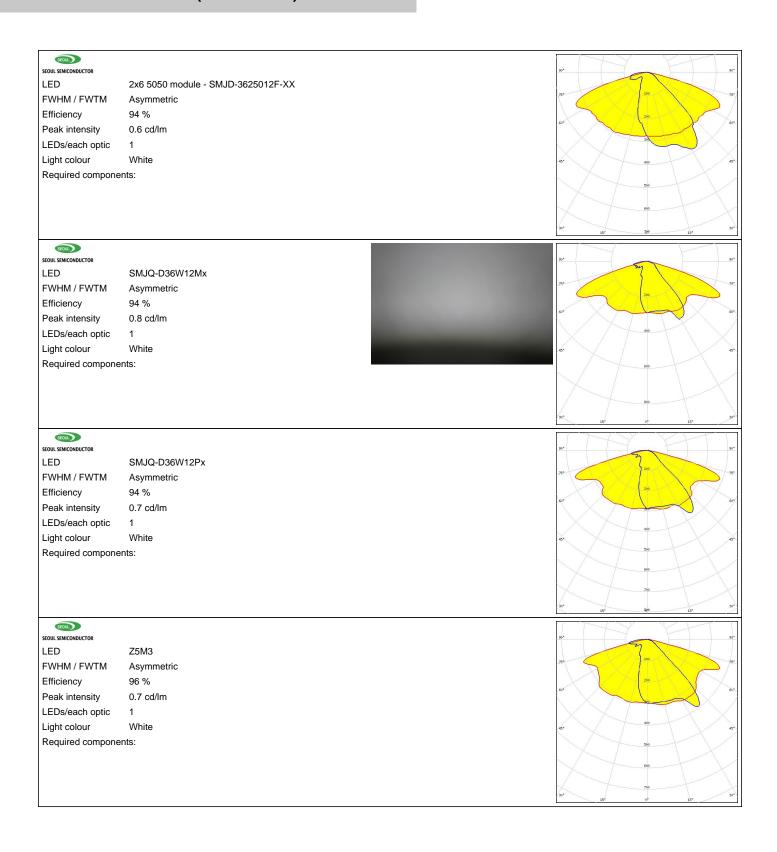



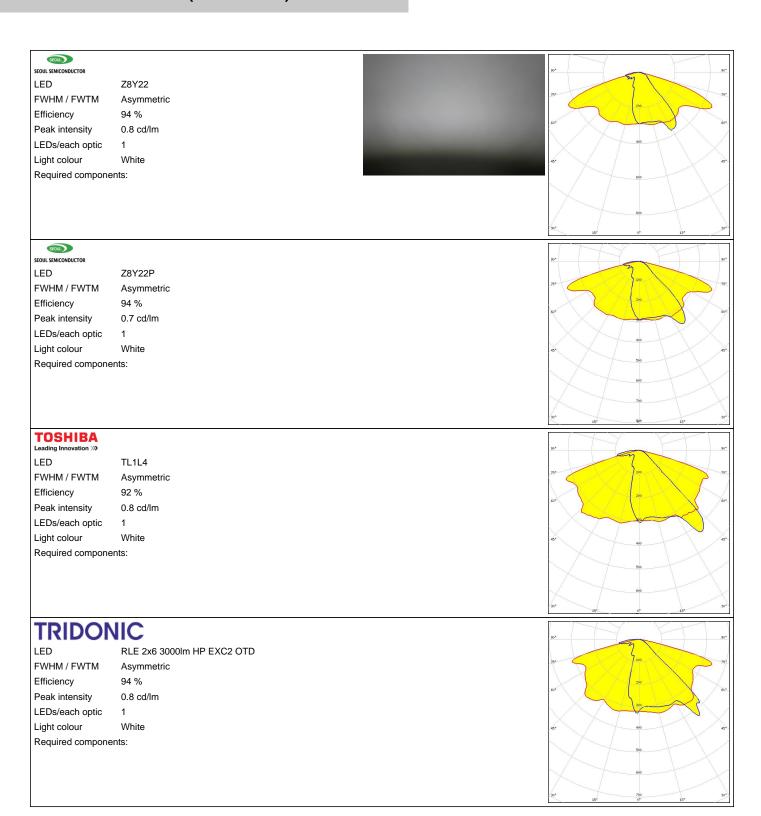




TRIDONIC

LED RLE 2x6 4500lm HP HE EXC3 OTD Z19

FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:








LED XHP35 HD

FWHM / FWTM Asymmetric Efficiency 88 %

Peak intensity 0.5 cd/lm LEDs/each optic 1

Light colour White

Required components:



CREE \$

LED XHP35 HI


FWHM / FWTM Asymmetric

Efficiency 90 %
Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:



CREE \$

LED XP-G2 HE


FWHM / FWTM Asymmetric

Efficiency 92 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:




CREE \$

LED XP-G3

FWHM / FWTM Asymmetric Efficiency 88 %

Peak intensity 0.6 cd/lm LEDs/each optic 1


Light colour White








LED NV4WB35AM
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White



WNICHIA


Required components:

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White




OSRAM

Required components:

LED PrevaLED Brick HP IP 2x6

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:






OSRAM

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric Efficiency 90 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White

Required components:




OSRAM

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour

Required components:




OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White


Required components:



PHILIPS

Fortimo FastFlex LED 2x6 DPX G4


FWHM / FWTM Asymmetric 88 % Efficiency Peak intensity 0.6 cd/lm LEDs/each optic White Light colour Required components:





SAMSUNG


LED LH351B
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White



SAMSUNG

Required components:


LED LH351D
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:



EOUL SEMICONDUCTOR


LED Acrich MJT 4040 FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White
Required components:



SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White









LED Z5M4 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White

Required components:



TOSHIBA

LED TL1L2 FWHM / FWTM Asymmetric Efficiency 88 % LEDs/each optic 1 White Light colour Required components:



TOSHIBA Leading Innovation >>>

LED TL1L3 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 95 % LEDs/each optic 1 Light colour White Required components:

