

STRADELLA-IP-28-T3-PC

IESNA Type III (medium) beam for roads that are equal to or wider than mounting height. Variant made from PC.

SPECIFICATION:

Dimensions	100.0 x 100.0 mm
Height	9.2 mm
Fastening	pin, screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ




LEDiL®

MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-IP-28-T3-PC	Multi-lens	PC	clear	
STRADELLA-28-SEAL	Seal	Silicone	white	


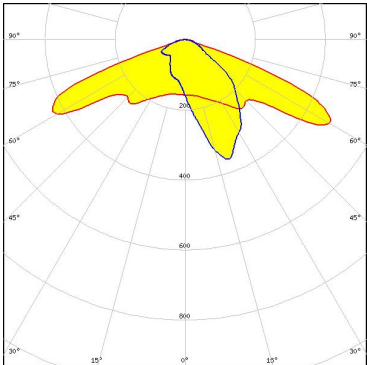

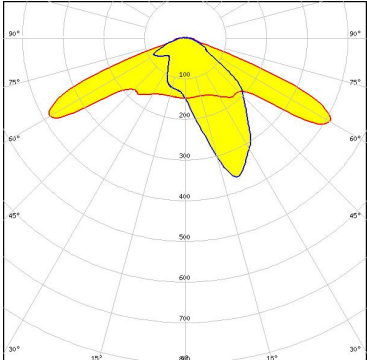

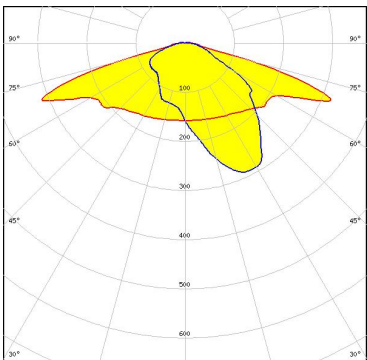

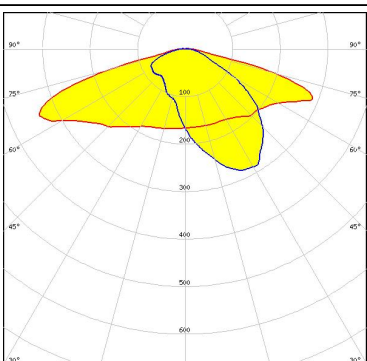
ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS16104_STRADELLA-IP-28-T3-PC » Box size: 476 x 273 x 247 mm	Multi-lens	156	78	78	6.3




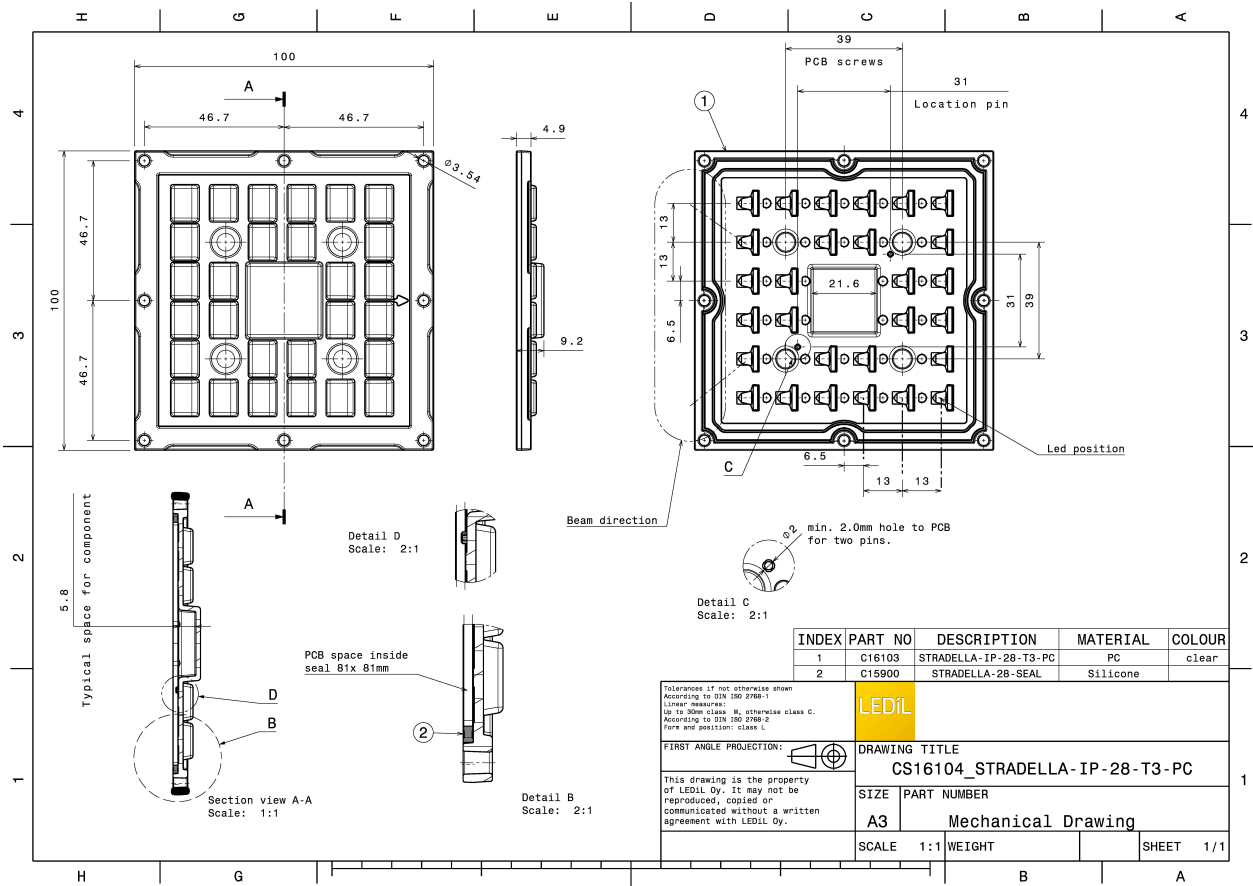


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):

 <p> LED HiQLED STR28 CR JE2835 4x7 xxx FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components: </p>	
 <p> LED HiQLED STR28 CR JK3030 4x7 xxx FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 1 cd/lm LEDs/each optic 1 Light colour White Required components: </p>	
 <p> LED QUICK FLUX STR28 XD2x14 xxx G8 FWHM / FWTM Asymmetric Efficiency 88 % Peak intensity 0.8 cd/lm LEDs/each optic 1 Light colour White Required components: </p>	
 <p> LED QUICK FLUX STR28 XP2x14 xxx G7 FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White Required components: </p>	


OPTICAL RESULTS (MEASURED):
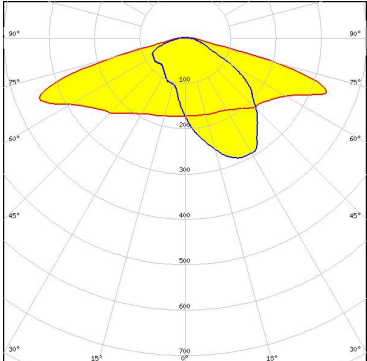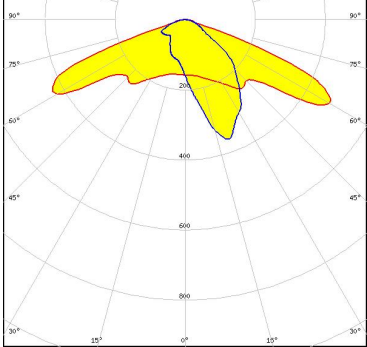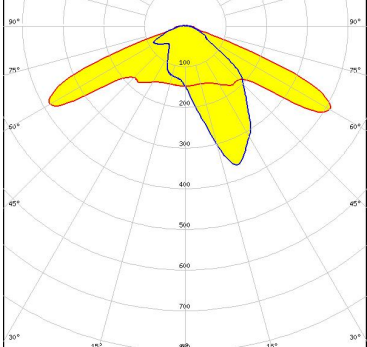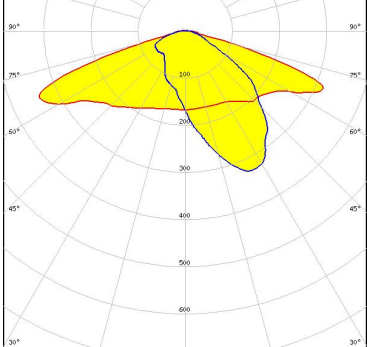
<p>COMET ELECTRONICS</p> <p>LED QUICK FLUX STR28 XT2x14 xxx G5 FWHM / FWTM Asymmetric Efficiency 90 % Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>CREE LEDs</p> <p>LED J Series 2835 FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>CREE LEDs</p> <p>LED J Series 3030 FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>CREE LEDs</p> <p>LED J Series 3030 FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 0.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	


OPTICAL RESULTS (MEASURED):





LED XD16
 FWHM / FWTM Asymmetric
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

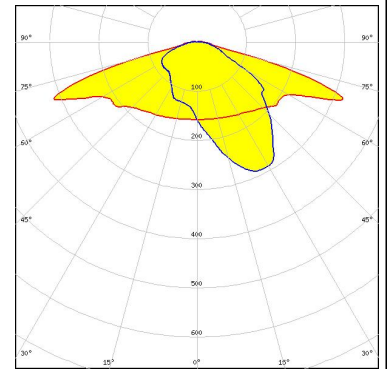


LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 86 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

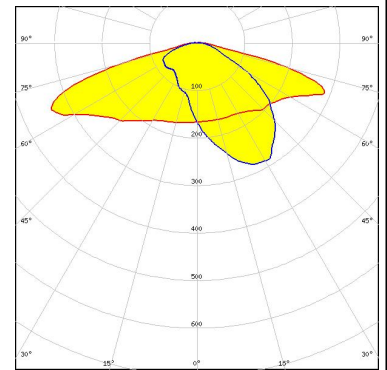





LED XT-E
 FWHM / FWTM Asymmetric
 Efficiency 90 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

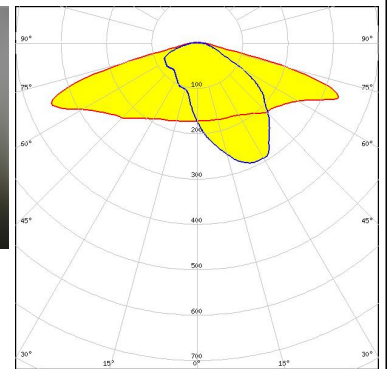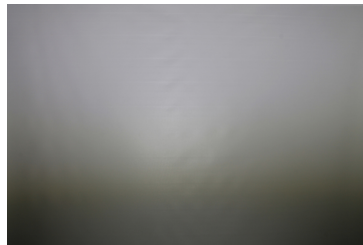

LED LUXEON 3030 2D (Round LES)
 FWHM / FWTM Asymmetric
 Efficiency 91 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

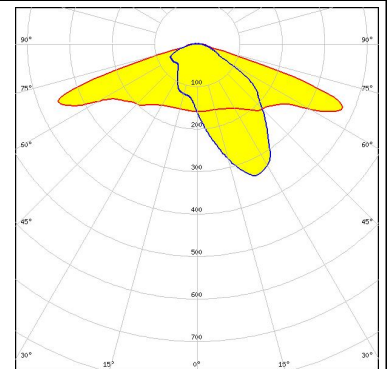


OPTICAL RESULTS (MEASURED):
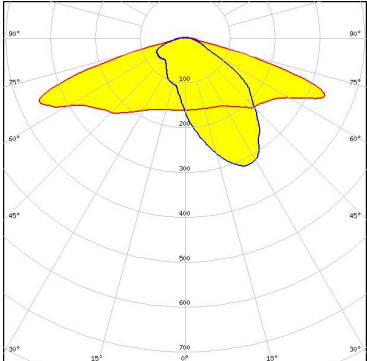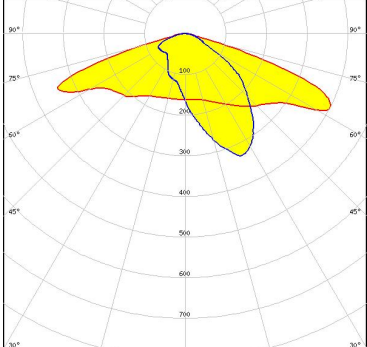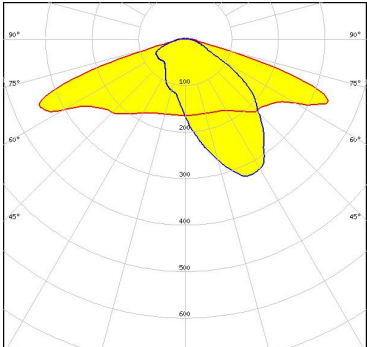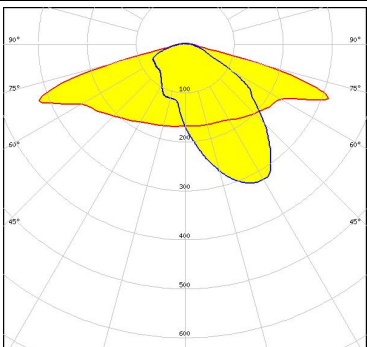
<p>NICHIA</p> <p>LED NF2x757G FWHM / FWTM Asymmetric Efficiency 90 % Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED Duris S5 (2 chip) FWHM / FWTM Asymmetric Efficiency 91 % Peak intensity 0.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ S 3030 (QSLR31) FWHM / FWTM Asymmetric Efficiency 91 % Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSLOM Square CSSRM2/CSSRM3 FWHM / FWTM Asymmetric Efficiency 90 % Peak intensity 0.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

OPTICAL RESULTS (MEASURED):


SAMSUNG

LED HiLOM SC28 (LH181B)
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

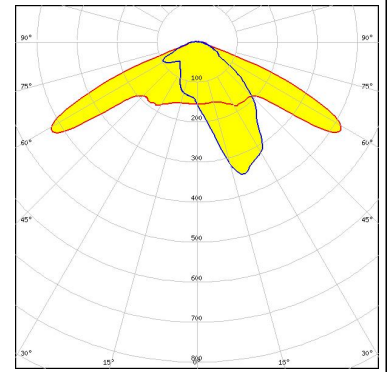

SAMSUNG


LED HiLOM SM28 (LM301B)
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

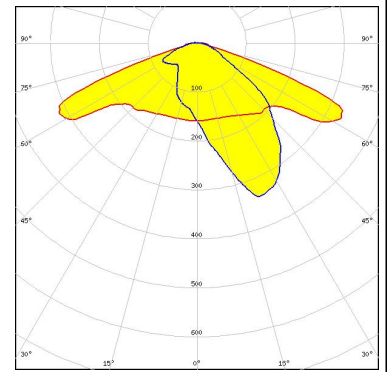

OPTICAL RESULTS (SIMULATED):


LUMILEDS

LED LUXEON HL2X
 FWHM / FWTM Asymmetric
 Efficiency 86 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

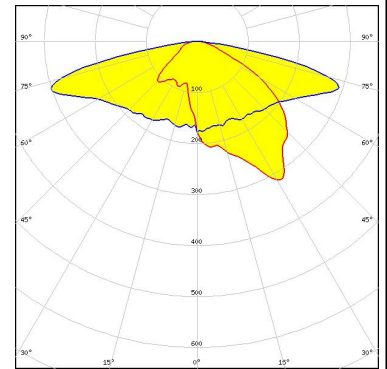


LUMILEDS

LED LUXEON V2
 FWHM / FWTM Asymmetric
 Efficiency 87 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

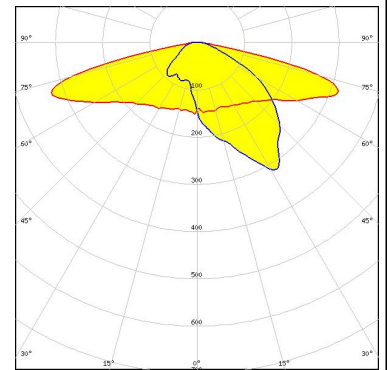


NICHIA

LED NVSW219F
 FWHM / FWTM Asymmetric
 Efficiency 84 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

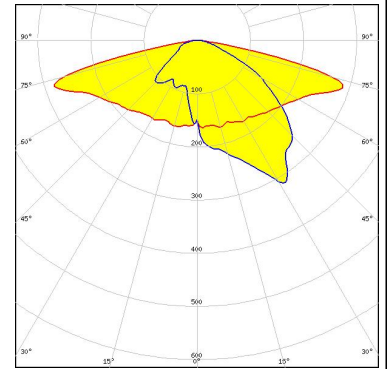

OSRAM Opto Semiconductors


LED OSCONIQ C 2424
 FWHM / FWTM Asymmetric
 Efficiency 85 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

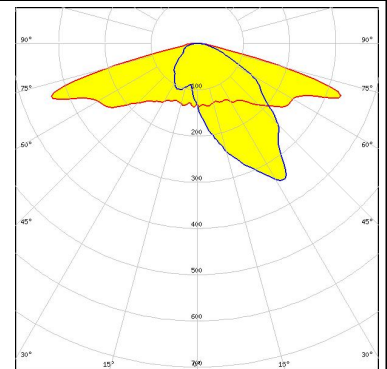

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LH231B
 FWHM / FWTM Asymmetric
 Efficiency 87 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

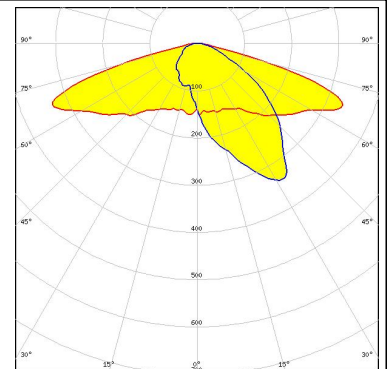


SAMSUNG

LED LH351B
 FWHM / FWTM Asymmetric
 Efficiency 85 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

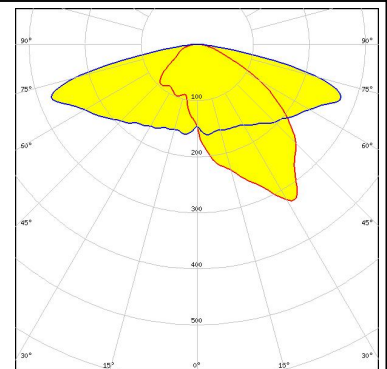


SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2
 FWHM / FWTM Asymmetric
 Efficiency 87 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

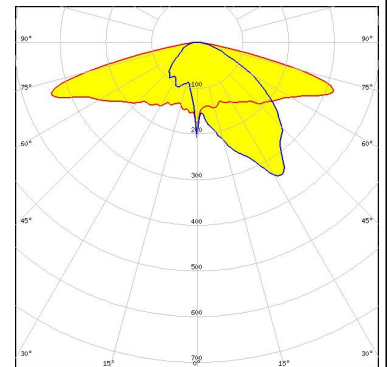

SEOUL SEMICONDUCTOR

LED Z8Y19
 FWHM / FWTM Asymmetric
 Efficiency 85 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

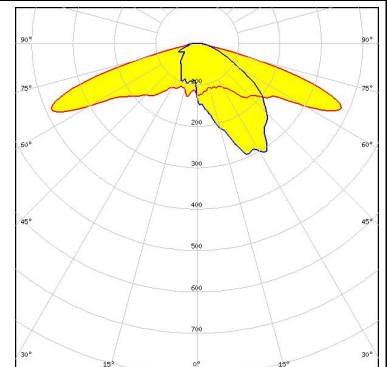

OPTICAL RESULTS (SIMULATED):

