

VICTORIA-IP-WWW-PC

~90° wide beam. Ingress protected version made from PC.

SPECIFICATION:

Dimensions	Ø 300.0 mm
Height	18.1 mm
Fastening	screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish
VICTORIA-WWW-PC	Multi-lens	PC	clear	
VICTORIA-O-RING	Seal	Silicone	milky	
VICTORIA-SEAL	Seal	Silicone	clear	


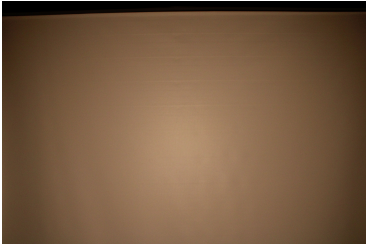
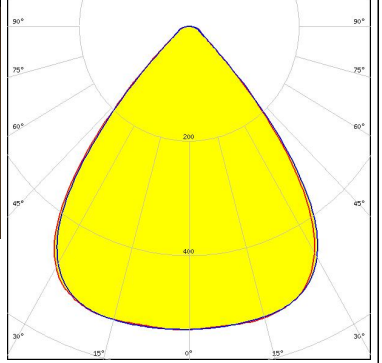

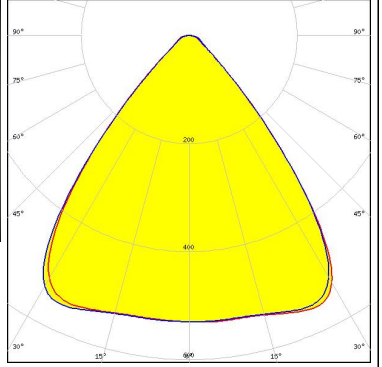
ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS17134_VICTORIA-IP-WWW-PC » Box size: 343 x 343 x 298 mm	Multi-lens	34	34	34	9.2

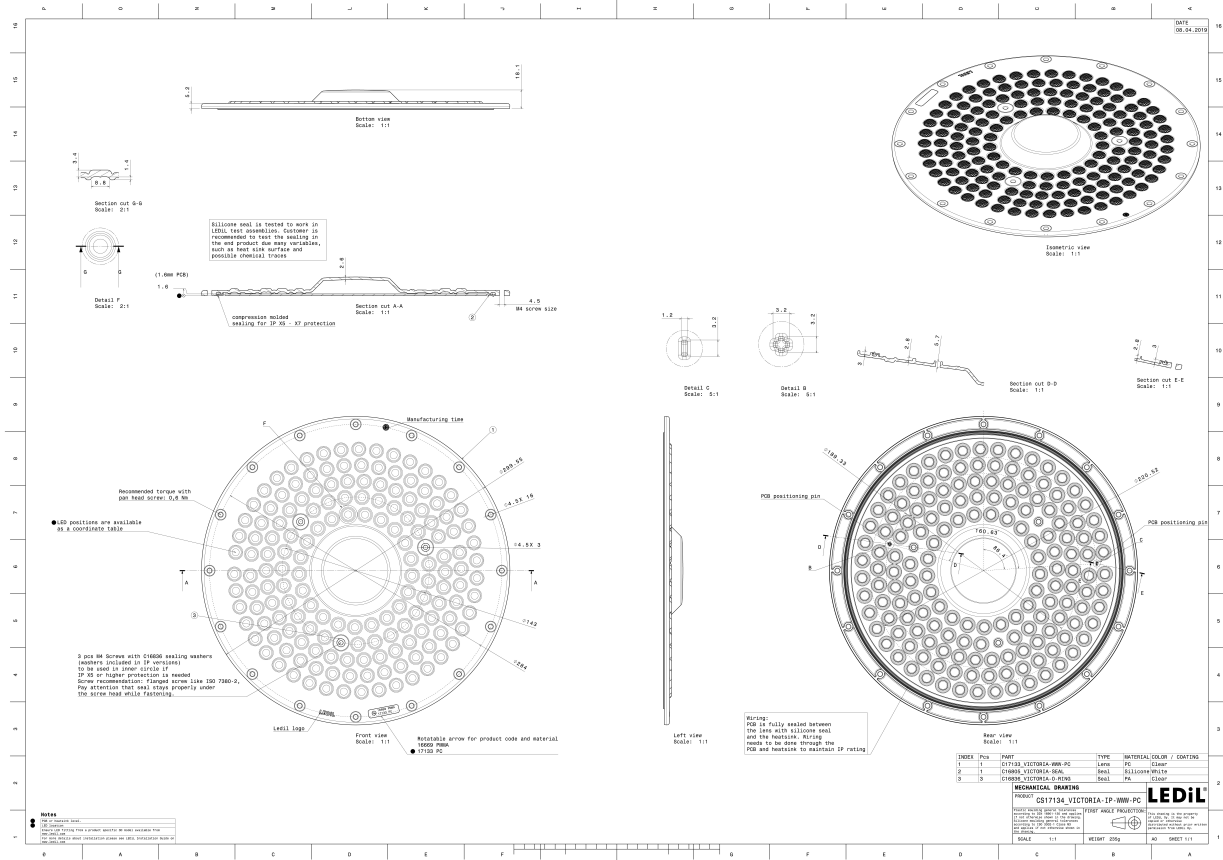

See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):

 LED: Victoria-PCB FWHM / FWTM: 81.0° / 105.0° Efficiency: 88 % Peak intensity: 0.5 cd/lm LEDs/each optic: 2 Light colour: White Required components:		
SAMSUNG LED: HiLOM HCF0 (LH181B) FWHM / FWTM: 79.0° / 102.0° Efficiency: 90 % Peak intensity: 0.6 cd/lm LEDs/each optic: 1 Light colour: White Required components:		


OPTICAL RESULTS (SIMULATED):




LED J Series 2835
 FWHM / FWTM 91.0° / 110.0°
 Efficiency 91 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

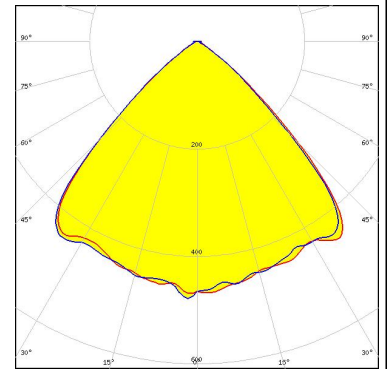


LED LUXEON 2835 Line
 FWHM / FWTM 90.0° / 109.0°
 Efficiency 91 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

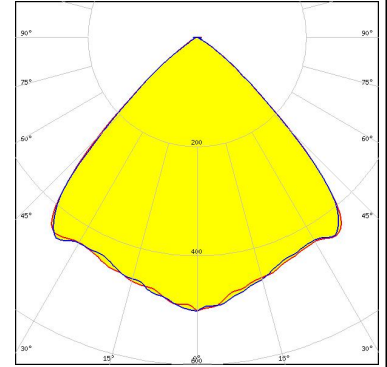

LED LUXEON 2835 Line
 FWHM / FWTM 92.0° / 115.0°
 Efficiency 90 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:

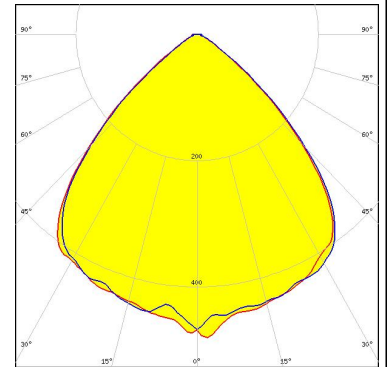


LED Duris E 2835
 FWHM / FWTM 89.0° / 109.0°
 Efficiency 91 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

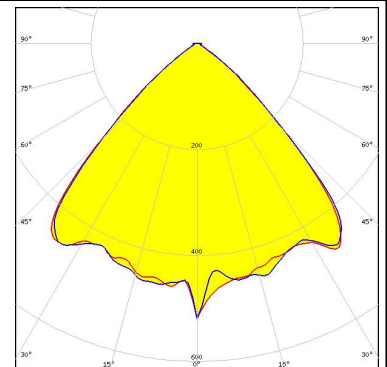

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM28xB Series
 FWHM / FWTM 91.0° / 110.0°
 Efficiency 91 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

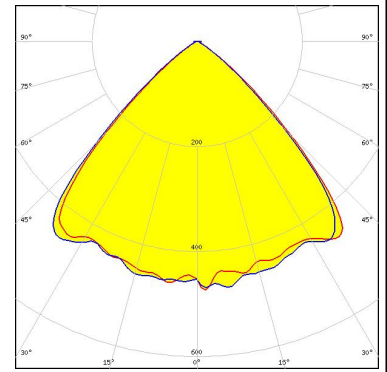


SAMSUNG

LED LM302D
 FWHM / FWTM 71.0° / 95.0°
 Efficiency 84 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:

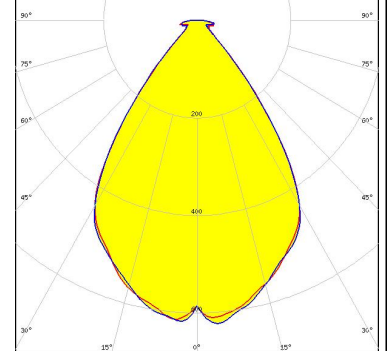

SEOUL SEMICONDUCTOR
 LED SEOUL DC 3528
 FWHM / FWTM 93.0° / 118.0°
 Efficiency 91 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:

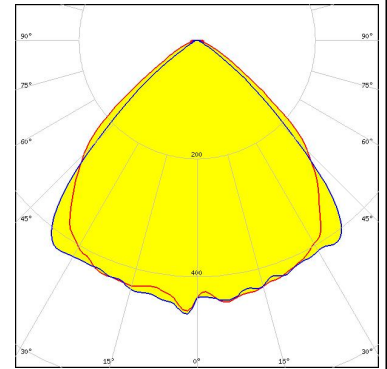

SEOUL SEMICONDUCTOR
 LED SEOUL DC 3528
 FWHM / FWTM 88.0° / 110.0°
 Efficiency 91 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

