

STRADA-IP-2X6-DWC-B-PC

Universal road lighting (IESNA Type II Medium) beam with excellent mixed illuminance, luminance uniformity and minimized backlight. Variant made from PC.

SPECIFICATION:

Dimensions	173.0 x 71.4 mm
Height	8.9 mm
Fastening	screw
Ingress protection classes	IP67
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish
STRADA-IP-2X6-DWC-B-PC	Multi-lens	PC	clear	
2X6-SEAL25	Seal	Silicone	white	

ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS17252_STRADA-IP-2X6-DWC-B-PC	Multi-lens	120	40	40	7.4
» Box size: 476 x 273 x 247 mm					

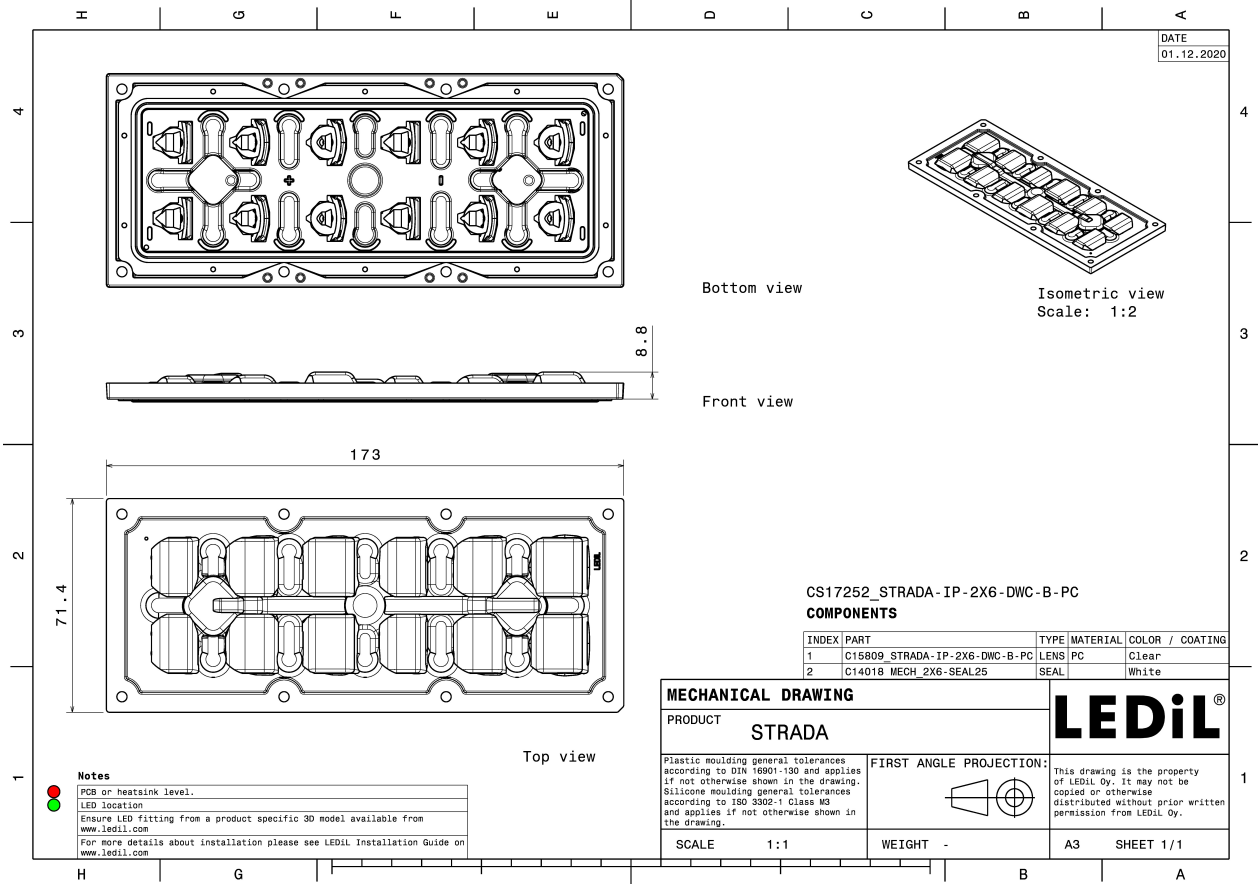


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):



LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

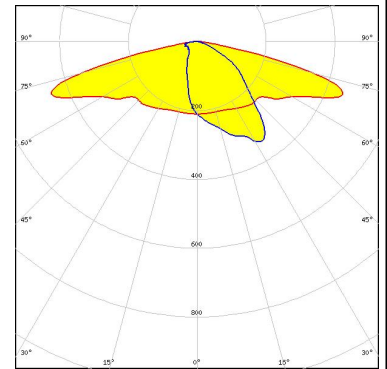


LED LH502D
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

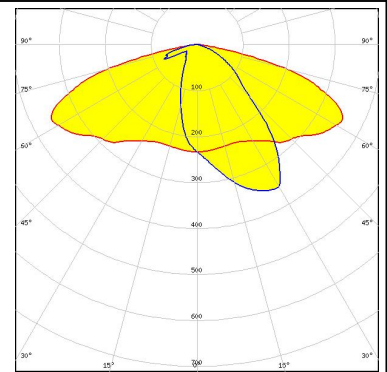

OPTICAL RESULTS (SIMULATED):


OSRAM

LED PrevaLED Brick HP IP 2x6
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

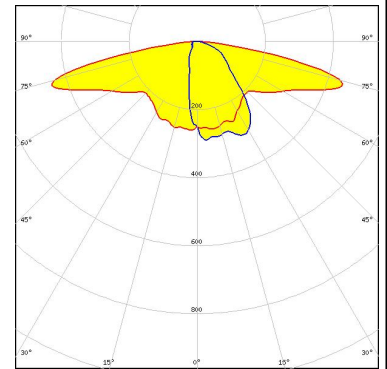

SAMSUNG

LED LH502C
FWHM / FWTM Asymmetric
Efficiency 88 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

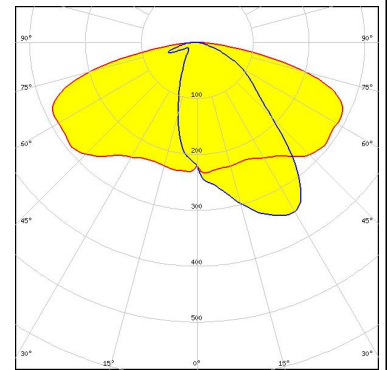

SAMSUNG

LED LH502D
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass

