


## STRADELLA-IP-64-T4-B

Wide IESNA Type IV forward-throw beam for wide area lighting like car parks.

### SPECIFICATION:

Dimensions	x mm
Height	0 mm
Fastening	pin, screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ

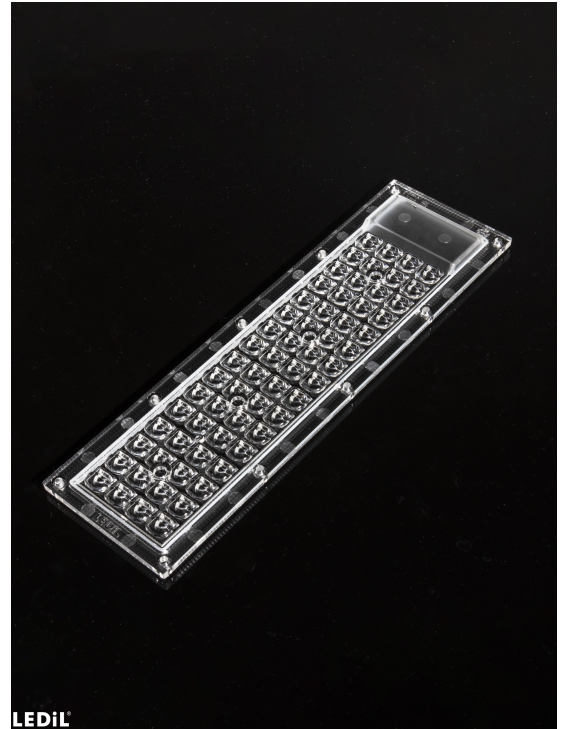


### MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-IP-64-T4-B	Multi-lens	PMMA	clear	
STRADELLA-IP-64-SEAL	Seal	Silicone	milky	

### ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS17642_STRADELLA-IP-64-T4-B » Box size: 476 x 273 x 247 mm	Multi-lens	108	108	36	9.2

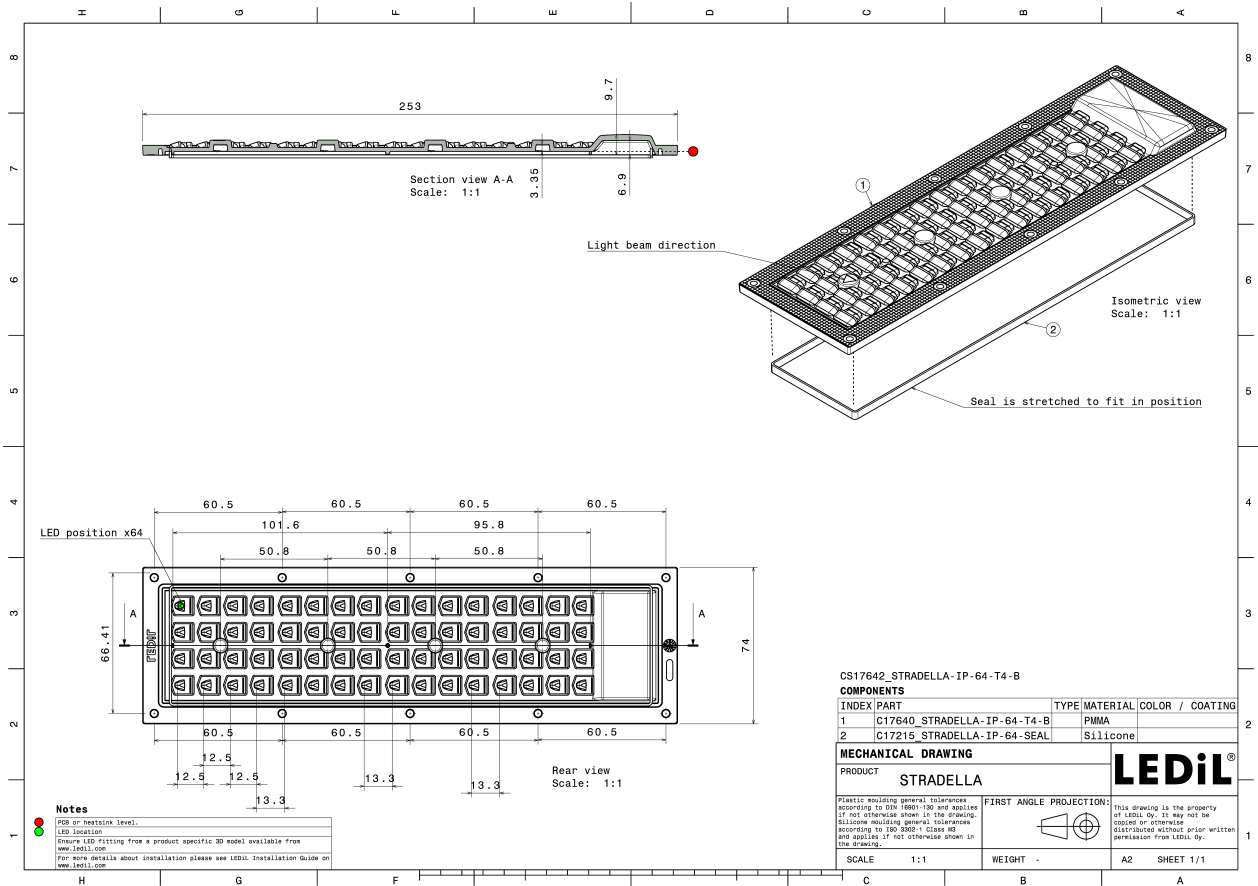


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):


#### OSRAM

LED PrevaLED Brick MP 4x16  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

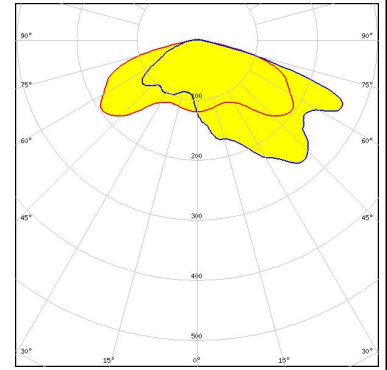

#### TRIDONIC


LED RLE 4x16 4000lm MP ADV2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

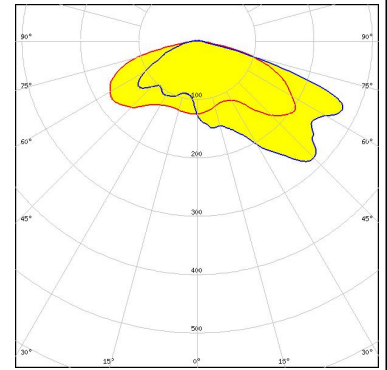

#### OPTICAL RESULTS (SIMULATED):

### PHILIPS

LED	Fortimo FastFlex LED 4x16 DHE G4
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

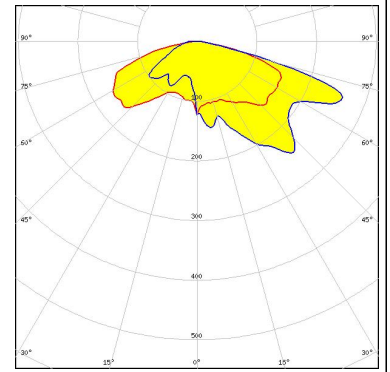

### SAMSUNG

LED	HiLOM RM64 (LM301B)
FWHM / FWTM	Asymmetric
Efficiency	87 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

