


## STRADELLA-IP-64-T4-B-PC

Wide IESNA Type IV forward-throw beam for wide area lighting like car parks. Variant made from PC.

### SPECIFICATION:

Dimensions	x mm
Height	0 mm
Fastening	pin, screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ

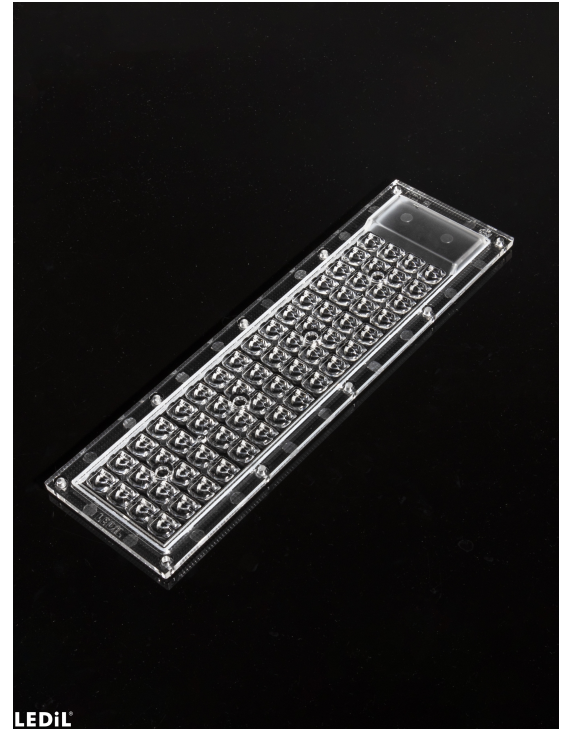


### MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-IP-64-T4-B-PC	Multi-lens	PC	clear	
STRADELLA-IP-64-SEAL	Seal	Silicone	milky	

### ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS17643_STRADELLA-IP-64-T4-B-PC	Multi-lens	108	108	36	9.1
» Box size: 476 x 273 x 247 mm					

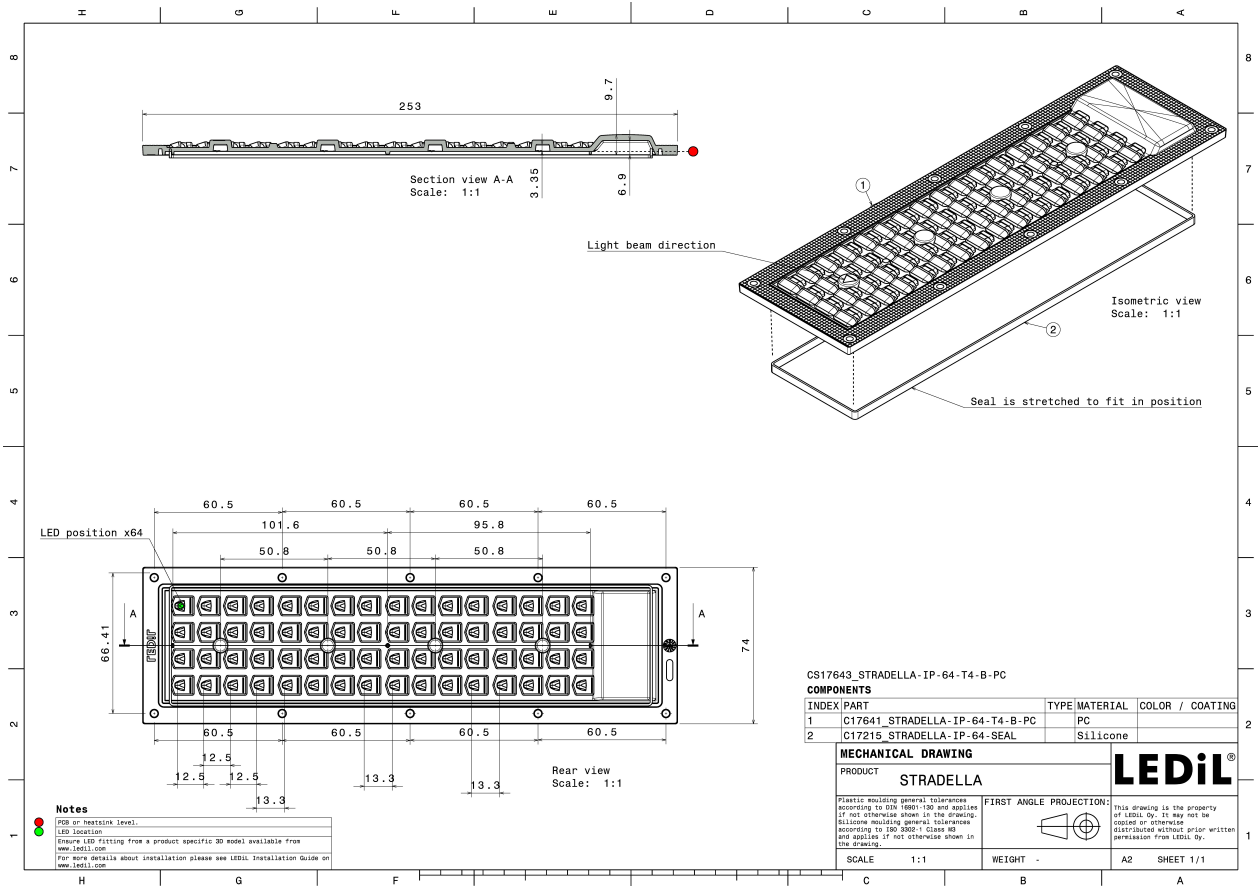


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):

#### OSRAM


LED PrevaLED Brick MP 4x16  
FWHM / FWTM Asymmetric  
Efficiency 86 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

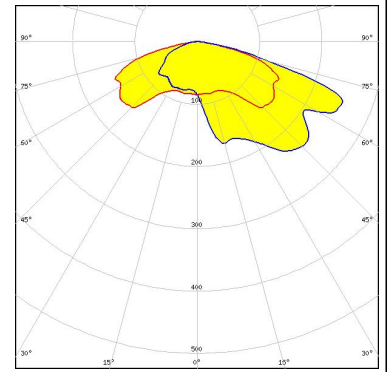

#### OPTICAL RESULTS (SIMULATED):


#### PHILIPS

LED Fortimo FastFlex LED 4x16 DHE G4  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

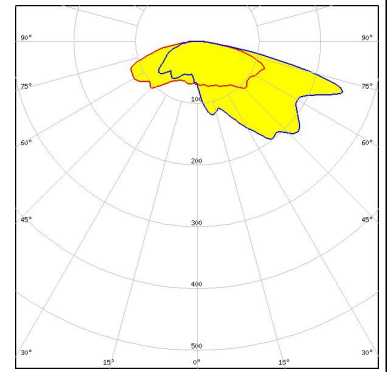

#### SAMSUNG

LED HiLOM RM64 (LM301B)  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

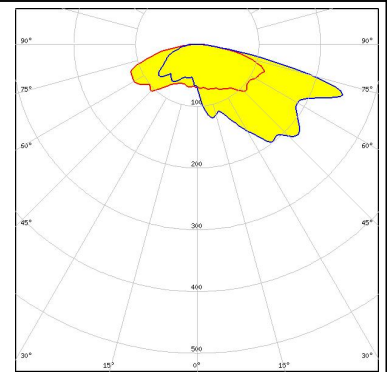

#### TRIDONIC

LED RLE 4x16 4000lm MP ADV2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

