


STRADA-IP-24-VSM-PC

IESNA Type V (square) beam for wide areas lighting such as car parks. Variant made from PC.

SPECIFICATION:

Dimensions	173.0 x 71.4 mm
Height	9.8 mm
Fastening	pin, screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ


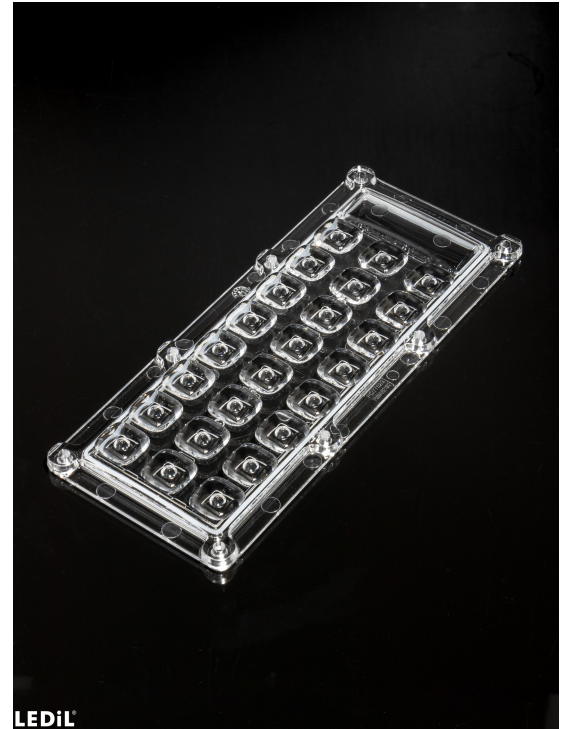


MATERIALS:

Component	Type	Material	Colour	Finish
STRADA-IP-24-VSM-PC	Multi-lens	PC	clear	
STRADA-IP-24-SEAL	Seal	Silicone	white	

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CS17761_STRADA-IP-24-VSM-PC » Box size: 476 x 273 x 247 mm	120	120	40	6.8

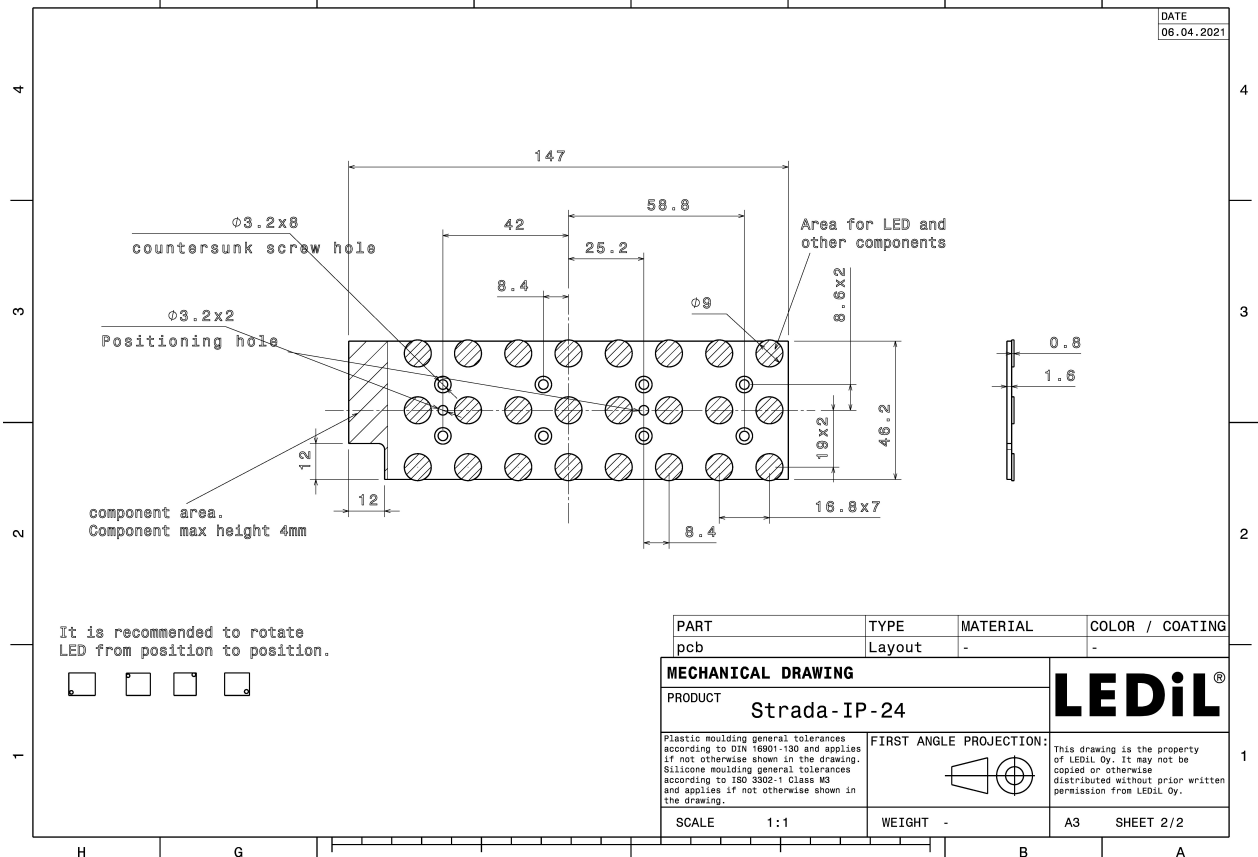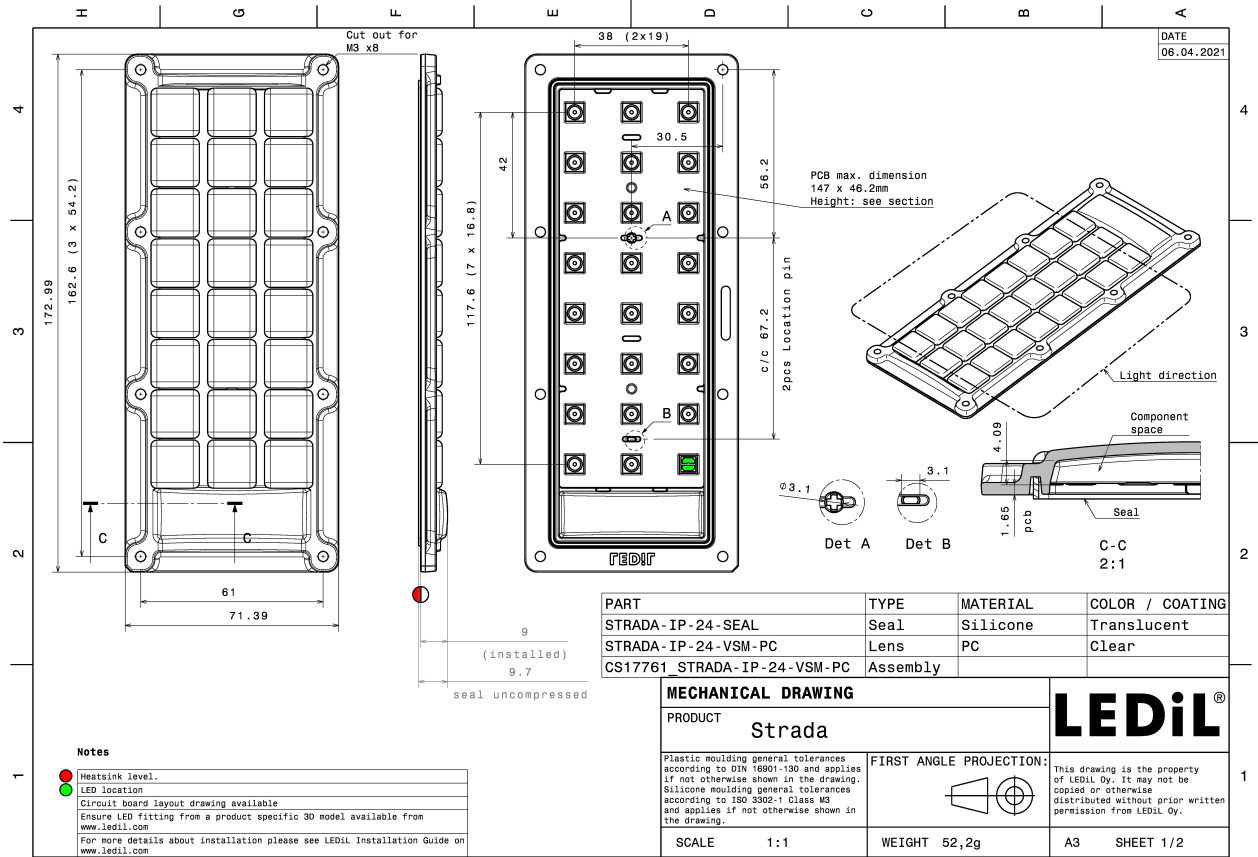


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):



LED LIGHT ENGINE STRADA-IP 24 LEDs 147.4 x 46.2 x 1.5
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

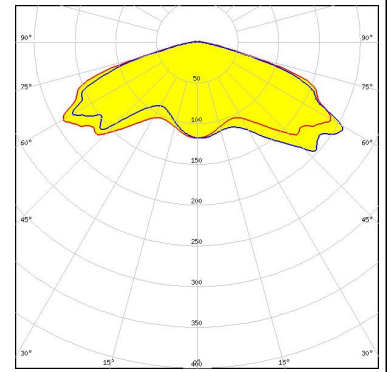


LED HiLOM RM24 ZP (LH502D)
FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

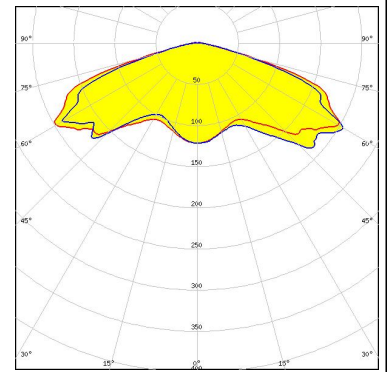


OPTICAL RESULTS (SIMULATED):




LED J Series 5050 Round LES
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

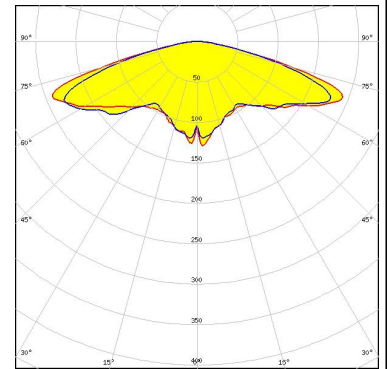


LED J Series 5050B 30V K Class
 FWHM / FWTM Asymmetric
 Efficiency 75 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

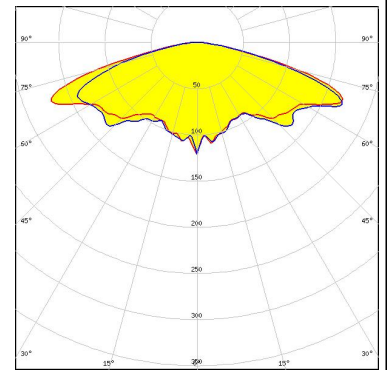

LED J Series 5050B 6V K Class
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

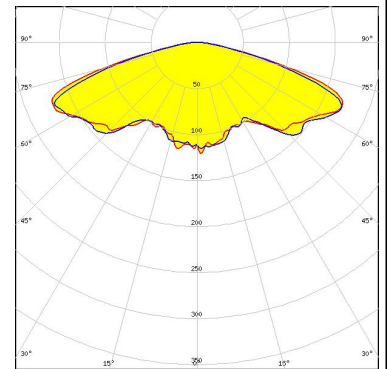


LED LUXEON 5050 HE
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

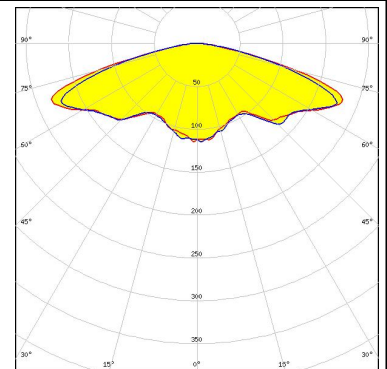

OPTICAL RESULTS (SIMULATED):


LUMILEDS

LED LUXEON 5050 Round LES
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

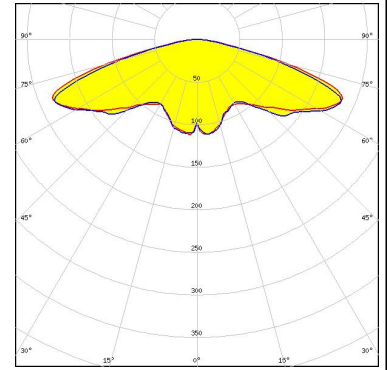


LUMILEDS

LED LUXEON 5050 Square LES
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

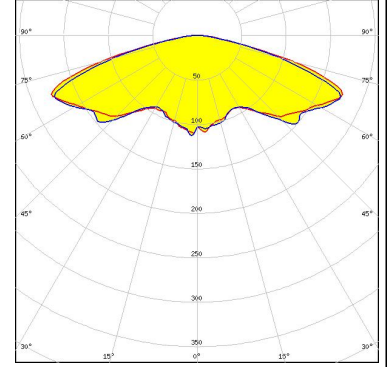

Your solutions


LED RecLED 147x47mm 5800lm 7x0 5050 STRADA-IP-24 G2
 FWHM / FWTM Asymmetric
 Efficiency 80 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

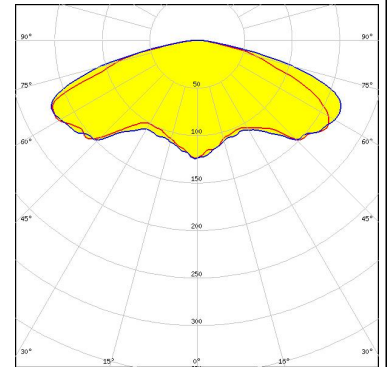

OSRAM

Opto Semiconductors


LED Duris S8
 FWHM / FWTM Asymmetric
 Efficiency 82 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

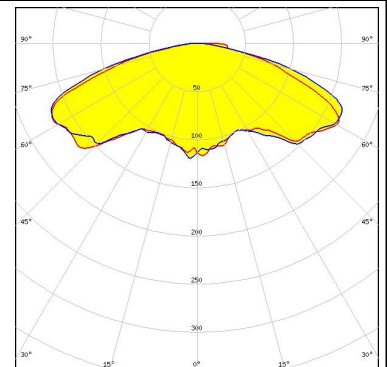

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LH502C
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

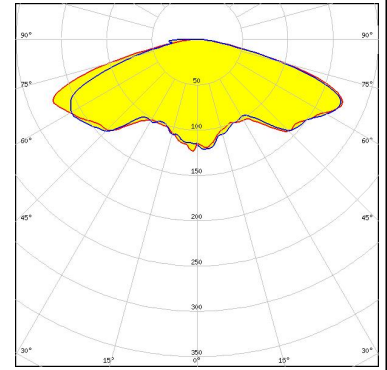

SAMSUNG

LED LH502D
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

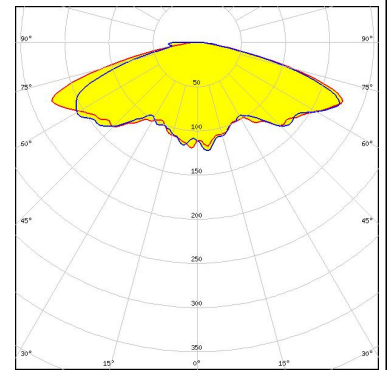

SEOUL SEMICONDUCTOR

LED SEOUL DC 5050 6V
 FWHM / FWTM Asymmetric
 Efficiency 81 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

