

SPORT-IP-24-FT6W

Wide forward throw beam with optimized cut-off for high masts

SPECIFICATION:

Dimensions	173.0 x 71.4 mm
Height	10.9 mm
Fastening	pin, screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ





MATERIALS:

Component	Type	Material	Colour	Finish
SPORT-IP-24-FT6W	Multi-lens	PMMA	clear	
STRADA-IP-24-SEAL	Seal	Silicone	white	

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CS18971_SPORT-IP-24-FT6W » Box size: 476 x 273 x 247 mm	120	120	40	8.5

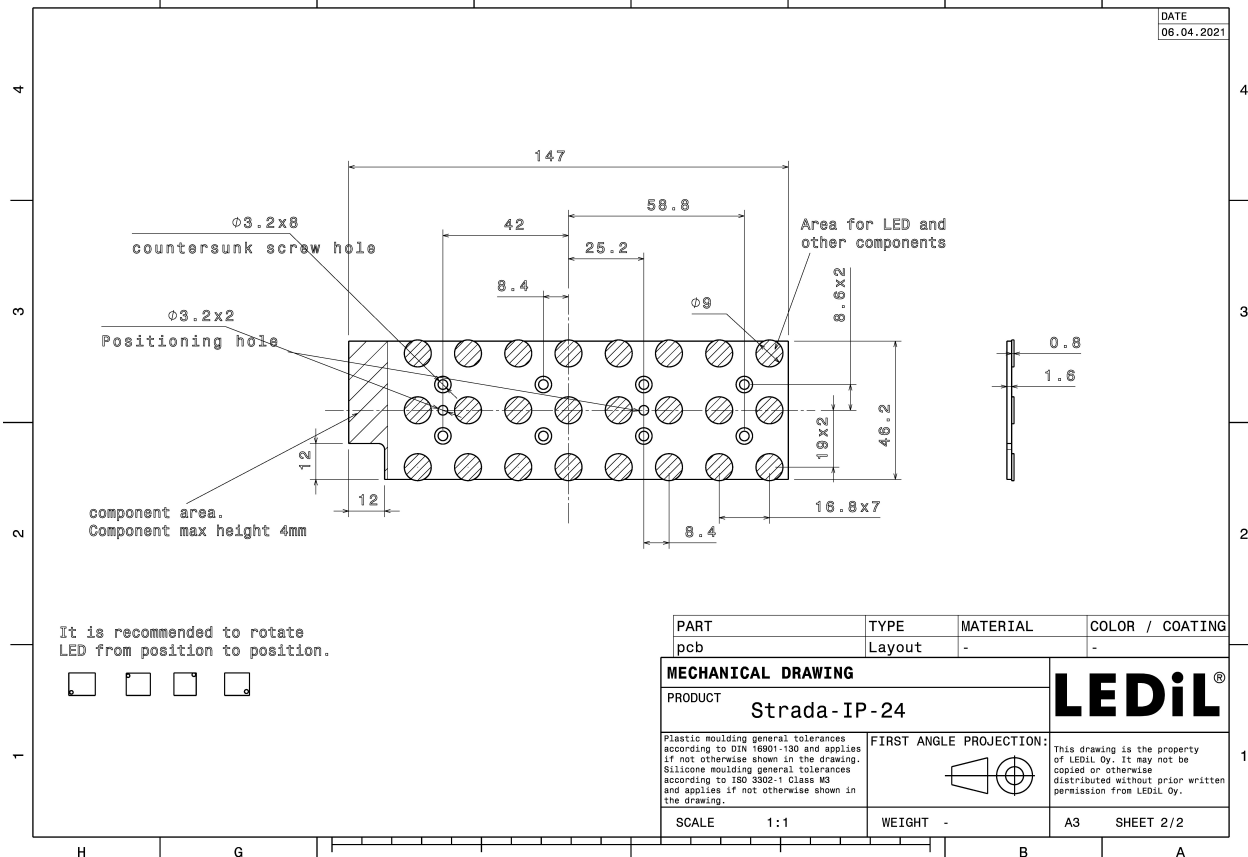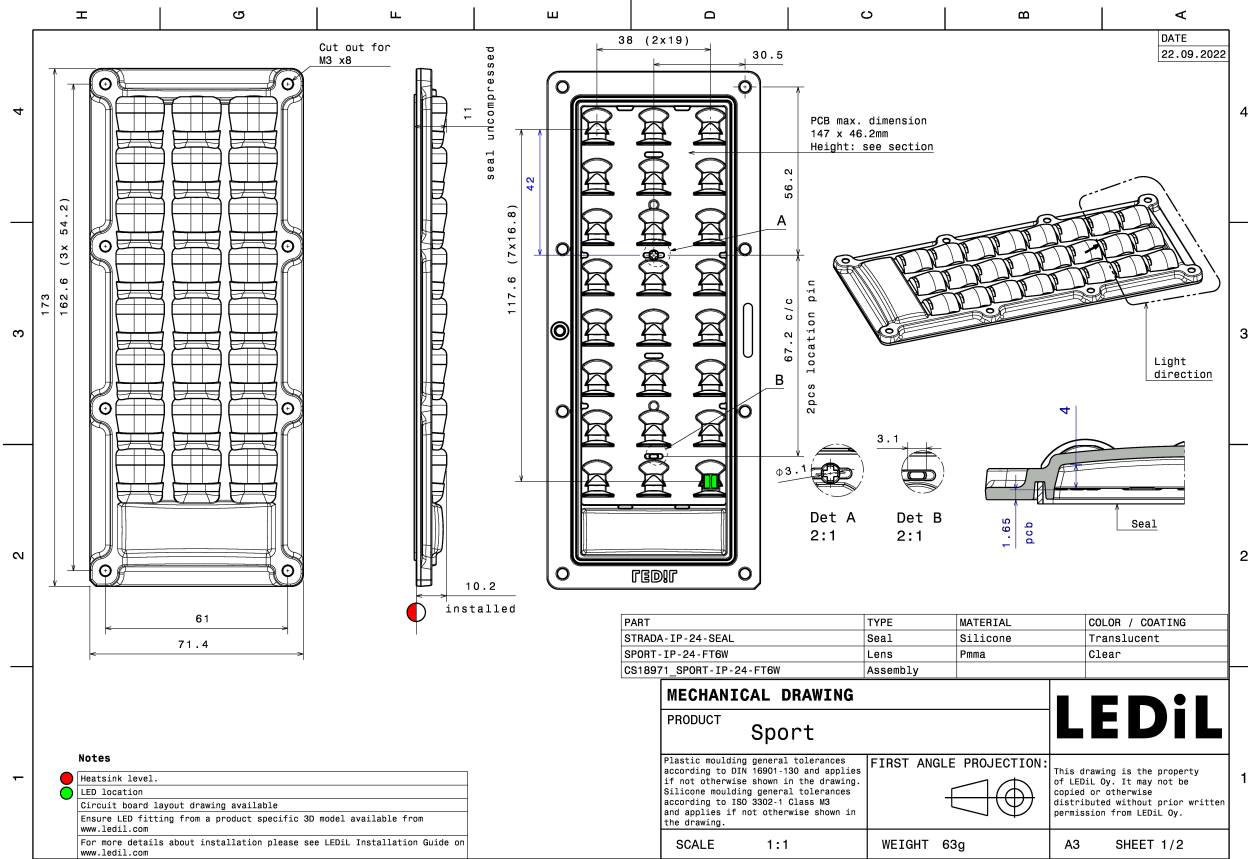


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (SIMULATED):




LED J Series 5050 Round LES
 FWHM / FWTM Asymmetric
 Efficiency 92 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

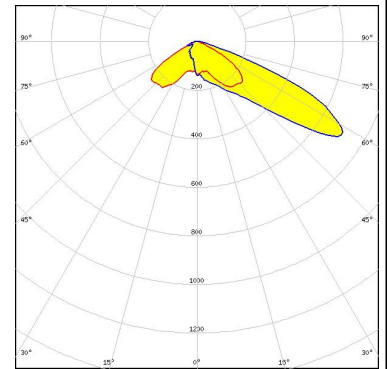


LED J Series 5050 Square LES 6V
 FWHM / FWTM Asymmetric
 Efficiency 92 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

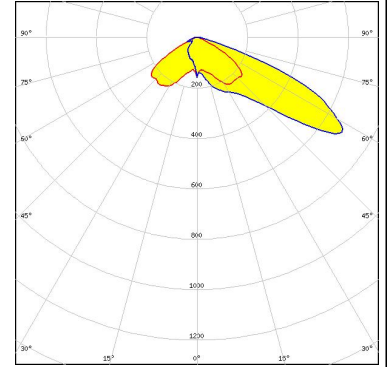

LED LUXEON 5050 HE
 FWHM / FWTM 121.0 + 24.0° / 138.0 + 100.0°
 Efficiency 85 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

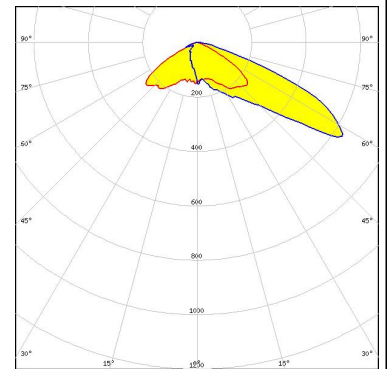

LED LUXEON 5050 Square LES
 FWHM / FWTM Asymmetric
 Efficiency 92 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

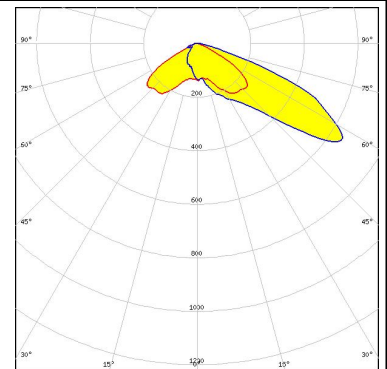

OPTICAL RESULTS (SIMULATED):



LED	NV4WB35AM
FWHM / FWTM	Asymmetric
Efficiency	92 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

