



CT433

XtremeSense® TMR Current Sensor with High dV/dt Immunity, 5kV Isolation and Common-Mode Field Rejection

FEATURES

- Integrated Contact Current Sensing for Low to Medium Current Ranges:
 - 0 A to +20 A
 - -20 A to +20 A
 - 0 A to +30 A
 - -30 A to +30 A
 - -40 A to +40 A
 - 0 A to +50 A
 - -50 A to +50 A
 - 0 A to +65 A
 - -65 A to +65 A
- Optimized for high dV/dt applications
- Integrated Current Carrying Conductor (CCC)
- Linear Analog Output Voltage
- Total Error Output $\leq \pm 1.0\%$ FS, -40°C to $+125^{\circ}\text{C}$
- 1 MHz Bandwidth
- Response Time: ~ 300 ns
- UL/IEC 62368-1 and UL1577 Certification
 - Rated Isolation Voltage: 5 kV_{RMS}
 - Working Voltage for Basic Isolation: $1287\text{ V}_{\text{RMS}}$
 - Working Voltage for Reinforced Isolation: $647\text{ V}_{\text{RMS}}$
- IEC 61000-4-5 Certified
- Low Noise: $9.5\text{ mA}_{\text{RMS}}$ to $19.0\text{ mA}_{\text{RMS}}$ @ $f_{\text{BW}} = 100\text{ kHz}$
- Immunity to Common Mode Fields: -54 dB
- Supply Voltage: 3.0 V to 3.6 V
- AEC-Q100 Grade 1 (Under Qualification)
- 16-Lead SOIC-Wide Package

PRODUCT DESCRIPTION

The CT433 is a high bandwidth and ultra-low noise integrated contact current sensor that uses Crocus Technology's patented XtremeSense® TMR technology to enable high accuracy current measurements for many consumer, enterprise, and industrial applications. It supports multiple current ranges where the integrated current carrying conductor (CCC) will handle up to 65 A of current and generates a current measurement as a linear analog output voltage. It achieves a total output error of less than $\pm 1.0\%$ full-scale (FS) over supply voltage and the full temperature range.

It has about a 300 ns output response time while the current consumption is about 6.0 mA and is immune to common mode fields. The CT433 was optimized for high dV/dt applications which minimizes capacitive coupling to V_{OUT} allowing CT433 to be used in switching applications.

The CT433 is offered in an industry standard 16-lead SOIC-Wide package that is "green" and RoHS compliant.

APPLICATIONS

- Power Inverters
- UPS, SMPS and Telecom Power Supplies
- Motor Control
- Over-Current Fault Protection

PACKAGE: 16-lead SOICW



TÜV Certificate No.:
R 72226133 0001



UL Certificate No.:
UL-CA-2201235-0

Part Ordering Information

| Part Number | Current Range (I _{PMAX}) | Sensitivity (mV/A) | Operating Temperature Range | Package | Packing Method |
|-------------------------|------------------------------------|--------------------|-----------------------------|--|----------------|
| CT433-HSWF20MR | ±20 | 50 | -40°C to +125°C | 16-lead SOIC-Wide 10.21 x 10.31 x 2.54 mm | Tape & Reel |
| CT433-HSWF30MR | ±30 | 33.3 | | | |
| CT433-HSWF40MR | ±40 | 25 | | | |
| CT433-HSWF50MR | ±50 | 20 | | | |
| CT433-HSWF65MR | ±65 | 15.4 | | | |
| CT433-HSWF20DR | 20 | 100 | | | |
| CT433-HSWF30DR | 30 | 66.7 | | | |
| CT433-HSWF50DR | 50 | 40 | | | |
| CT433-HSWF65DR | 65 | 30.8 | | | |
| AEC-Q100 Grade 1 | | | | | |
| CT433-ASWF20MR | ±20 | 50 | Grade 1 -40°C to +125°C | 16-lead SOIC-Wide 10.21 x 10.31 x 2.54 mm | Tape & Reel |
| CT433-ASWF30MR | ±30 | 33.3 | | | |
| CT433-ASWF50MR | ±50 | 20 | | | |
| CT433-ASWF65MR | ±65 | 15.4 | | | |
| CT433-ASWF20DR | 20 | 100 | | | |
| CT433-ASWF30DR | 30 | 66.7 | | | |
| CT433-ASWF50DR | 50 | 40 | | | |
| CT433-ASWF65DR | 65 | 30.8 | | | |

Evaluation Board Ordering Information

| Part Number | Current Range | Operating Temperature Range |
|-------------|----------------|-----------------------------|
| CTD433-20DC | 0 A to +20 A | -40°C to +125°C |
| CTD433-20AC | -20 A to +20 A | |
| CTD433-30DC | 0 A to +30 A | |
| CTD433-30AC | -30 A to +30 A | |
| CTD433-50DC | 0 A to +50 A | |
| CTD433-50AC | -50 A to +50 A | |
| CTD433-65DC | 0 A to +65 A | |
| CTD433-65AC | -65 A to +65 A | |

Block Diagram

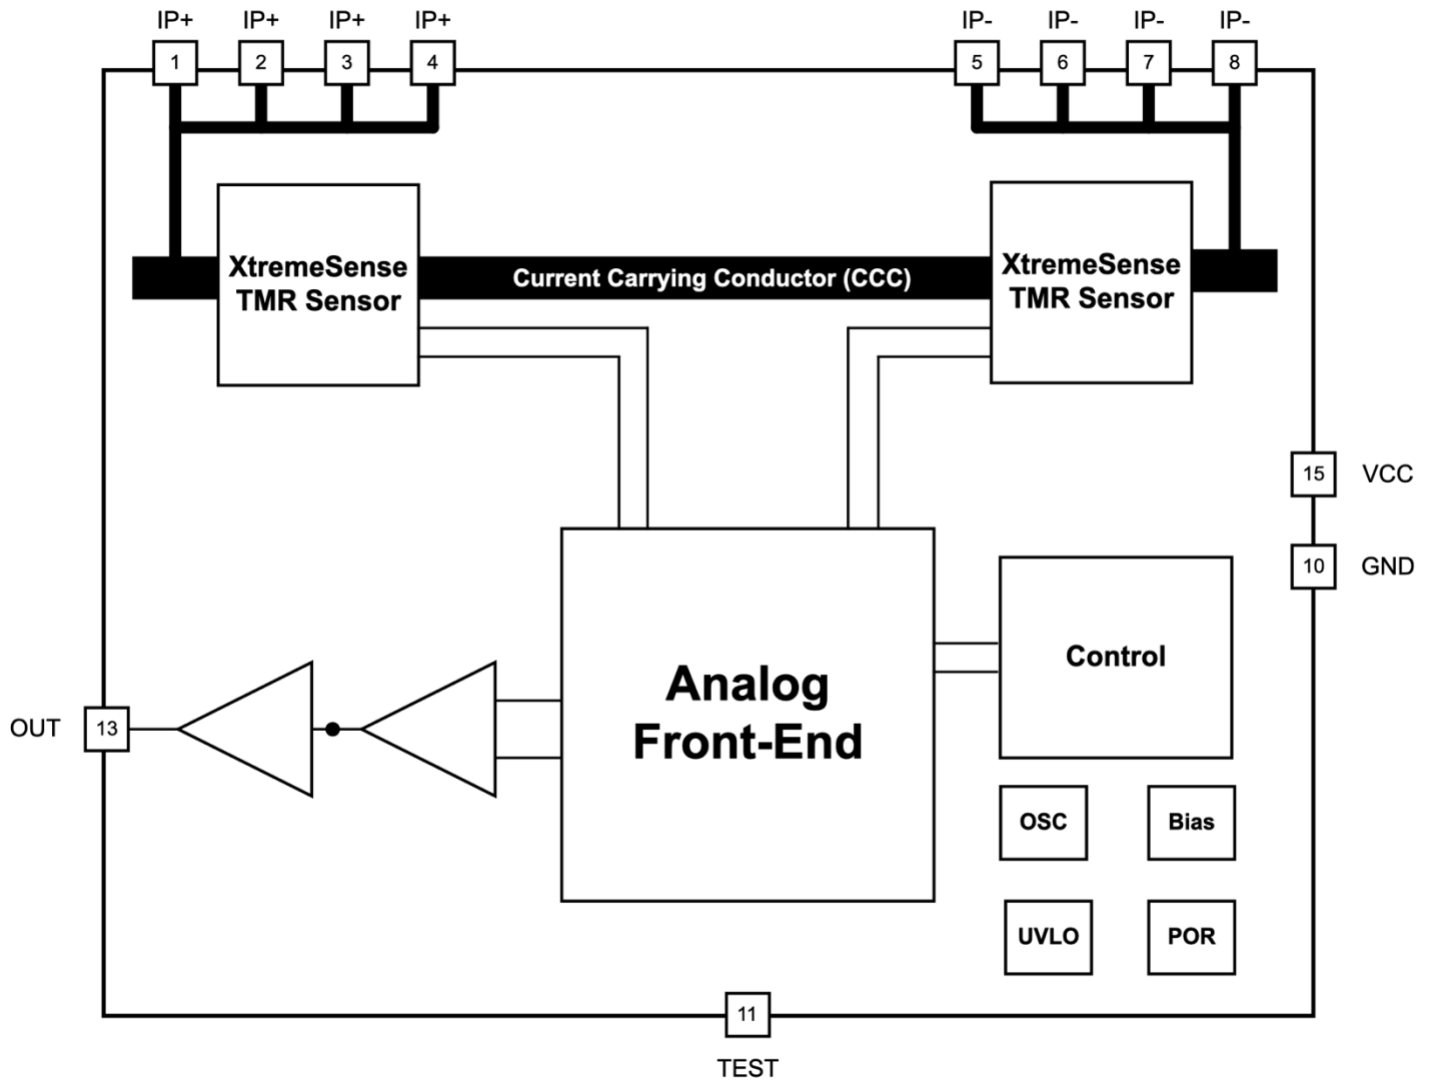


Figure 1. CT433 Functional Block Diagram for 16-lead SOIC-Wide Package

CT433 Pin Configuration

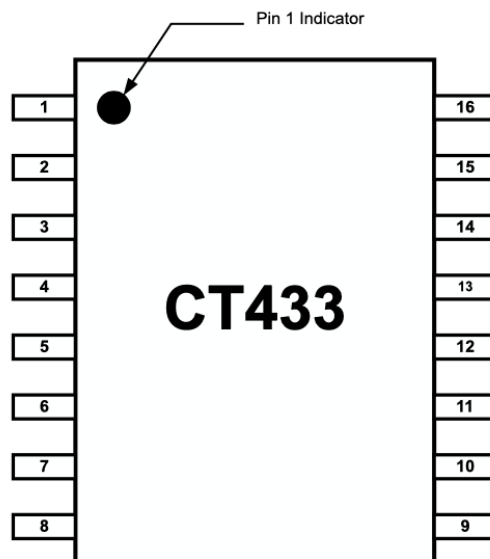


Figure 2. CT433 Pin-out Diagram for 16-lead SOIC-Wide Package (Top-Down View)

Pin Definition

| Pin # | Pin Name | Pin Description |
|-------|----------|---|
| 1 | IP+ | Terminal for primary conductor (positive). |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | IP- | Terminal for primary conductor (negative). |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | N/C | No connect. |
| 10 | GND | Ground. |
| 11 | TEST | Pin used for factory calibration. Connect to Ground. |
| 12 | N/C | No connect. |
| 13 | OUT | Analog output voltage that represents the measured current. |
| 14 | N/C | No connect. |
| 15 | VCC | Supply voltage. |
| 16 | N/C | No connect. |

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the CT433 and may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol | Parameter | | Min. | Max. | Unit |
|----------------------|--|---|------|------------------------|------|
| V _{CC} | Supply Voltage | | -0.3 | 6.0 | V |
| V _{I/O} | Analog Input/Output Pins Maximum Voltage | | -0.3 | V _{CC} + 0.3* | V |
| I _{CC(MAX)} | Current Carrying Conductor, T _A = +25°C | | | 70 | A |
| V _{SURGE} | Dielectric Surge Strength Test Voltage | IEC 61000-4-5 : Tested ±5 Pulses at 2/60 seconds, 1.2 μs (rise) and 50 μs (width) | 6.0 | | kV |
| I _{SURGE} | Surge Strength Test Current | Tested ±5 Pulses at 3/60 seconds, 8.0 μs (rise) and 20 μs (width) | 3.0 | | kA |
| ESD | Electrostatic Discharge Protection Level | Human Body Model (HBM) per JESD22-A114 | ±2.0 | | kV |
| | | Charged Device Model (CDM) per JESD22-C101 | ±0.5 | | |
| T _J | Junction Temperature | | -40 | +150 | °C |
| T _{STG} | Storage Temperature | | -65 | +155 | °C |
| T _L | Lead Soldering Temperature, 10 Seconds | | | +260 | °C |

*The lower of V_{CC} + 0.3 V or 6.0 V.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual operation of the CT433. Recommended operating conditions are specified to ensure optimal performance to the specifications. Crocus Technology does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol | Parameter | | Min. | Typ. | Max. | Unit |
|------------------|-------------------------------|---------------------|------|------|-----------------|------|
| V _{CC} | Supply Voltage Range | | 3.0 | 3.3 | 3.6 | V |
| V _{OUT} | OUT Voltage Range | | 0 | | V _{CC} | V |
| I _{OUT} | OUT Current | | | | ±1.0 | mA |
| T _A | Operating Ambient Temperature | Extended Industrial | -40 | +25 | +125 | °C |
| | | Automotive | -40 | +25 | +125 | |

Isolation Ratings

| Symbol | Parameter | Conditions | Rating | Unit |
|-----------------------|--|---|------------|-------------------|
| V _{ISO} | Rated Isolation Voltage | Agency Tested per IEC 62368* for 60 seconds. Production Tested at V _{ISO} for 1 second per IEC 62368. | 5.0 | kV _{RMS} |
| | | Agency Tested per UL1577 for 60 seconds. Production Tested at V _{ISO} for 1 second per UL1577. | 5.0 | kV _{RMS} |
| V _{WORK_ISO} | Working Voltage for Basic Isolation | Tested per per IEC 62368* | 1820 | V _{PK} |
| | | | 1287 | V _{RMS} |
| V _{WORK_RI} | Working Voltage for Reinforced Isolation | Tested per IEC 62368* | 915 | V _{PK} |
| | | | 647 | V _{RMS} |
| d _{CR} | Creepage Distance | Minimum Distance Along Package Body from IP Pins to I/O Pins | 9.21 | mm |
| d _{CL} | Clearance Distance | Minimum Distance Through Air from IP Pins to I/O Pins | 8.79 | mm |
| d _{ISO} | Distance Through Isolation | Minimum Internal Distance Through Isolation | 110 | μm |
| CTI | Comparative Tracking Index | Material Group II | 400 to 599 | V |

*IEC 62368 is the succeeding standard to IEC 60950-1 (Edition 2) for isolation testing specifications and as such it will be compliant to the latter standard.

CMTI Rating

Common Mode Transient Immunity defines how the sensor's output changes under a high dV/dt event.

| Symbol | Parameter | Conditions | Rating | Unit |
|--------|--------------------------------|--|--------|-------|
| CMTI | Common Mode Transient Immunity | The failure criterion is that the output peak is greater than 100mV, and the duration is longer than 1us | 100 | kV/μs |

Thermal Properties

Junction-to-ambient thermal resistance is a function of application and board layout and is determined in accordance to JEDEC standard JESD51 for a four (4) layer 2s2p FR-4 printed circuit board (PCB) with 4 oz. of copper (Cu). Special attention must be paid not to exceed junction temperature T_{J(MAX)} at a given ambient temperature T_A.

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|-----------------------|--|------|------|------|------|
| θ _{JA_SOICW} | Junction-to-Ambient Thermal Resistance, SOICW-16 | | 15 | | °C/W |
| θ _{JC_SOICW} | Junction-to-Case Thermal Resistance, SOICW-16 | | 10 | | °C/W |

Electrical Specifications

General Parameters

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|----------------------------|---|--|-----------------|-----------------|------|---------------|
| Power Supplies | | | | | | |
| I_{CC} | Supply Current | $f_{BW} = 1\text{ MHz}$ No load, $I_P = 0\text{ A}$ | | 6.0 | 9.0 | mA |
| I_{OUT} | OUT Maximum Drive Capability ⁽¹⁾ | OUT covers 10% to 90% of V_{CC} span. | -1.0 | | +1.0 | mA |
| C_{L_OUT} | OUT Capacitive Load ⁽¹⁾ | | | | 100 | pF |
| R_{L_OUT} | OUT Resistive Load ⁽¹⁾ | | | 100 | | k Ω |
| R_{IP} | Primary Conductor Resistance ⁽¹⁾ | | | 0.5 | | m Ω |
| PSRR | Power Supply Rejection Ratio ⁽¹⁾ | | | 35 | | dB |
| SPSRR | Sensitivity Power Supply Rejection Ratio ⁽¹⁾ | | | 35 | | dB |
| OPSRR | Offset Power Supply Rejection Ratio ⁽¹⁾ | | | 40 | | dB |
| Analog Output (OUT) | | | | | | |
| V_{OUT} | OUT Voltage Linear Range | $V_{SIG_AC} = \pm 2.00\text{ V}$ $V_{SIG_DC} = +4.00\text{ V}$ | 0.65 | | 2.65 | V |
| V_{OUT_SAT} | Output High Saturation Voltage | V_{OUT} , $T_A = +25^\circ\text{C}$, | $V_{CC} - 0.30$ | $V_{CC} - 0.25$ | | V |
| CMFRR | Common Mode Field Rejection Ratio ⁽¹⁾ | | | -54 | | dB |
| | | | | 0.5 | | mA/G |
| Timings | | | | | | |
| t_{ON} | Power-On Time ⁽¹⁾ | $V_{CC} \geq 2.50\text{ V}$ | | 100 | 200 | μs |
| t_{RISE} | Rise Time ⁽¹⁾ | $I_P = I_{RANGE(MAX)}$, $T_A = +25^\circ\text{C}$, $C_L = 100\text{ pF}$ | | 200 | | ns |
| $t_{RESPONSE}$ | Response Time ⁽¹⁾ | | | 300 | | ns |
| t_{DELAY} | Propagation Delay ⁽¹⁾ | | | 250 | | ns |
| Protection | | | | | | |
| V_{UVLO} | Under-Voltage Lockout | Rising V_{CC} | | 2.50 | | V |
| | | Falling V_{CC} | | 2.45 | | V |
| V_{UV_HYS} | UVLO Hysteresis | | | 50 | | mV |

(1) Guaranteed by design and/or characterization; not tested in production.

Electrical Characteristics

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

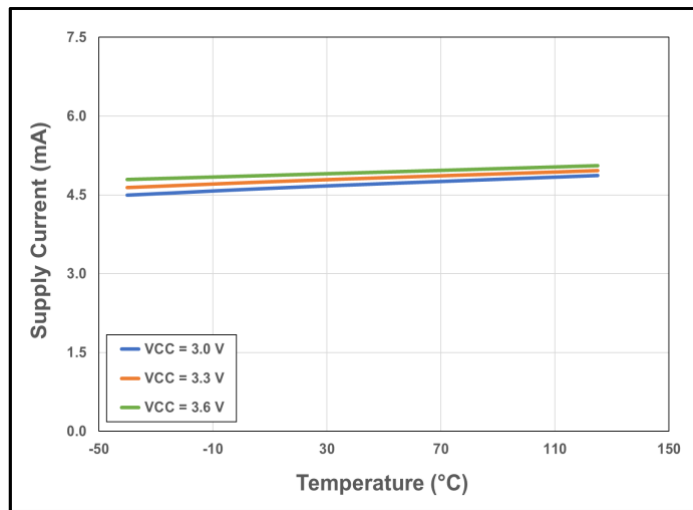


Figure 3. CT433 Supply Current vs. Temperature vs. Supply Voltage

Electrical Characteristics (continued)

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

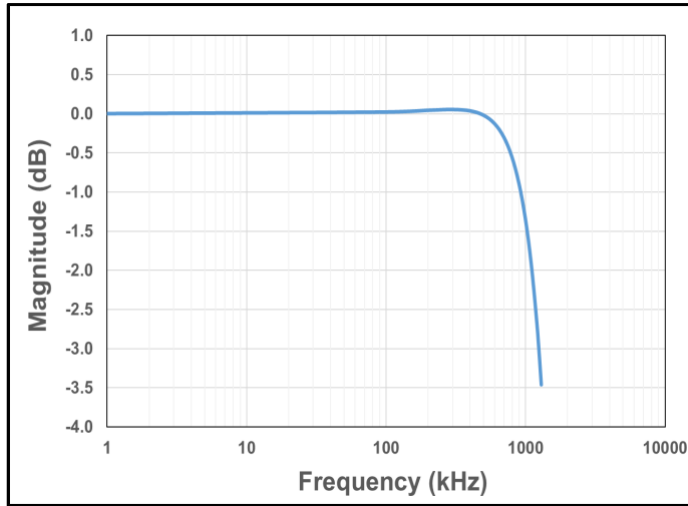


Figure 4. CT433 Bandwidth

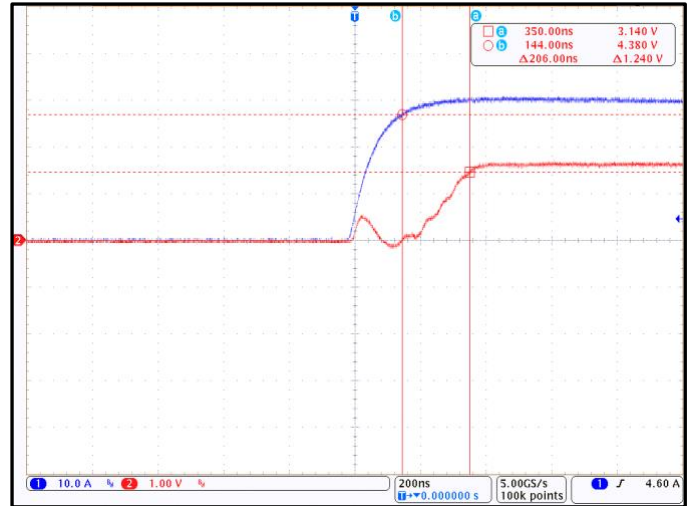


Figure 5. CT433 Response Time; $I_P = 30\text{ A}_{PK}$ and $C_L = 100\text{ pF}$ (Blue = I_{CC} , Red = V_{OUT})

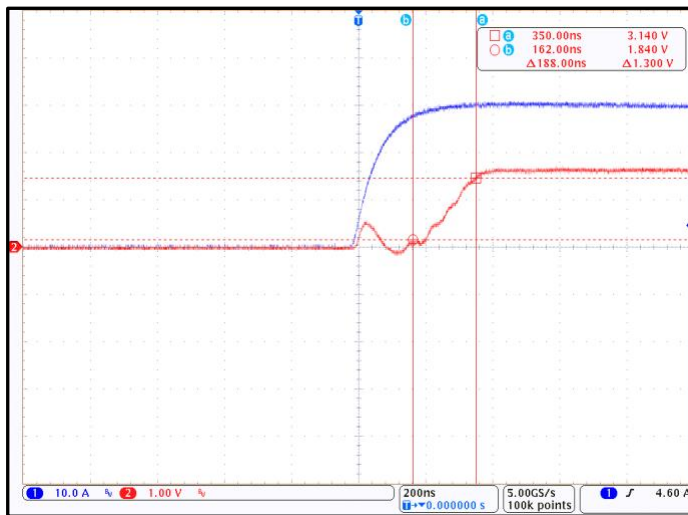


Figure 6. CT433 Rise Time; $I_P = 30\text{ A}_{PK}$ and $C_L = 100\text{ pF}$ (Blue = I_{CC} , Red = V_{OUT})

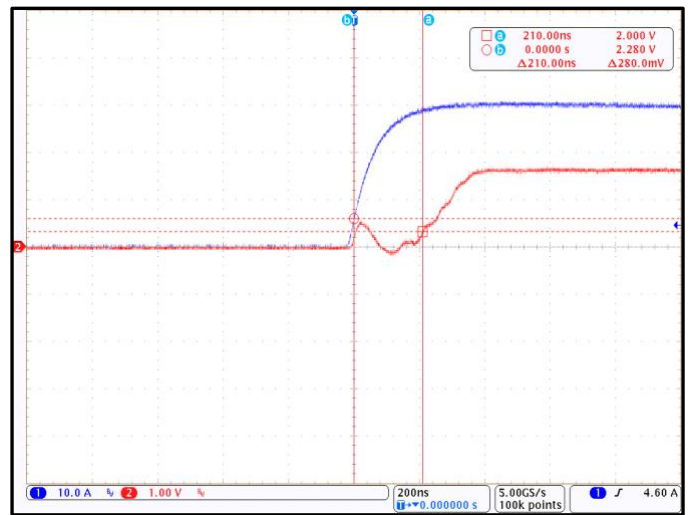


Figure 7. CT433 Propagation Delay; $I_P = 30\text{ A}_{PK}$ and $C_L = 100\text{ pF}$ (Blue = I_{CC} , Red = V_{OUT})

CT433-xSWF20DR: 0 A to +20 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-------|-------|-------------------|
| I_{RANGE} | Current Range | | 0 | | +20 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 0.645 | 0.650 | 0.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 100 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 9.5 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ±0.7 | ±1.0 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.1 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.6 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±6.0 | | mV |
| | | | | ±0.3 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ±1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT433-xSWF20DR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

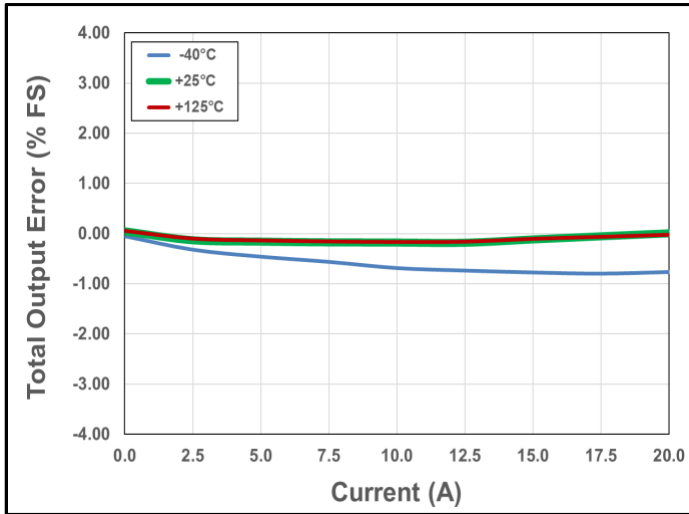


Figure 8. Total Output Error vs. Current vs. Temperature

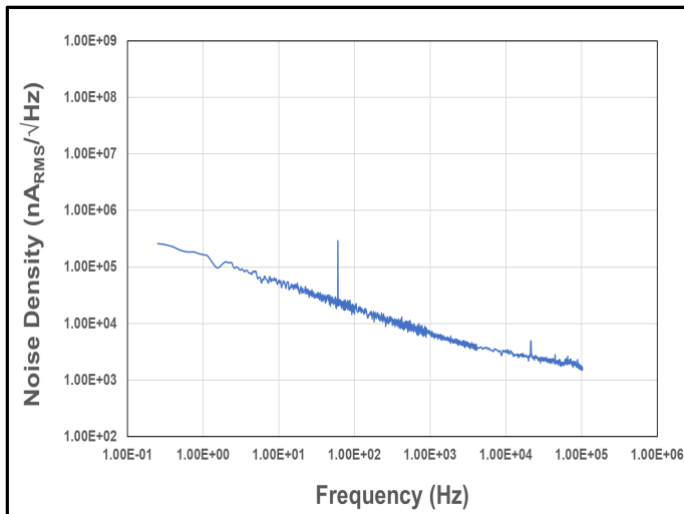


Figure 9. Noise Density vs. Frequency

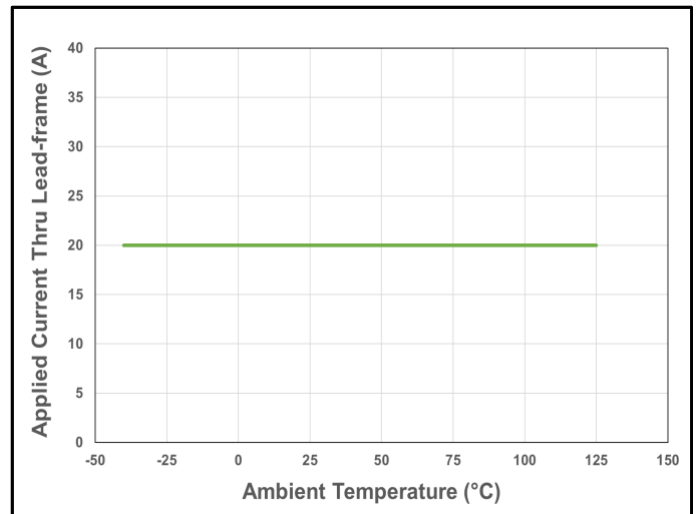


Figure 10. CT433 Current De-rating Curve for 20 A_{DC}

CT433-xSWF20MR: -20 A to +20 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-------|-------|-------------------|
| I_{RANGE} | Current Range | | -20 | | +20 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 1.645 | 1.650 | 1.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 50 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 11.0 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error ⁽²⁾ | $I_P = I_{\text{P(MAX)}}$ | | ±0.5 | ±1.0 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.1 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.4 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±8.3 | | mV |
| | | | | ±0.4 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ±1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

(2) The EOUT (Total Output Error) is not a linear sum of the component errors.

Electrical Characteristics for CT433-xSWF20MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

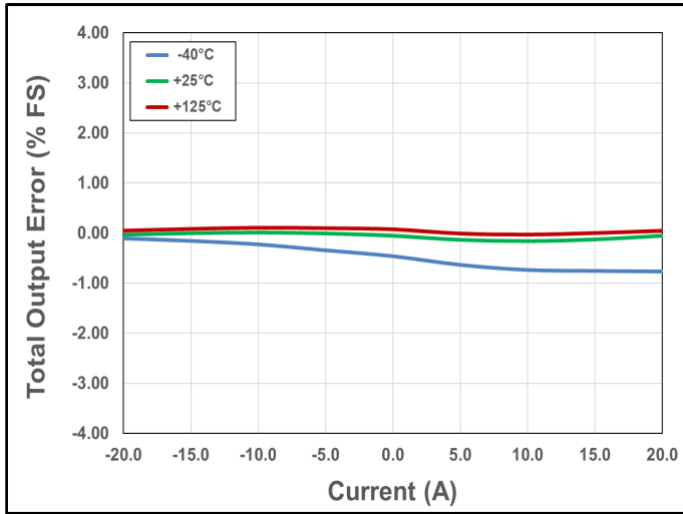


Figure 11. Total Output Error vs. Current vs. Temperature

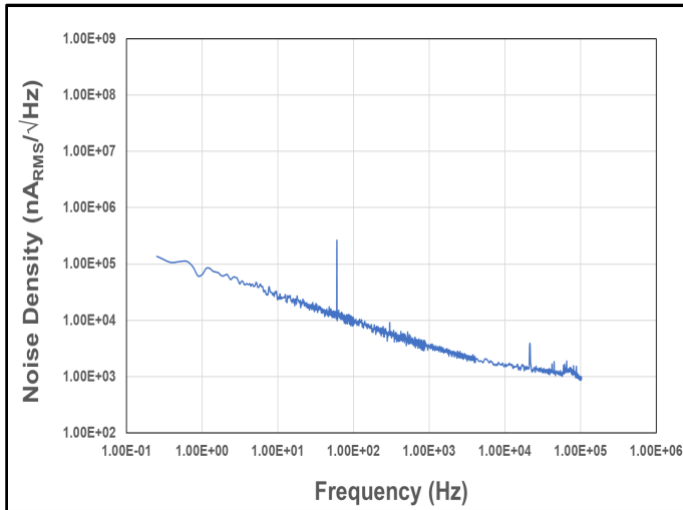


Figure 12. Noise Density vs. Frequency

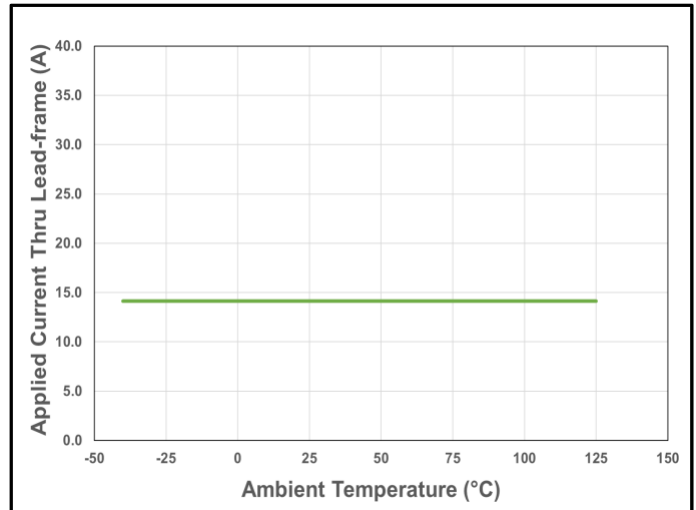


Figure 13. CT433 Current De-rating Curve for 20 A_{PK} (14.1 A_{RMS})

CT433-xSWF30DR: 0 A to +30 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|---|--|-------|-----------|-----------|-------------------|
| I_{RANGE} | Current Range | | 0 | | +30 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 0.645 | 0.650 | 0.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 66.7 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 10.0 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ± 0.7 | ± 1.0 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.1 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.6 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 8.9 | | mV |
| | | | | ± 0.4 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ± 1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT433-xSWF30DR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

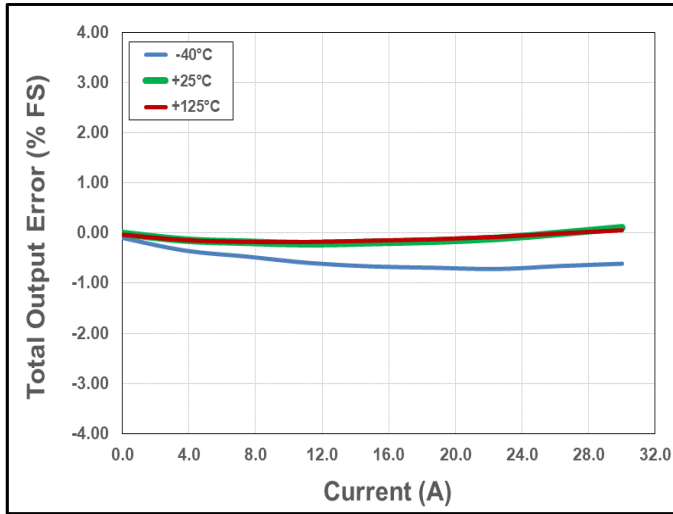


Figure 14. Total Output Error vs. Current vs. Temperature

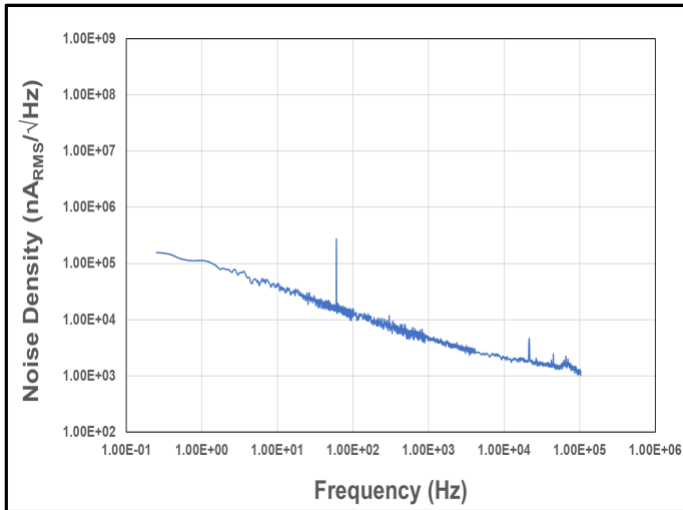


Figure 15. Noise Density vs. Frequency

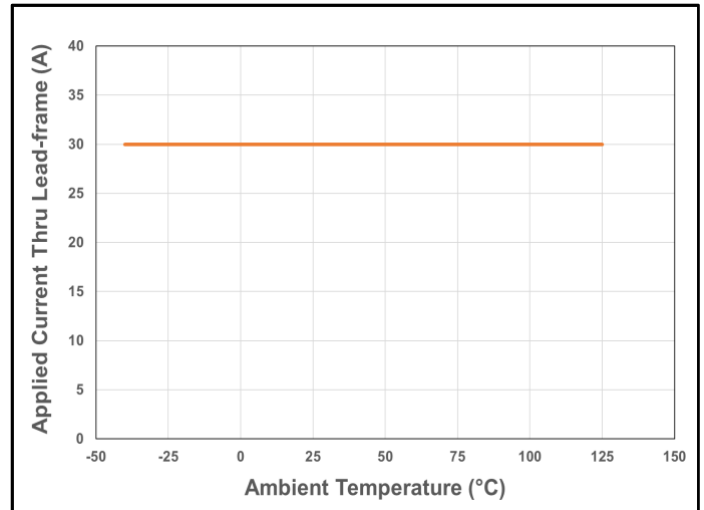


Figure 16. CT433 Current De-rating Curve for 30 A_{DC}

CT433-xSWF30MR: -30 A to +30 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-------|-------|-------------------|
| I_{RANGE} | Current Range | | -30 | | +30 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 1.645 | 1.650 | 1.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 33.3 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 12.5 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ±0.5 | ±1.0 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.1 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.6 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±5.0 | | mV |
| | | | | ±0.2 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ±1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT433-xSWF30MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

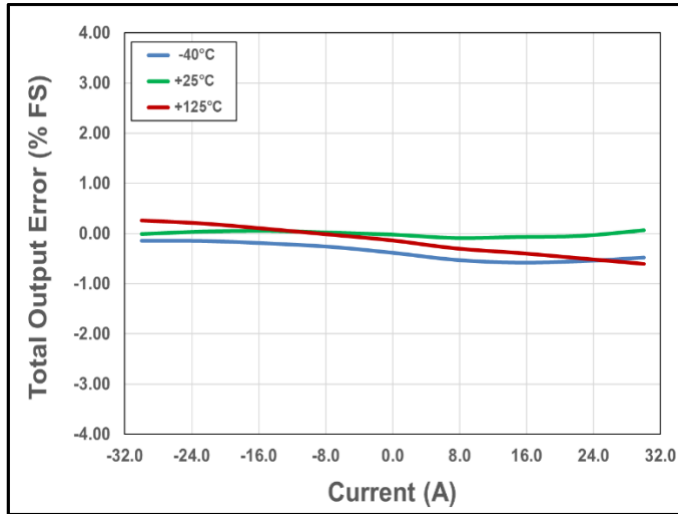


Figure 17. Total Output Error vs. Current vs. Temperature

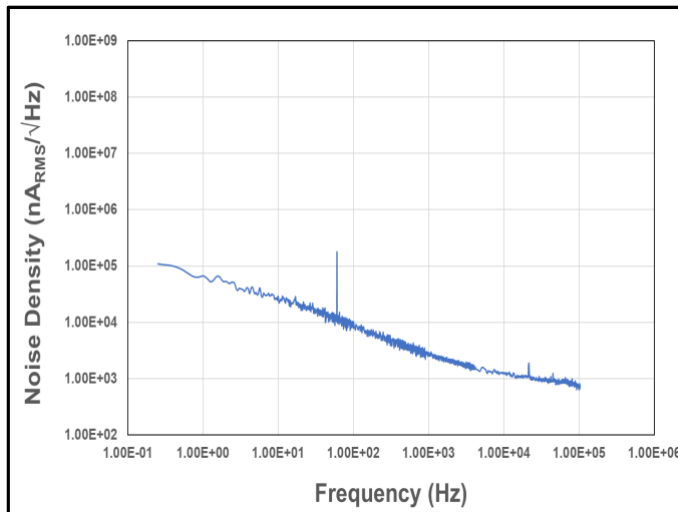


Figure 18. Noise Density vs. Frequency

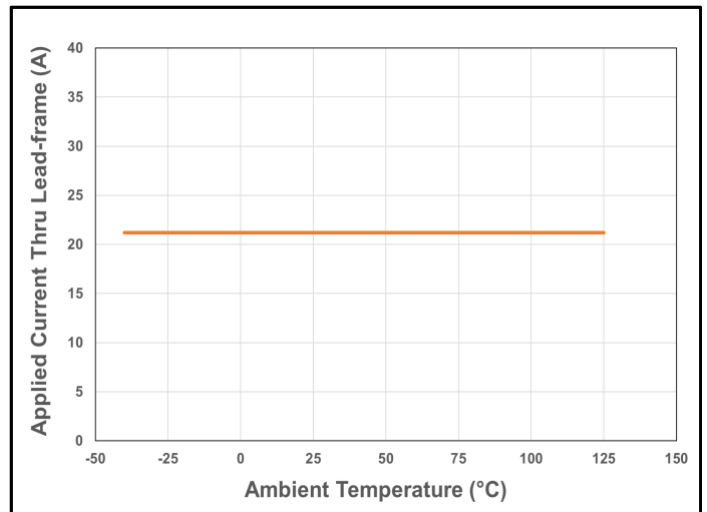


Figure 19. CT433 Current De-rating Curve for 30 A_{PK} (21.2 A_{RMS})

CT433-xSWF40MR: -40 A to +40 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-------|-------|-------------------|
| I_{RANGE} | Current Range | | -40 | | +40 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 1.645 | 1.650 | 1.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 25 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 19.0 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ±0.5 | ±1.0 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.1 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.5 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±6.0 | | mV |
| | | | | ±0.3 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ±1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

CT433-xSWF50DR: 0 A to +50 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-----------|-----------|-------------------|
| I_{RANGE} | Current Range | | 0 | | +50 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 0.645 | 0.650 | 0.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 40 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 11.0 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ± 1.0 | ± 1.5 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.2 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.7 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 8.8 | | mV |
| | | | | ± 0.4 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ± 1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT433-xSWF50DR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

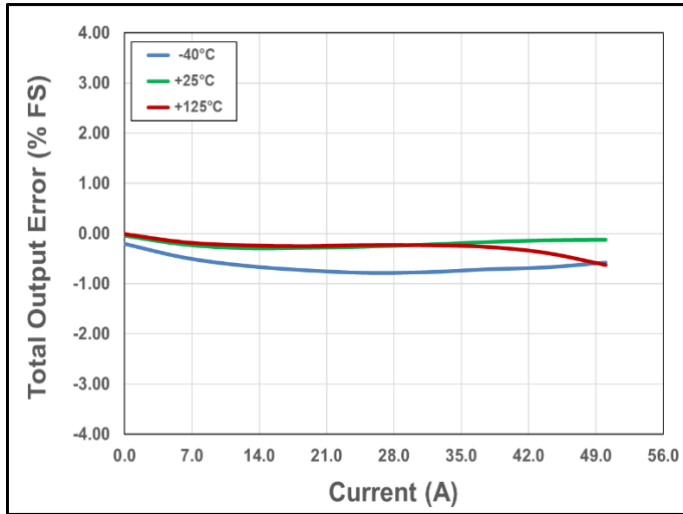


Figure 20. Total Output Error vs. Current vs. Temperature

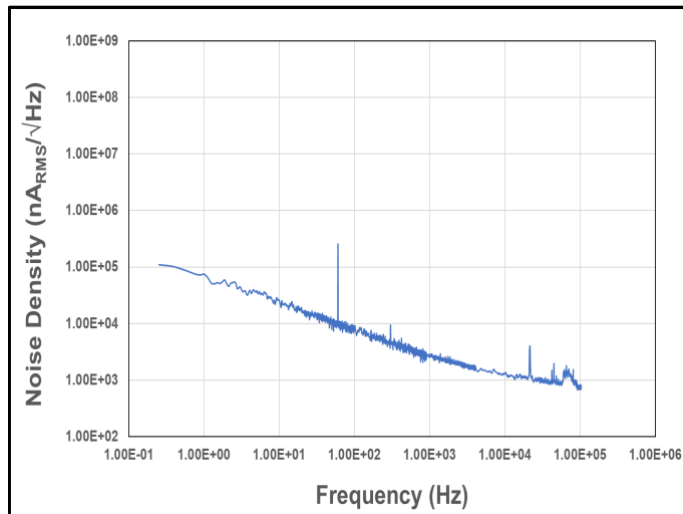


Figure 21. Noise Density vs. Frequency

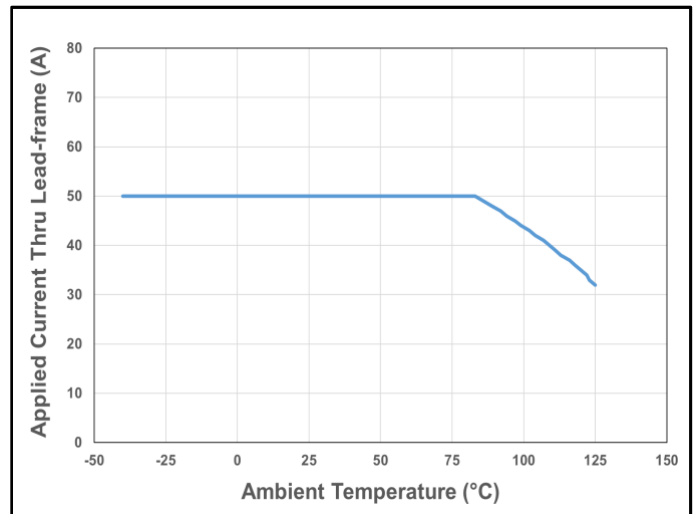


Figure 22. CT433 Current De-rating Curve for 50 A_{DC}

CT433-xSWF50MR: -50 A to +50 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-----------|-----------|-------------------|
| I_{RANGE} | Current Range | | -50 | | +50 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 1.645 | 1.650 | 1.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 20 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 19.0 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ± 0.5 | ± 1.0 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.1 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.5 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 6.0 | | mV |
| | | | | ± 0.3 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ± 1.0 | | % FS |

(2) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT433-xSWF50MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

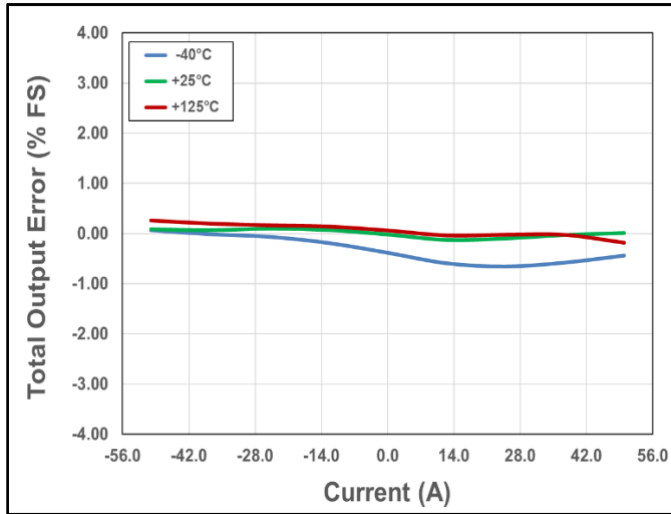


Figure 23. Total Output Error vs. Current vs. Temperature

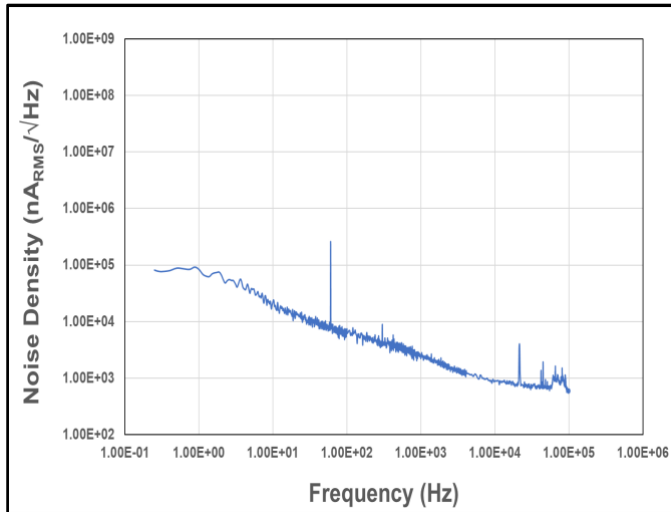


Figure 24. Noise Density vs. Frequency

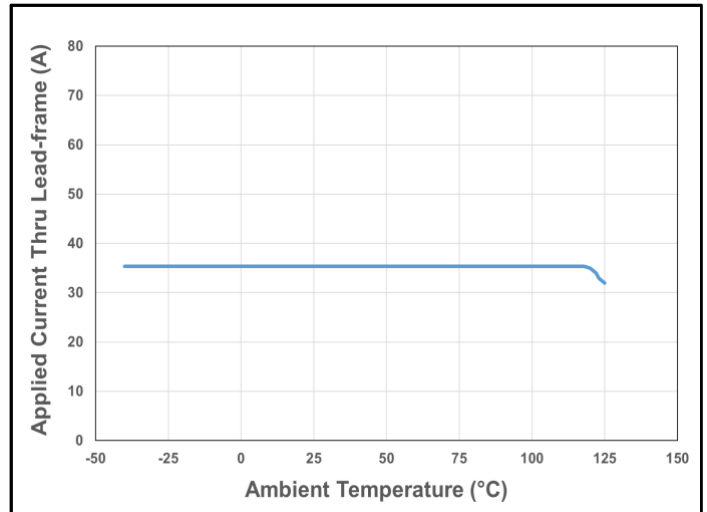


Figure 25. CT433 Current De-rating Curve for 50 A_{PK} (35.5 A_{RMS})

CT433-xSWF65DR: 0 A to +65 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-------|-------|-------------------|
| I_{RANGE} | Current Range | | 0 | | +65 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 0.645 | 0.650 | 0.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 30.8 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 11.5 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ±1.0 | ±1.5 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.2 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±0.3 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ±2.0 | | mV |
| | | | | ±0.1 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ±1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT433-xSWF65DR

$V_{CC} = 5.00\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

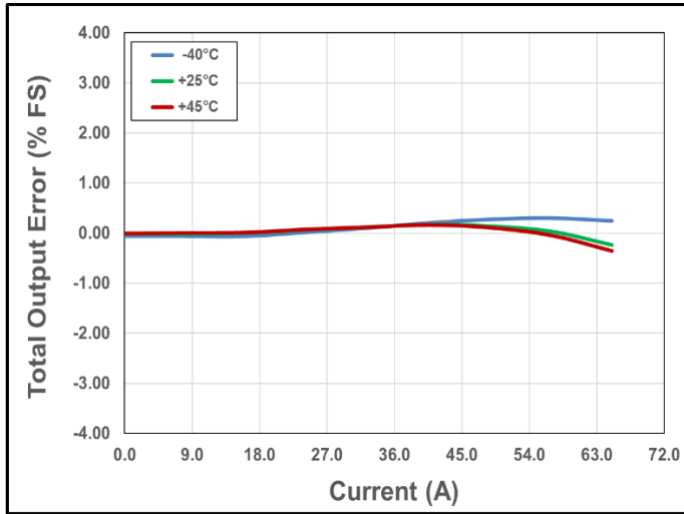


Figure 26. Total Output Error vs. Current vs. Temperature

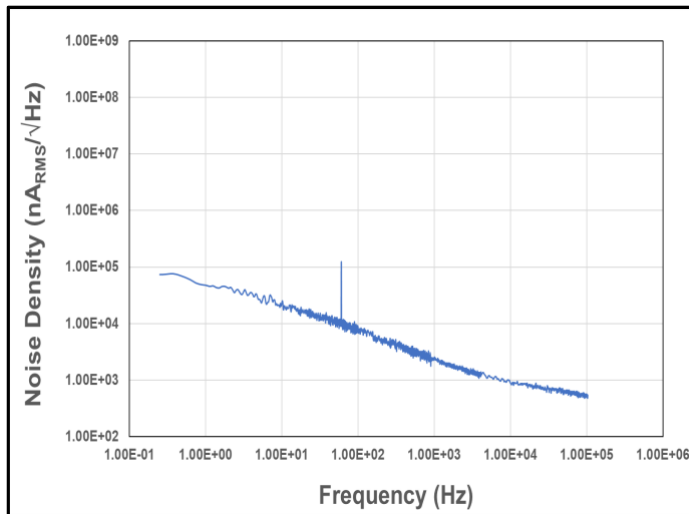


Figure 27. Noise Density vs. Frequency

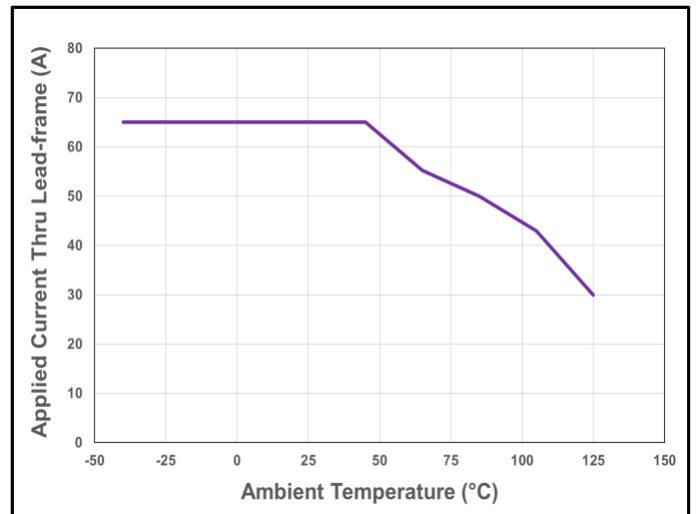


Figure 28. CT433 Current De-rating Curve for 65 A_{DC}

CT433-xSWF65MR: -65 A to +65 A

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--|--|-------|-----------|-----------|-------------------|
| I_{RANGE} | Current Range | | -65 | | +65 | A |
| V_{OQ} | Voltage Output Quiescent | $T_A = +25^\circ\text{C}$, $I_P = 0\text{ A}$ | 1.645 | 1.650 | 1.655 | V |
| S | Sensitivity | $I_{\text{RANGE(MIN)}} \leq I_P \leq I_{\text{RANGE(MAX)}}$ | | 15.4 | | mV/A |
| f_{BW} | Bandwidth ⁽¹⁾ | Small Signal = -3 dB | | 1.0 | | MHz |
| e_{N} | Noise ⁽¹⁾ | $T_A = +25^\circ\text{C}$, $f_{\text{BW}} = 100\text{ kHz}$ | | 19.0 | | mA _{RMS} |
| OUT Accuracy Performance | | | | | | |
| E_{OUT} | Total Output Error | $I_P = I_{\text{P(MAX)}}$ | | ± 0.5 | ± 1.0 | % FS |
| E_{LIN} | Non-Linearity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.2 | | % FS |
| E_{SENS} | Sensitivity Error ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 0.2 | | % FS |
| V_{OFFSET} | Offset Voltage ⁽¹⁾ | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | ± 3.0 | | mV |
| | | | | ± 0.1 | | % FS |
| Lifetime Drift | | | | | | |
| $E_{\text{TOT_DRIFT}}$ | Total Output Error Lifetime Drift ⁽¹⁾ | $I_P = I_{\text{P(MAX)}}$ | | ± 1.0 | | % FS |

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT433-xSWF65MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

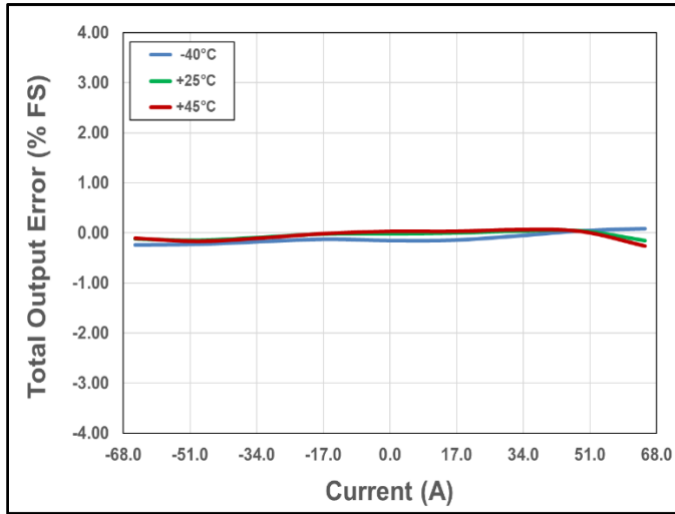


Figure 29. Total Output Error vs. Current vs. Temperature

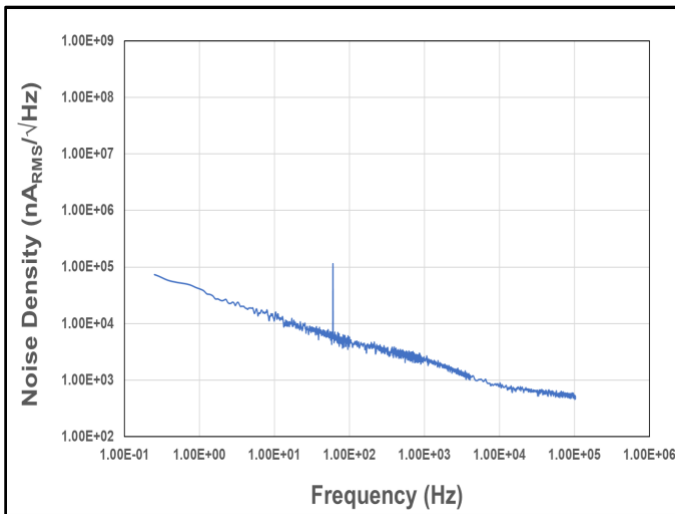


Figure 30. Noise Density vs. Frequency

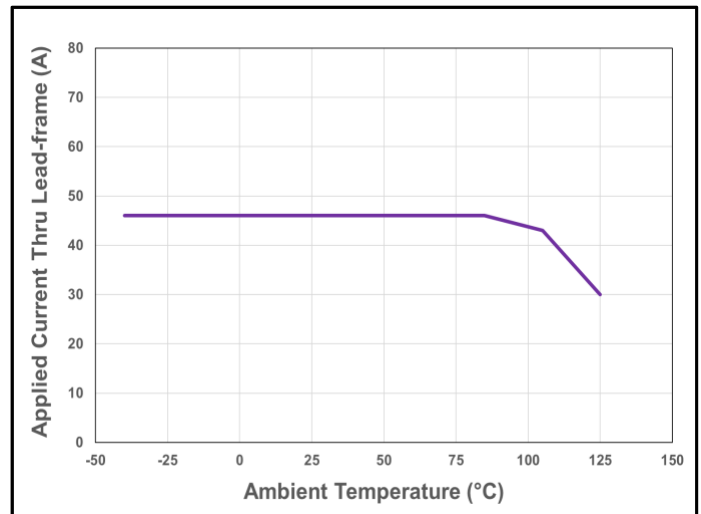


Figure 31. CT433 Current De-rating Curve for 65 A_{PK} (46.0 A_{RMS})

Circuit Description

Overview

The CT433 is a very high accuracy contact current sensor with an integrated current carrying conductor (CCC) that handles up to 65 A. It has very high sensitivity and a wide dynamic range with excellent accuracy (very low total output error) across temperature. This current sensor supports the current ranges below:

- 0 A to +20 A
- -20 A to +20 A
- 0 A to +30 A
- -30 A to +30 A
- -40 A to +40 A
- 0 A to +50 A
- -50 A to +50 A
- 0 A to +65 A
- -65 A to +65 A

When current is flowing through the CCC, the XtremeSense TMR sensors inside the chip senses the field which in turn generates differential voltage signals that then goes through the Analog Front-End (AFE) to output a current measurement with less than ±1.0% Full-Scale (FS) total output error (E_{OUT}).

The chip is designed to enable a very fast response time of 300 ns for the current measurement from the OUT pin as the bandwidth for the CT433 is 1.0 MHz. Even with a high bandwidth, it consumes a minimal amount of power.

Linear Output Current Measurement

The CT433 provides a continuous linear analog output voltage which represents the current measurement. The output voltage range of OUT is from 0.65 V to 2.65 V with a V_{OQ} of 0.65 V and 1.65 V for unidirectional and bidirectional currents, respectively. Figure 32 illustrates the output voltage range of the OUT pin as a function of the measured current.

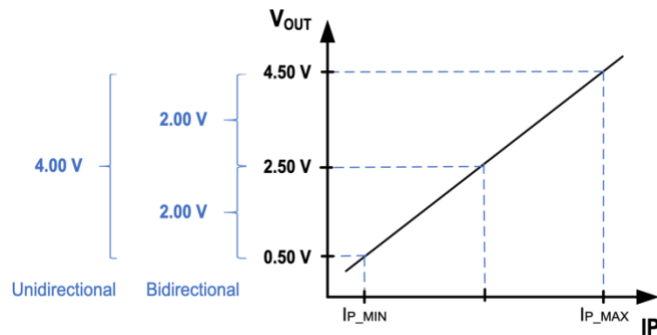


Figure 32. Linear Output Voltage Range (OUT) vs. Measured Current (IP)

Total Output Error

The Total Output Error is the difference between the current measured by CT433 and the actual current, relative to the actual current. It is equivalent to the ratio between the difference of the ideal and actual voltage to the ideal sensitivity multiplied by the current flowing through the primary conductor (CCC). The following equation defines the Total Output Error (E_{OUT}) for the CT433:

$$E_{OUT} = 100 * \frac{V_{IOUT_IDEAL}(I_P) - V_{IOUT}(I_P)}{S_{IDEAL}(I_P) \times I_P}$$

The E_{OUT} incorporates all sources of error and is a function of the sensed current (I_P) from CT433. At high current levels, the E_{OUT} will be dominated by the sensitivity error whereas at low current, the dominant characteristic is the offset voltage. Figure 33 shows the behavior of E_{OUT} versus I_P. When I_P goes to 0 from both directions, the curves exhibit asymptotic behavior (i.e., E_{OUT} approaches infinity).

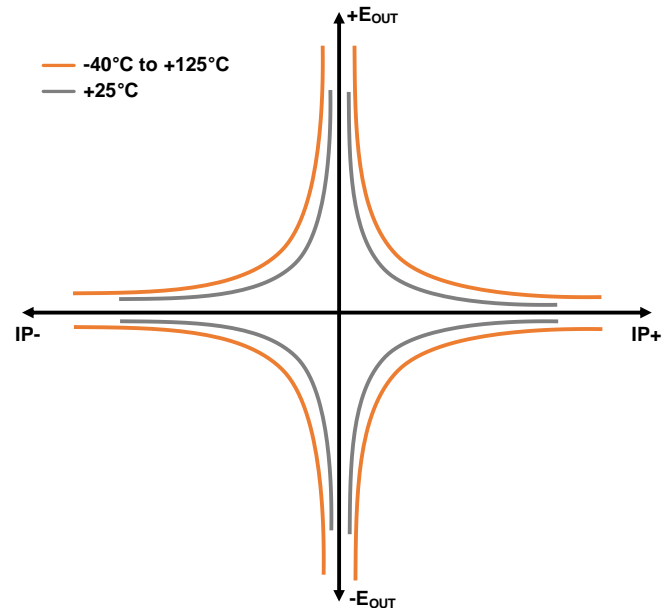


Figure 33. Total Output Error (E_{OUT}) vs. Sensed Current (I_P)

The CT433 achieves a total output error (E_{OUT}) that is less than ±1.0% of Full-Scale (FS) over supply voltage and temperature. It is designed with innovative and proprietary TMR sensors and circuit blocks to provide very accurate current measurements regardless of the operating conditions.

Sensitivity Error

The sensitivity error (E_{SENS}) is the sensitivity temperature drift error for unipolar or DC current. It is calculated using the equation below:

$$E_{SENS} = \left(\frac{S_{MEASURED}}{S} - 1 \right) \times 100$$

Power-On Time (t_{ON})

The Power-On Time (t_{ON}) of 100 μ s is the amount of time required by CT433 to start up, fully power the chip and becoming fully operational from the moment the supply voltage is greater than the UVLO voltage. This time includes the ramp up time and the settling time (within 10% of steady-state voltage) after the power supply has reached the minimum V_{CC} .

Response Time ($t_{RESPONSE}$)

The Response Time ($t_{RESPONSE}$) of 300 ns for the CT433 is the time interval between the following terms:

1. When the primary current signal reaches 90% of its final value,
2. When the chip reaches 90% of its output corresponding to the applied current.

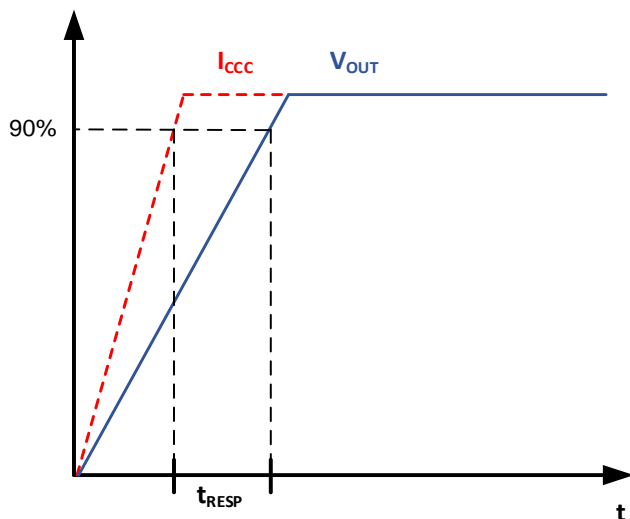


Figure 34. CT433 Response Time Curve

Rise Time (t_{RISE})

The CT433's rise time, t_{RISE} , is the time interval of when its output reaches 10% and 90% of the full-scale output voltage. The t_{RISE} of the CT433 is 200 ns.

Propagation Delay (t_{DELAY})

The Propagation Delay (t_{DELAY}) is the time difference between these two events:

1. When the primary current reaches 20% of its final value
2. When the chip reaches 20% of its output corresponding to the applied current.

The CT433 has a propagation delay of 250 ns.

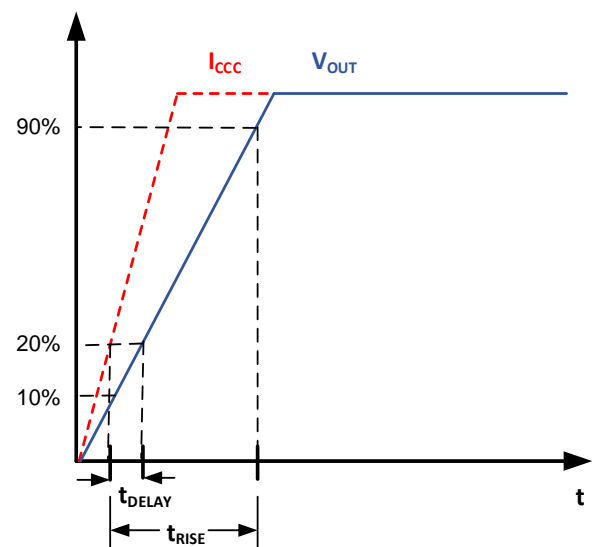


Figure 35. CT433 Propagation Delay and Rise Time Curve

Under-Voltage Lockout (UVLO)

The Under-Voltage Lock-out protection circuitry of the CT433 is activated when the supply voltage (V_{CC}) falls below 2.45 V. The CT433 remains in a low quiescent state until V_{CC} rises above the UVLO threshold (2.50 V). In this condition where the V_{CC} is less than 2.45 V and UVLO is triggered, the output from the CT433 is not valid. Once the V_{CC} rises above 2.50 V then the UVLO is cleared.

Immunity to Common Mode Fields

The CT433 is housed in custom plastic package that utilizes a “U-shaped” lead-frame to reduce the common mode fields generated by external stray magnetic fields. With the “U-shaped” lead-frame, the stray fields cancel one another thus reducing electro-magnetic interference (EMI). The CT433 is able to achieve -54 dB of Common Mode Rejection Ratio (CMFRR).

Also, good PCB layout of the CT433 will optimize performance and reduce EMI. Please see the Applications Information section in this data sheet for recommendations on PCB layout.

Creepage and Clearance

Two important terms as it relates to isolation provided by the package are creepage and clearance. Creepage is defined as the shortest distance across the surface of the package from one side of the leads to the other side of the leads. The definition for clearance is the shortest distance between the leads of the opposite side through the air. Figure 36 illustrates the creepage and clearance for the SOICW-16 package of the CT433.

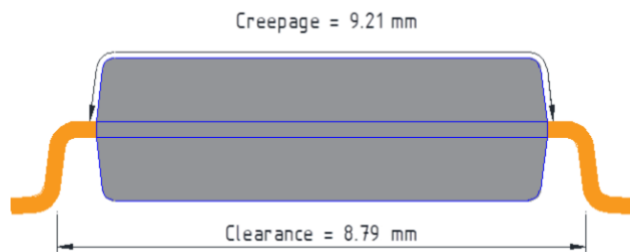


Figure 36. The Creepage and Clearance for the CT433's SOICW-16 package

Applications Information

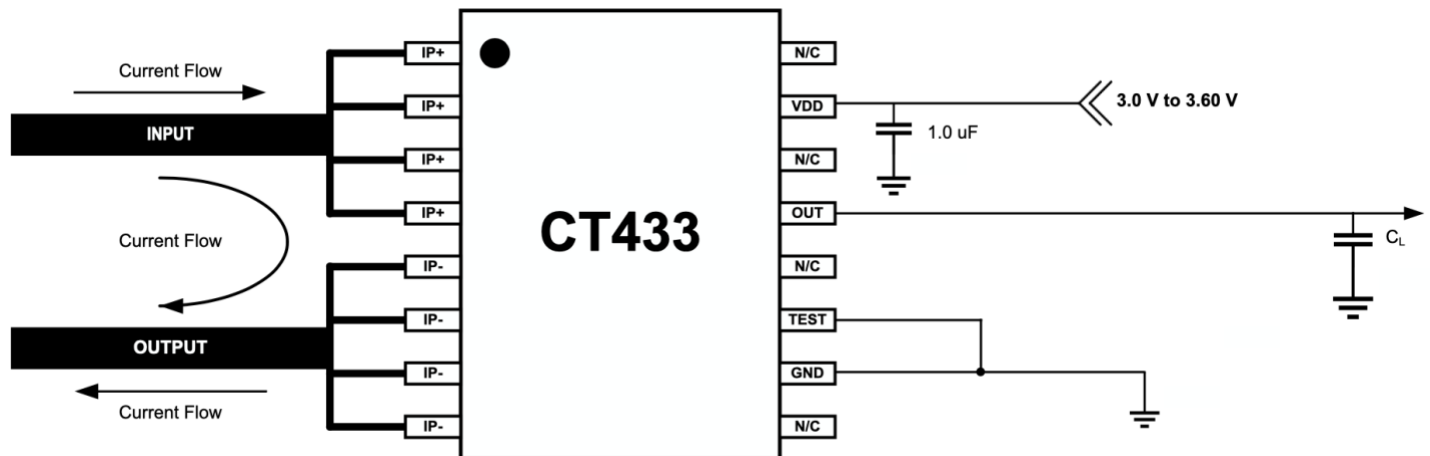


Figure 37. CT433 Application Block Diagram

Application

The CT433 is an integrated contact current sensor that can be used in many applications from measuring current in power supplies to motor control to over-current fault protection. It is a plug-and-play solution in that no calibration is required and it can output to a microcontroller a simple linear analog output voltage which corresponds to a current measurement value. Figure 37 is an application diagram of how CT433 would be implemented in a system.

It is designed to support an operating voltage range of 3.0 V to 3.6 V, but it is ideal to use a 3.3 V power supply where the output tolerance is less than $\pm 5\%$.

Fuse Time vs. Current

Since the CT433 is a contact current sensor, it dissipates heat as current is conducted through its lead-frame.

The CT433's lead-frame has 0.5 m Ω resistance (Typ. Value) which results in very low power dissipation during normal operation.

However, when the current surges above the rated nominal values of the CT433 due to short circuit or transient current spikes for a specific duration of time, the lead-frame will be permanently damaged.

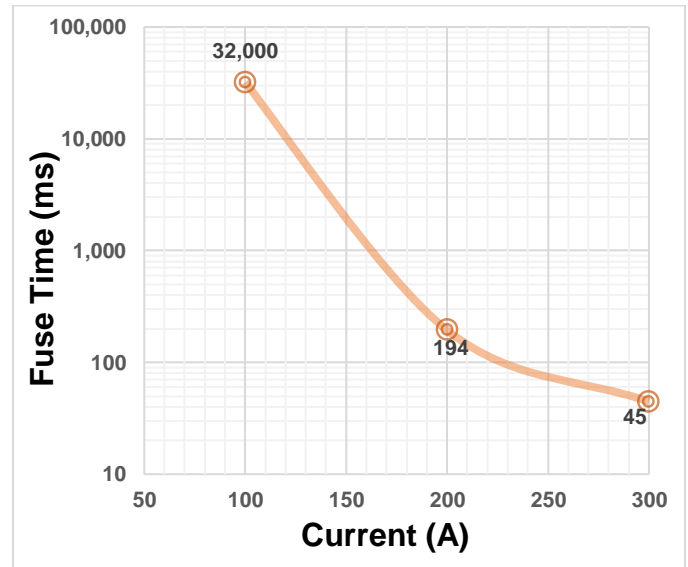


Figure 38. CT433 Fuse Time vs. Current

Figure 38 illustrates the CT433's fuse time for 100 A, 200 A, and 300 A current levels. The CT433 tolerates 100 A for 32 s while, at 200 A and 300 A, the fuse times are 194 ms and 45 ms, respectively.

SOICW-16 Package Drawing and Dimensions

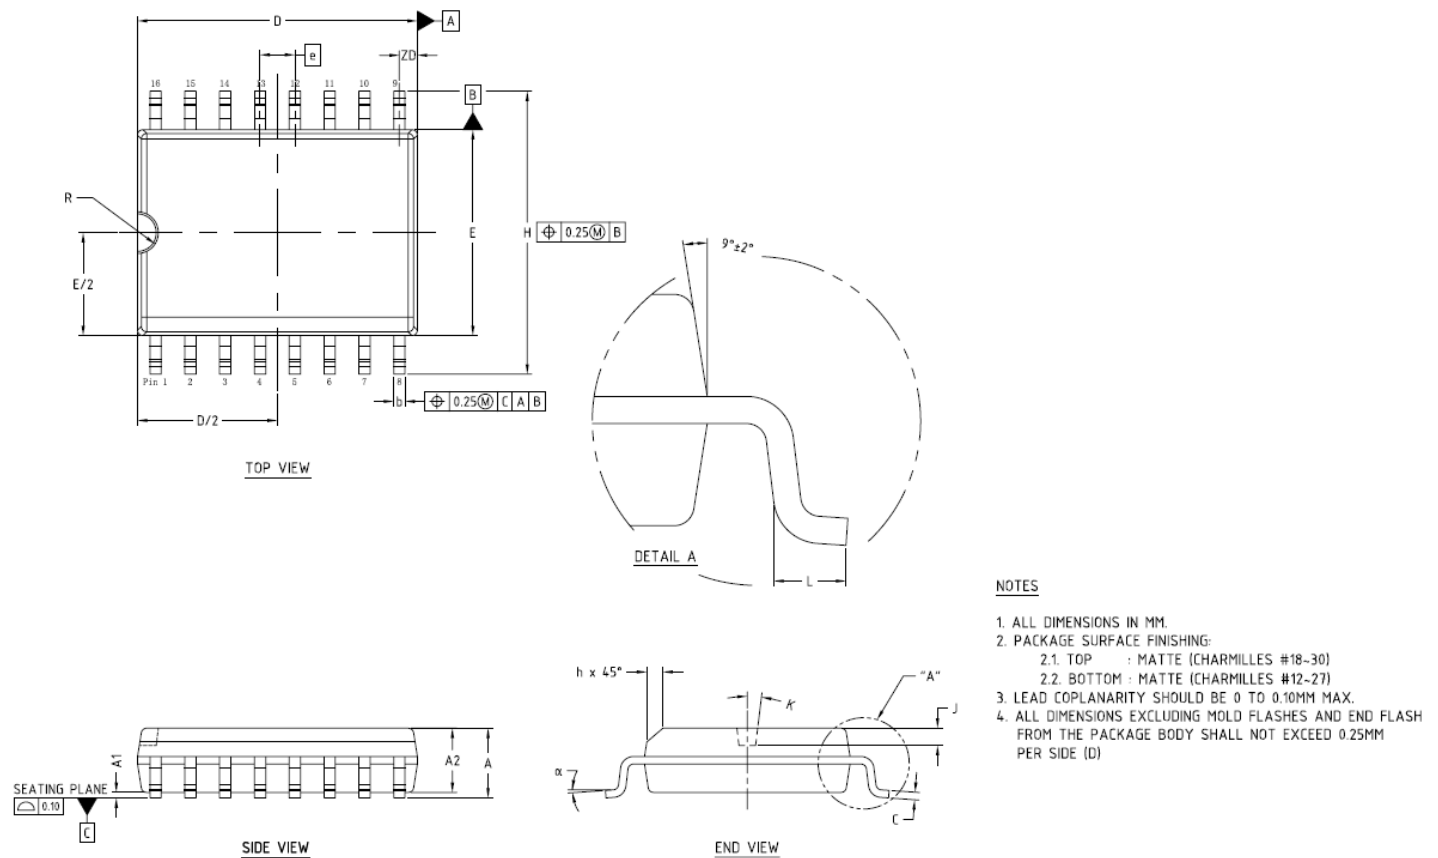



Figure 39. SOICW-16 Package Drawing

Table 1. CT433 SOICW-16 Package Dimensions

| Symbol | Dimensions in Millimeters (mm) | | |
|--------|--------------------------------|-------|-------|
| | Min. | Typ. | Max. |
| A | 2.44 | 2.54 | 2.64 |
| A1 | 0.10 | 0.20 | 0.30 |
| A2 | 2.24 | 2.34 | 2.44 |
| b | 0.36 | 0.41 | 0.46 |
| C | 0.24 | 0.25 | 0.26 |
| D | 10.11 | 10.21 | 10.31 |
| E | 7.40 | 7.50 | 7.60 |
| e | 1.27 BSC | | |
| H | 10.11 | 10.31 | 10.51 |
| h | 0.31 | 0.51 | 0.71 |
| J | 0.53 | 0.63 | 0.73 |
| K | 7° BSC | | |
| L | 0.51 | 0.76 | 1.01 |
| R | 0.63 | 0.76 | 0.89 |
| ZD | 0.66 REF | | |
| α | 0° | - | 8° |

Crocus Technology provides package drawings as a service to customers considering or planning to use Crocus products in their designs. Drawings may change without notice. Please note the revision and date of the data sheet and contact a Crocus Technology representative to verify or obtain the most recent version. The package specifications do not expand the terms of Crocus Technology's worldwide terms and conditions, specifically the warranty therein, which covers Crocus Technology's products.

SOICW-16 Tape & Pocket Drawing and Dimensions

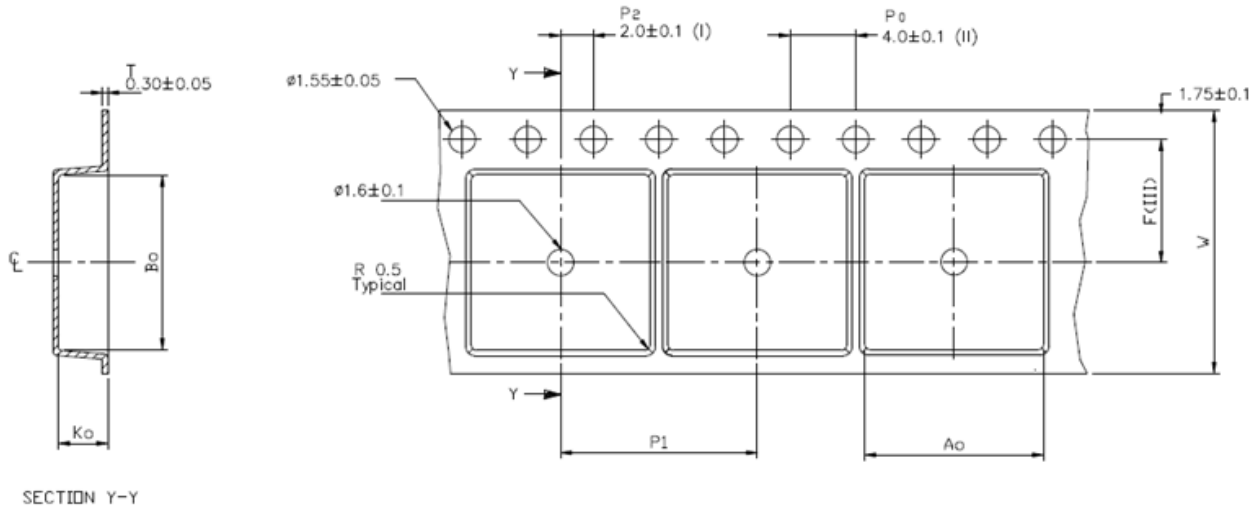

| | |
|----------------|---------------|
| A ₀ | 10.90 +/− 0.1 |
| B ₀ | 10.70 +/− 0.1 |
| K ₀ | 3.00 +/− 0.1 |
| F | 7.50 +/− 0.1 |
| P ₁ | 12.00 +/− 0.1 |
| W | 16.00 +/− 0.3 |

- (I) Measured from centreline of sprocket hole to centreline of pocket.
- (II) Cumulative tolerance of 10 sprocket holes is ± 0.20 .
- (III) Measured from centreline of sprocket hole to centreline of pocket.
- (IV) Other material available.
- (V) Typical SR of form tape Max 10⁸ OHM/SQ

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.

Figure 40. SOICW-16 Package Drawing

CT433 Tape Pocket Orientation

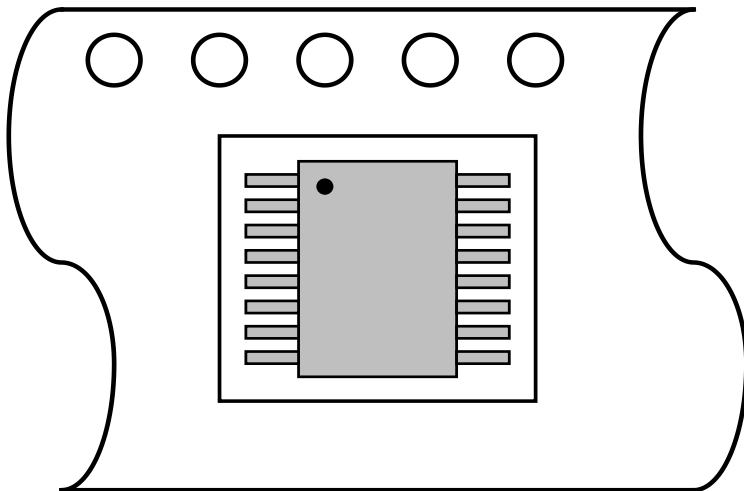


Figure 41. SOICW-16 Orientation in Tape Pocket

Package Information

Table 2. CT433 Package Information

| Part Number | Package Type | # of Leads | Quantity per Reel | Lead Finish | MSL Rating ⁽²⁾ | Operating Temperature ⁽³⁾ | Device Marking ⁽⁴⁾ |
|----------------|--------------|------------|-------------------|-------------|---------------------------|--------------------------------------|-------------------------------|
| CT433-HSWF20DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF20DR YYWWLL |
| CT433-ASWF20DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF20DR YYWWLL |
| CT433-HSWF20MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF20MR YYWWLL |
| CT433-ASWF20MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF20MR YYWWLL |
| CT433-HSWF30DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF30DR YYWWLL |
| CT433-ASWF30DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF30DR YYWWLL |
| CT433-HSWF30MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF30MR YYWWLL |
| CT433-ASWF30MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF30MR YYWWLL |
| CT433-HSWF40MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF40MR YYWWLL |
| CT433-HSWF50DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF50DR YYWWLL |
| CT433-ASWF50DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF50DR YYWWLL |
| CT433-HSWF50MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF50MR YYWWLL |
| CT433-ASWF50MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF50MR YYWWLL |
| CT433-HSWF65DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF65DR YYWWLL |

| Part Number | Package Type | # of Leads | Quantity per Reel | Lead Finish | MSL Rating ⁽²⁾ | Operating Temperature ⁽³⁾ | Device Marking ⁽⁴⁾ |
|----------------|--------------|------------|-------------------|-------------|---------------------------|--------------------------------------|-------------------------------|
| CT433-ASWF65DR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF65DR YYWWLL |
| CT433-HSWF65MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433 SWF65MR YYWWLL |
| CT433-ASWF65MR | SOIC-W | 16 | 1,000 | Sn | 3 | -40°C to +125°C | CT433A SWF65MR YYWWLL |

- (1) RoHS is defined as semiconductor products that are compliant to the current EU RoHS requirements. It also will meet the requirement that RoHS substances do not exceed 0.1% by weight in homogeneous materials. Green is defined as the content of Chlorine (Cl), Bromine (Br) and Antimony Trioxide based flame retardants satisfy JS709B low halogen requirements of $\leq 1,000$ ppm.
- (2) MSL Rating = Moisture Sensitivity Level Rating as defined by JEDEC standard classifications.
- (3) Package will withstand ambient temperature range of -40°C to +125°C and storage temperature range of -65°C to +155°C.
- (4) Device Marking for CT433 is defined as CT433(A) SWFxxZR YYWWLL where the first 2 lines = part number, A is present only for Automotive parts, YY = year, WW = work week and LL = lot code.

Device Marking


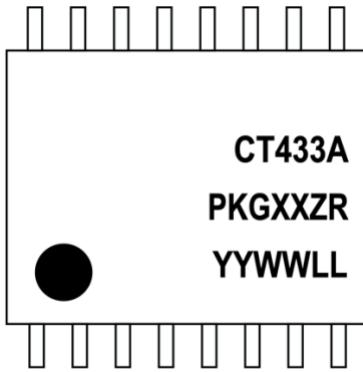


Figure 42. CT433 Device Marking for 16-lead Package

| Row No. | Code | Definition |
|---------|-------|--------------------------------|
| 3 | • | Pin 1 Indicator |
| 1 | CT433 | Crocus Part Number |
| 1 | A | Present only on Automotive PNs |
| 2 | PKG | Package Type |
| 2 | XX | Maximum Current Rating |
| 2 | ZR | Polarity |
| 3 | YY | Calendar Year |
| 3 | WW | Work Week |
| 3 | LL | Lot Code |

Table 3. CT433 Device Marking Definition for 16-lead SOIC-W Package

Part Number Ordering Legend

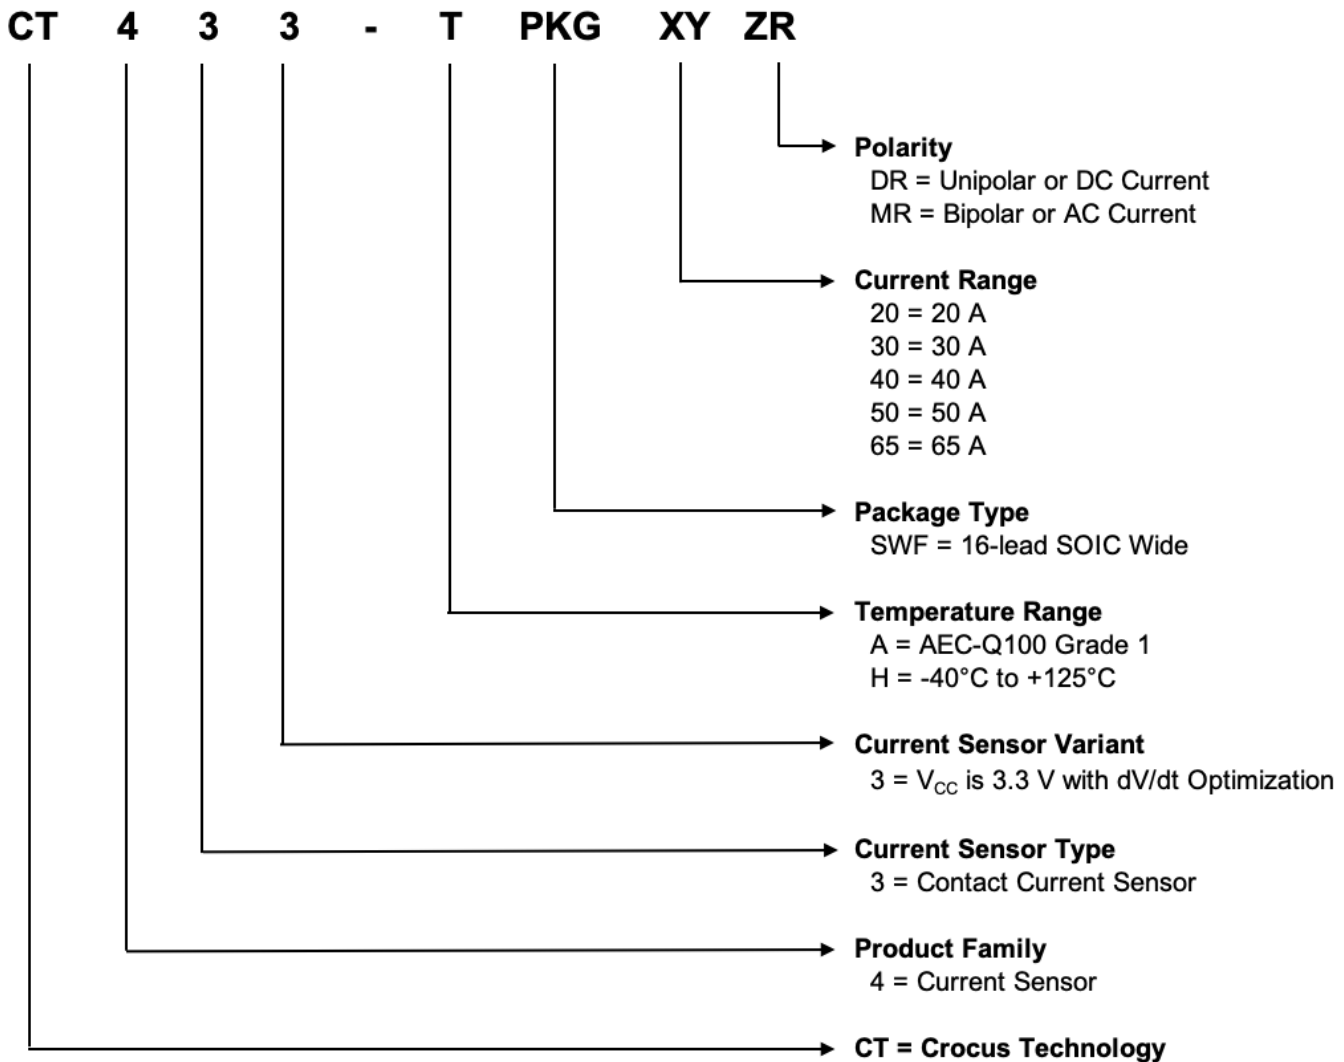

Disclaimer: The contents of this document are provided for informational purposes only. CROCUS TECHNOLOGY, INC. AND CROCUS TECHNOLOGY SA (COLLECTIVELY “CROCUS”) MAKE NO REPRESENTATIONS OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS HEREIN, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Crocus reserves the right to make changes to the specifications and product descriptions, and/or to discontinue or make changes to its products at any time without notice. Crocus’s products have not been designed, tested, or manufactured for use and should not be used in applications where the failure, malfunction or inaccuracy of the Products carries a risk of death or serious bodily injury or damage to tangible property, including, but not limited to, life support systems, nuclear facilities, military, aircraft navigation or communication, emergency systems, harsh environments, or other applications with a similar degree of potential hazard.