


Split core current transformer

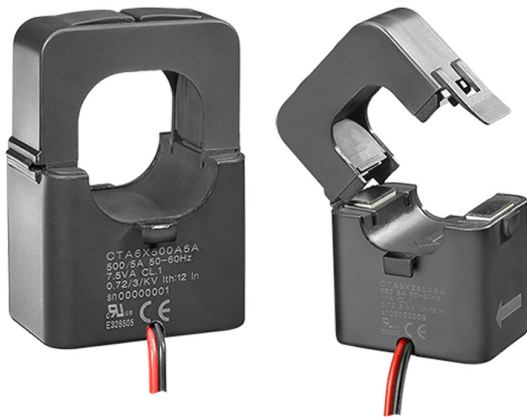

Benefits

- **Adaptability and flexibility.** Effective for a wide range of currents, it can be installed in existent applications.
- **Fast installation.** The opening/closing mechanism makes installation fast even in existent applications. The analyzer only requires two cables to be connected per sensor.

Description

Split core current transformer with compact dimensions, suitable for retrofit applications when used in combination with any energy meter with 5 A currents inputs.
It manages primary current from 100 A to 600 A (depends on the model).

Applications

CTA is the ideal solution for quick and easy installation without disconnecting cables during installation. It is indicated for any application (residential, commercial and industrial), especially for retrofitting where installing a solid core current transformer is not possible.

Main features

- 5 A secondary current
- 24 mm hole diameter for primary current up to 300 A
- 36 mm hole diameter for primary current up to 600 A

Features

General

Material	PA66
Protection degree	IP20
Secondary output	UL R/C cable, 16AWG (1,3mm ²) Length: see Electrical specifications
Mounting	Cable
Weight (g)	CTA 5X: 165 CTA 6X: 275
Cable diameter	CTA 5X: 24 mm CTA 6X: 36 mm

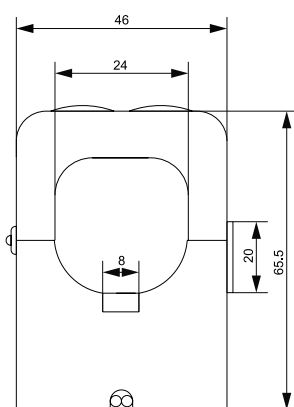


Fig. 1 CTA 5X



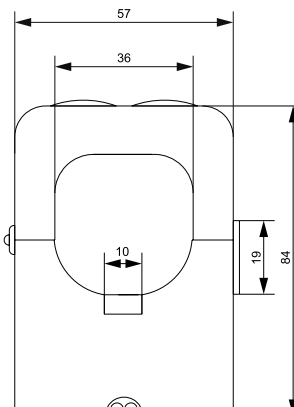


Fig. 2 CTA6X

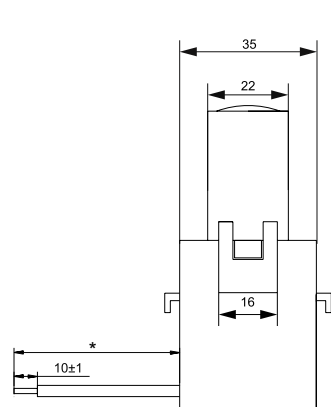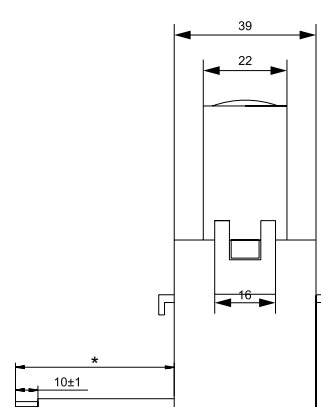

Note: see Electrical specifications

Environmental specifications

Operating temperature	-20° to +65°C (-4 to 149 F°) CTA6X 600A: -20° to +50°C (-4 to 122 F°)
Storage temperature	-25° to +80°C (-13 to 176 F°)

UL note: insulation class: A (105), 55 °C rise type at 30°C ambient

Conformity

Approvals	CE cRU [®] US
Standards	EN 61869-2

Electrical specifications

Rated secondary current	5 A
Frequency	50/60 Hz
Rated system voltage	600 V ac
Rated insulation level	0.72 kV ac, dielectric strength 3 kV ac for 1min
Insulation class	Thermal class B (IEC 60085)
Short time current rating	
I_{th}	12 x I _n
I_{dyn}	2,5 x I _{th}

Model	Primary current	Accuracy (EN61869-2)	Cable lenght	Burden*
CTA 5X	100 A	Class 3	0.5 m	1 VA
	150 A	Class 3	0.5 m	1 VA
	200 A	Class 3	2 m	1 VA
	250 A	Class 1	1 m	1 VA
	300 A	Class 1	0.5 m	2.5 VA
CTA 6X	200 A	Class 3	1 m	1 VA
	300 A	Class 1	1 m	2.5 VA
	400 A	Class 1	1 m	5 VA
	500 A	Class 1	1 m	7.5 VA
	600 A	Class 1	1 m	10 VA

*Note: cable included

Connection Diagrams

