

Standard Disc Style




Features:

- Rugged, cost effective design
- -50°C to 150°C Operation
- Bare or epoxy coated
- Values from 100Ω to 20,000Ω
- Temperature measurement, control or compensation
- High sensitivity to changes in temperature
- Other tolerances and options available



Standard Disc Style

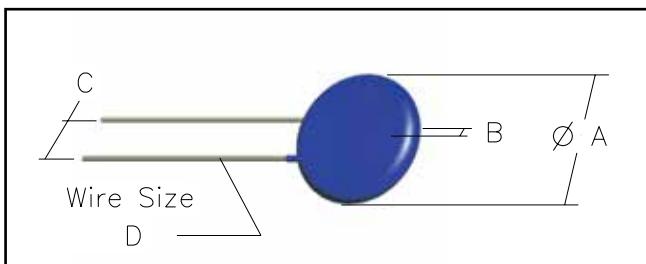

MS Standard Disc Style Thermistors

Part Number	R_{25} (Ω)	Matl*	A (max.)		B (max.)		C (typ.)		D AWG	δ (mW/°C)	t sec.
			in	mm	in	mm	in	mm			
D1002K10	100	K	0.360	9.14	0.150	3.81	0.250	6.35	24	9	35
D2002K10	200	K	0.260	6.60	0.160	4.06	0.156	3.96	24	7	20
D2502K10	250	K	0.260	6.60	0.160	4.06	0.156	3.96	24	7	20
D5002K10	500	K	0.215	5.46	0.160	4.06	0.080	2.03	26	5	15
D1003K10	1,000	K	0.150	3.81	0.150	3.81	0.080	2.03	26	3	10
D1003Z10	1,000	Z	0.260	6.60	0.140	3.56	0.156	3.96	24	7	20
D2003Z10	2,000	Z	0.215	5.46	0.140	3.56	0.080	2.03	26	7	20
D2253Z10	2,252	Z	0.215	5.46	0.140	3.56	0.080	2.03	26	5	15
D3003Z10	3,000	Z	0.215	5.46	0.150	3.81	0.080	2.03	26	5	15
D5003Z10	5,000	Z	0.150	3.81	0.140	3.56	0.080	2.03	26	3	10
D1004Z10	10,000	Z	0.150	3.81	0.160	4.06	0.080	2.03	26	3	10
D2004Z10	20,000	Z	0.150	3.81	0.160	4.06	0.080	2.03	26	3	10

Standard resistance tolerances available are: ±10%, ±5%, ±2% @25°C

*See R/T tables on page 57.

Basic P/N

Material

Wire Type

Tol. Code

Point-match Temperature (°C)
(only used if other than 25°C)

Example:

D1003K10-2
D5003Z10-5-100

Curve "K" Material, 1000Ω ± 2% at 25°C
Curve "Z" Material, 5kΩ at 25°C with tolerance rating of ±5% at 100°C

MS Resistance vs. Temperature Conversion Table Disc Style NTC Thermistor

Material	K			Z		
Temperature Coef. @25°C (α_{25})	-3.9 %/°C			-4.4 %/°C		
Resistance Ratio R_0/R_{25}	6.93			9.07		
Beta ($\beta_{25/85}$)	3498			3976		
Temperature (°F) (°C)	$\frac{R_t}{R_{25}}$	α (%/°C)	Curve Dev.	$\frac{R_t}{R_{25}}$	α (%/°C)	Curve Dev.
-58 -50	39.46	6.2	8.2	66.75	7.1	5.5
-40 -40	21.68	5.8	6.8	33.56	6.6	4.3
-22 -30	12.38	5.4	5.6	17.67	6.2	3.5
-4 -20	7.389	5.1	4.4	9.697	5.8	2.7
14 -10	4.482	4.8	3.3	5.530	5.4	2.0
32 0	2.825	4.5	2.3	3.265	5.1	1.4
50 10	1.830	4.2	1.2	1.990	4.8	0.8
68 20	1.216	4.0	0.3	1.249	4.5	0.3
77 25	1.000	3.9	0.0	1.000	4.4	0.0
86 30	0.8270	3.7	0.6	0.8056	4.3	0.3
104 40	0.5747	3.5	1.4	0.5325	4.0	0.7
122 50	0.4074	3.3	2.2	0.3601	3.8	1.2
140 60	0.2942	3.2	3.0	0.2487	3.6	1.6
158 70	0.2161	3.0	3.6	0.1752	3.4	2.0
176 80	0.1612	2.9	4.3	0.1256	3.2	2.3
185 85	0.1401	2.8	4.6	0.1071	3.2	2.5
194 90	0.1221	2.7	4.9	0.09162	3.1	2.7
212 100	0.09376	2.6	5.5	0.06787	2.9	3.0
230 110	0.07292	2.5	6.1	0.05102	2.8	3.3
248 120	0.05738	2.3	6.7	0.03887	2.7	3.6
257 125	0.05112	2.3	6.9	0.03409	2.6	3.8
266 130				0.02999	2.5	3.9
284 140				0.02342	2.4	4.1
302 150				0.01849	2.3	4.4

This R/T Conversion Table is provided for reference only. MS uses the Steinhart-Hart equation to calculate the nominal R_t/R_{25} value. 1°C tables are available upon request.

- **Rt/R₂₅**—The ratio of the thermistor resistance at any temperature divided by its resistance at 25°C. For example, if you select a 500Ω at 25°C thermistor in Material "K", you can calculate its nominal resistance at 100°C to be $500 \times .09376 = 46.88\Omega$.
- **α**—Negative temperature coefficient of resistance expressed in %/°C. This is the percentage change in thermistor resistance for a 1°C change in its body temperature. α is particularly useful in calculating the required resistance tolerance necessary to guarantee sensor accuracy. For example, a Material "Z" thermistor has an α of -3.80%/°C at 50°C. If you require a sensor that is accurate to within ± 2.0°C at 50°C, the thermistor must have a resistance tolerance of $(\pm 2.0^\circ\text{C}) \times (3.80\%/\text{°C}) = \pm 5.6\%$.
- **Curve Dev.** — Applies to thermistors that are point matched at 25°C. The Curve Dev. (%) must be added to the thermistor tolerance at 25°C to calculate the total tolerance or maximum deviation at any temperature. Curve Dev. accounts for the curve variance that occurs within any given batch or lot of thermistors. For example, if you specify a Material "Z" device with a ± 5% tolerance at 25°C, it will have a total tolerance at 80°C of $(\pm 5\%) + (\pm 2.3\%) = \pm 7.3\%$.