

# D45JCT160V


**Bridge Diodes**  
**1600V, 45A**

**Feature**

- Compact SIP
- UL E142422
- Pb free terminal
- RoHS:Yes

**OUTLINE**

Package (House Name): JC(5pin)

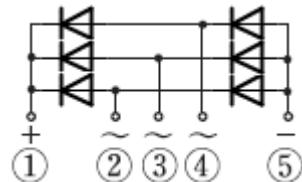**Equivalent circuit****Absolute Maximum Ratings** (unless otherwise specified :  $T_c=25^\circ\text{C}$ )

Item	Symbol	Conditions	Ratings	Unit
Storage temperature	$T_{stg}$		-55 to 150	°C
Junction temperature	$T_j$		-55 to 150	°C
Repetitive peak reverse voltage	$V_{RRM}$		1600	V
Average forward current	$I_F(AV)$	50Hz sine wave, Resistance load, With heatsink, $T_c=97^\circ\text{C}$	45	A
Average forward current	$I_F(AV)$	50Hz sine wave, Resistance load, Without heatsink, $T_a=25^\circ\text{C}$	4.6	A
Surge forward current	$I_{FSM}$	50Hz sine wave, Non-repetitive 1 cycle peak value, per diode, $T_j=25^\circ\text{C}$	450	A
Surge forward current	$I_{FSM1}$	$t_p=1\text{ms}$ , sine wave, Non-repetitive, peak value, per diode, $T_j=25^\circ\text{C}$	1423	A
Current squared time	$I^2t$	$1\text{ms} \leq t < 10\text{ms}$ , $T_j=25^\circ\text{C}$ , per diode	1013	$\text{A}^2\text{s}$
Dielectric strength	$V_{dis}$	Terminals to case backside, AC 1 minute Cut-off current 0.5mA, Except top (opposite side of the terminal side) of the mold case	2.5	kV
Mounting torque	$T_{OR}$	(Recommended torque : $1.2\text{N}\cdot\text{m}$ )	1.5	$\text{N}\cdot\text{m}$

\* : See the original Specifications


**Electrical Characteristics** (unless otherwise specified : Tc=25°C)

Item	Symbol	Conditions	Ratings			Unit
			MIN	TYP	MAX	
Forward voltage	V <sub>F</sub>	IF=15A, Pulse measurement, per diode			1.05	V
Reverse current	I <sub>R</sub>	VR=1600V, Pulse measurement, per diode			10	µA
Thermal resistance	R <sub>th(j-c)</sub>	Junction to case ,With heatsink			0.5	°C/W
Thermal resistance	R <sub>th(j-a)</sub>	Junction to ambient, Without heatsink			16	°C/W


\* : See the original Specifications

## CHARACTERISTIC DIAGRAMS


**Forward Voltage**

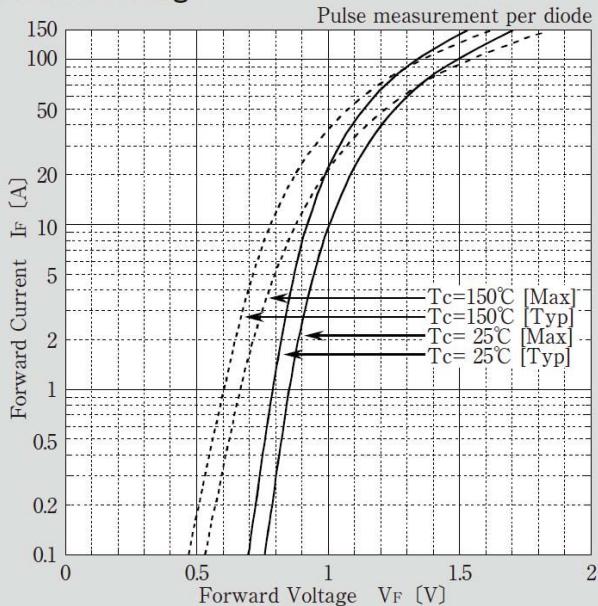


**Reverse Current**

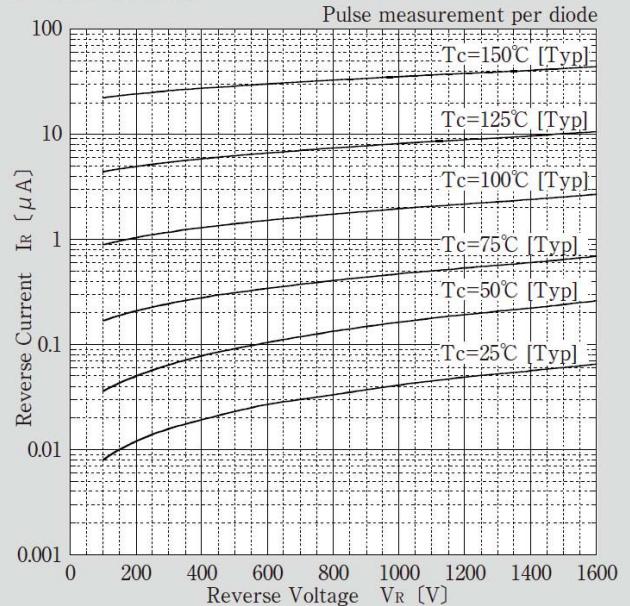

**Forward Power Dissipation**

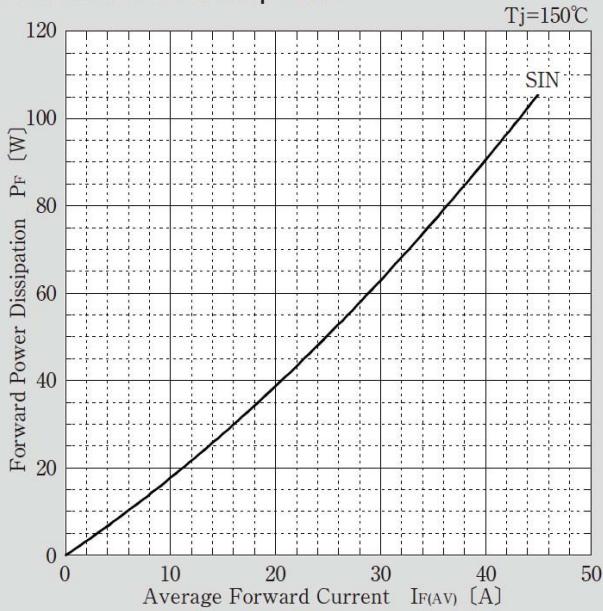


**Derating Curve**

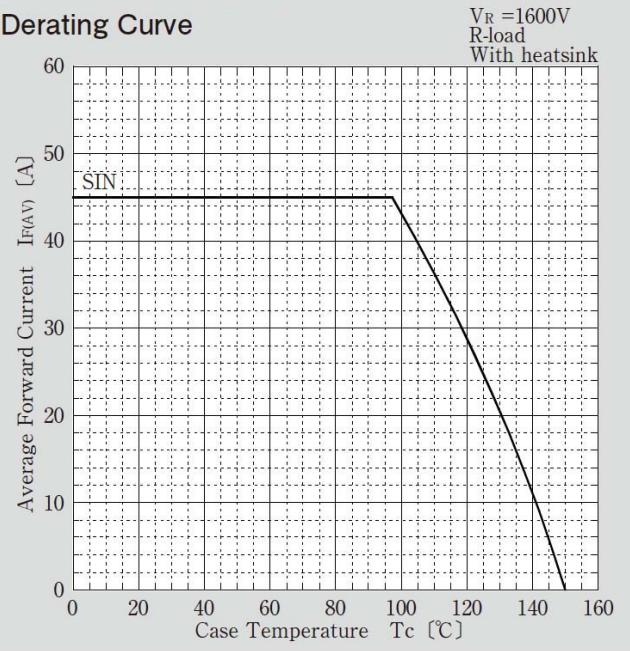


### Derating Curve

$V_R = 1600V$   
R-load  
With heatsink

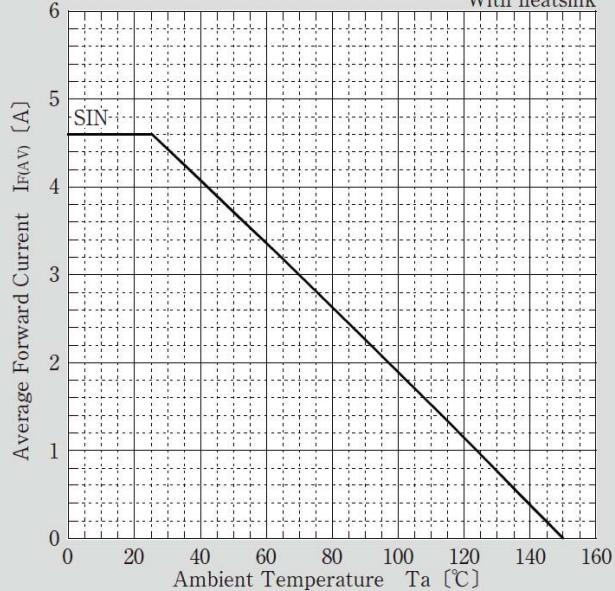


### Surge Forward Current Capability

$I_{FSM}$   
10ms  
10ms  
1cycle  
Sine wave  
Non-repetitive  
 $T_j = 25^\circ\text{C}$   
Per diode

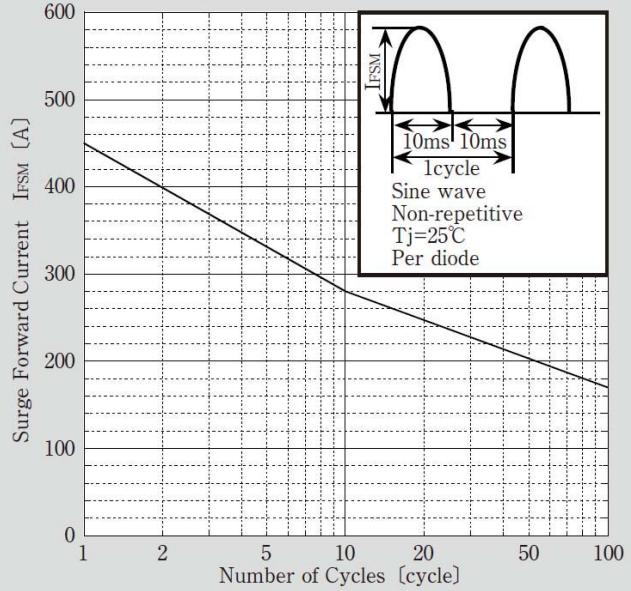


### Surge Forward Current Capability


$I_{FSM1}$   
tp  
Sine wave  
Non-repetitive  
 $T_j = 25^\circ\text{C}$   
Per diode

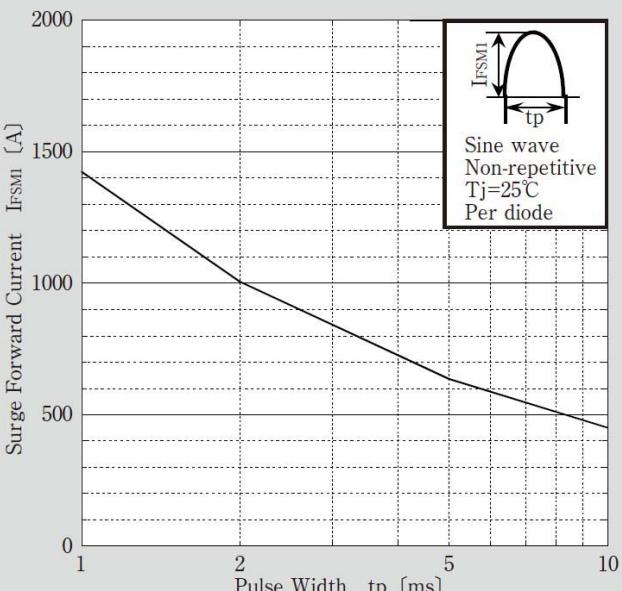


### Surge Forward Current Derating vs Junction Temperature

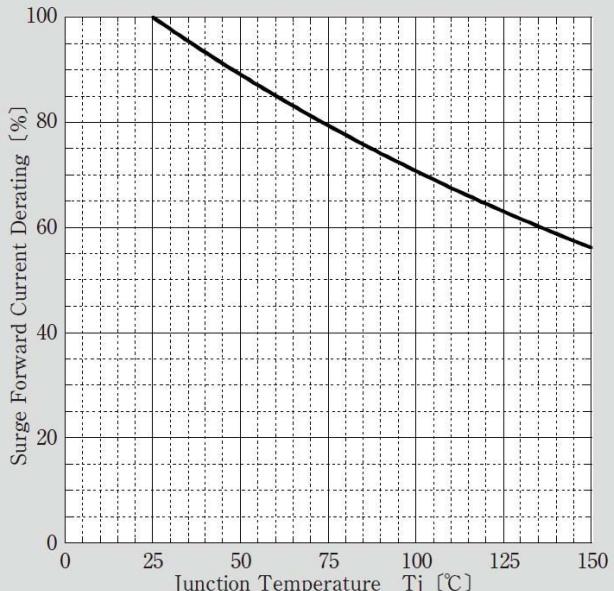

### Transient Thermal Impedance

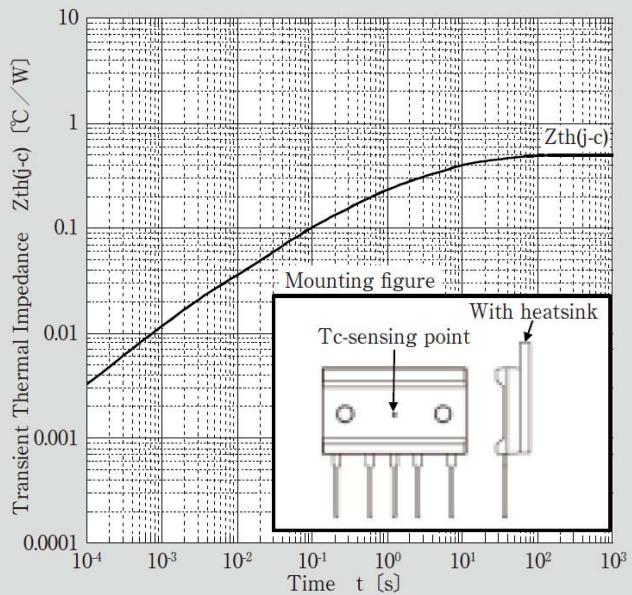

### Transient Thermal Impedance

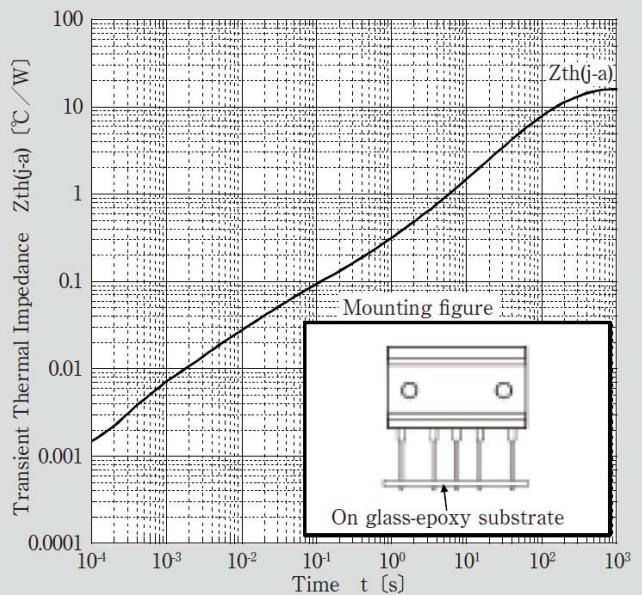

## Outline Dimensions

unit:mm

scale: 2/1

D8

JEDEC Code	-
JEITA Code	-
House Name	TSB(5pin),JC(5pin)

