


NOTES:

1.0 SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: 0.1 to 18.0 GHz
- 1.2 MAXIMUM INSERTION LOSS: 0.45dB
- 1.3 IMPEDANCE 50 OHMS
- 1.4 MAXIMUM VSWR :
 - 0.1 – 8.0GHz 1.20:1
 - 8.0 – 12.4GHz 1.25:1
 - 12.4 – 18.0GHz 1.35:1
- 1.5 DC WORKING VOLTAGE: 200 VOLTS
- 1.6 OPERATING TEMP. RANGE:
 - 20°C to +100°C
- 1.7 INSERTION LOSS @ 1 KHz: > 65dB

2.0 MARKING:


- 2.1 MARK UNIT AS SHOWN
(REF: INK-02597-27-02)
- 2.2 COVER MARKING WITH CLEAR TAPE

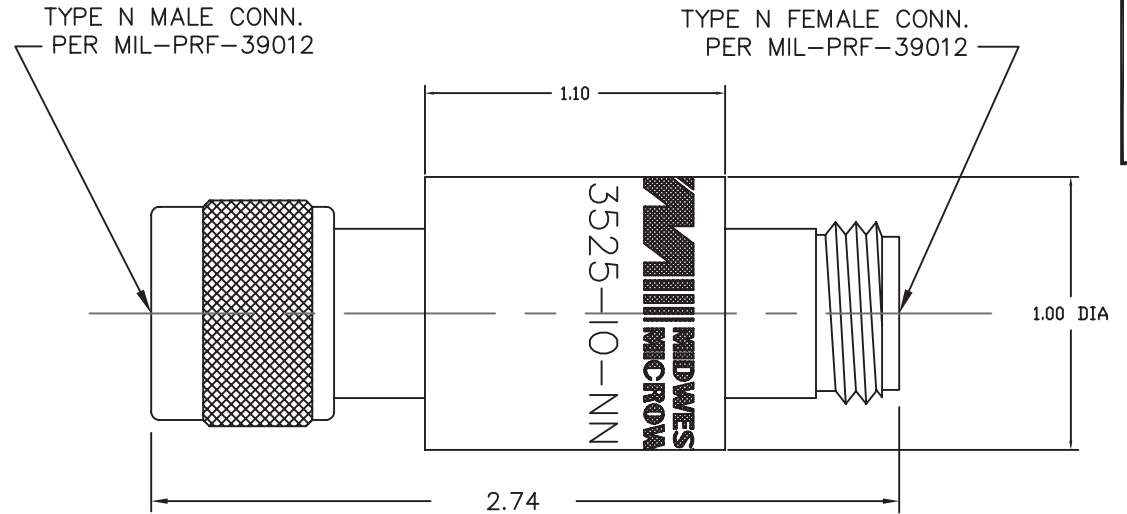

MODEL NUMBER
DCB-3525-10-NN-02

DWG. # WAS: 02358-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	4/30/79
A	ECR 6545	6/29/89
A1	REDRAWN ON CAD	8/26/91
A2	ADDED TITLEBLOCK	5/27/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±1°		CAGE CODE 34078	MIDWEST MICROWAVE	
				TITLE DC BLOCK OUTLINE DRAWING
DRAWN/DATE C.RICKARD 8/26/91	ENG./DATE G.KOZAK 9/5/91	DRAWING NUMBER DCB-3525-10-NN-02-01		REV. A2
CHECKED/DATE A.BEATTY 9/5/91	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1	