

Key Features

- Industry Highest Cell Capacity & High Energy
- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Wide operating temperature range (- 20°C / + 75°C)
- Low self-discharge with long operating life (<1% after 1 year of storage at + 20 °C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
 - Safety: IEC 60086-4
 - Transport: UN 38.3
 - RoHS and REACH compliance
 - Quality: ISO 9001, Duracell World Class Continuous Program

Electrical characteristics

▪ Nominal capacity (100 Ohm Cont., 2V cut-off)	920 mAh
▪ Typical Voltage (at + 20 °C)	3.2-3.3 V
▪ Standard Continuous Discharge Current	20 mA
▪ Maximum Continuous Discharge Current	60 mA
▪ Maximum Abnormal Charge Current	20 mA
▪ Nominal Energy	2.55 Wh
▪ AC Impedance @ 1kHz	300 mOhm

Physical characteristics

▪ Typical weight	11 g (0.39 oz.)
▪ Li metal content	approx. 0.30g

Operating & Storage conditions

▪ Operating temperature range	-20°C to 75°C (-4°F to 167°F)
▪ Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86° F)




Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharged data shown for examples of the energy/service life that the battery will provide for various load conditions.


Typical applications

- Cameras
- Security devices (sensors)
- Smoke Detectors
- Wireless Sensors
- Remote Controls
- Pet Training Collars
- High Intensity Flashlights
- Laser Sights


Rated Capacity
100 ohm Continuous

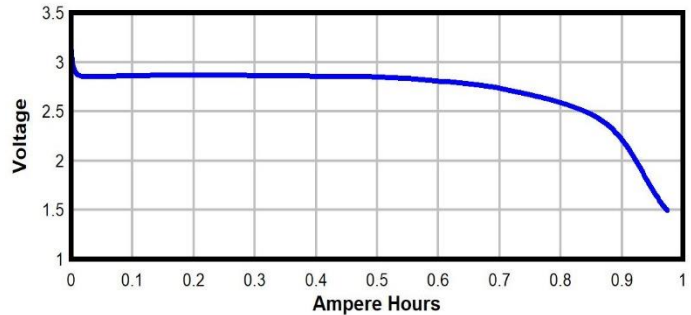

Pulse Discharge

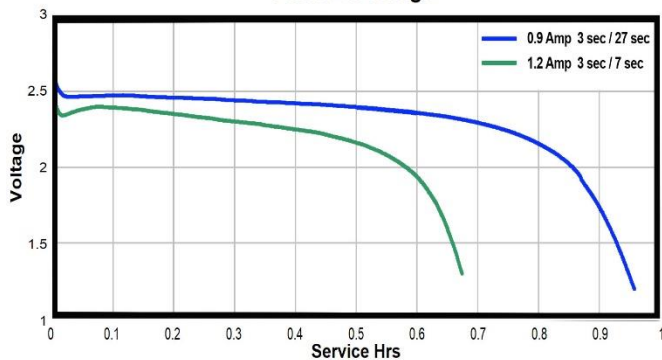


Pulse Discharge @ Variuos Temperatures
1.2A 3 sec / 7 sec

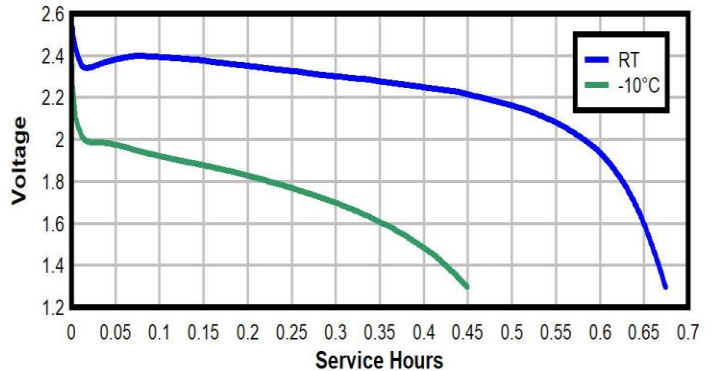

Continuous Load Discharge



Delivered Energy vs. Power Drain
@ Various Cutoff Voltage - Room Temperature

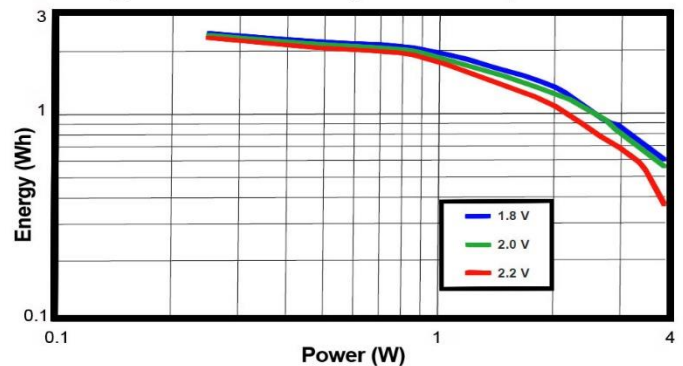

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.