

MEAS HTU21D SENSOR FOR GROVE SYSTEM

Digital Humidity and Temperature Sensor

The HTU21D provides the necessary hardware to interface the HTU21D digital relative humidity and temperature sensor to any system that utilizes Grove compatible expansion ports configurable for I²C communication. The HTU21D sensor is a self-contained humidity and temperature sensor that is fully calibrated during manufacturing. The sensor module works in 5V external, and the sensor has selectable resolution, low battery detection, and checksum capability. The HTU21D has a low power stand-by mode for power-sensitive applications.

Performance

- 0% to 100% relative humidity range
- -40°C to 125°C temperature range
- Very low power consumption
- Operates in 5V.
- Fast response time – 5 seconds typical
- Built-in heater for fast recovery from saturation
- Recovers fully from condensation
- Fast conversion time – 14ms typical

Specifications

- Measures relative humidity from 0% to 100%
- Measures temperature from -40°C to 125°C
- I²C communication
- Fully calibrated
- Fast response time
- Selectable resolution
- Very low power consumption


Features

- 4-pin Grove compatible connector
- I²C interface
- Selectable 8-12 bits resolution for humidity
- Selectable 11-14 bits resolution for temperature


MEAS HTU21D FOR GROVE SYSTEM

Digital Humidity and Temperature Sensor

Schematic

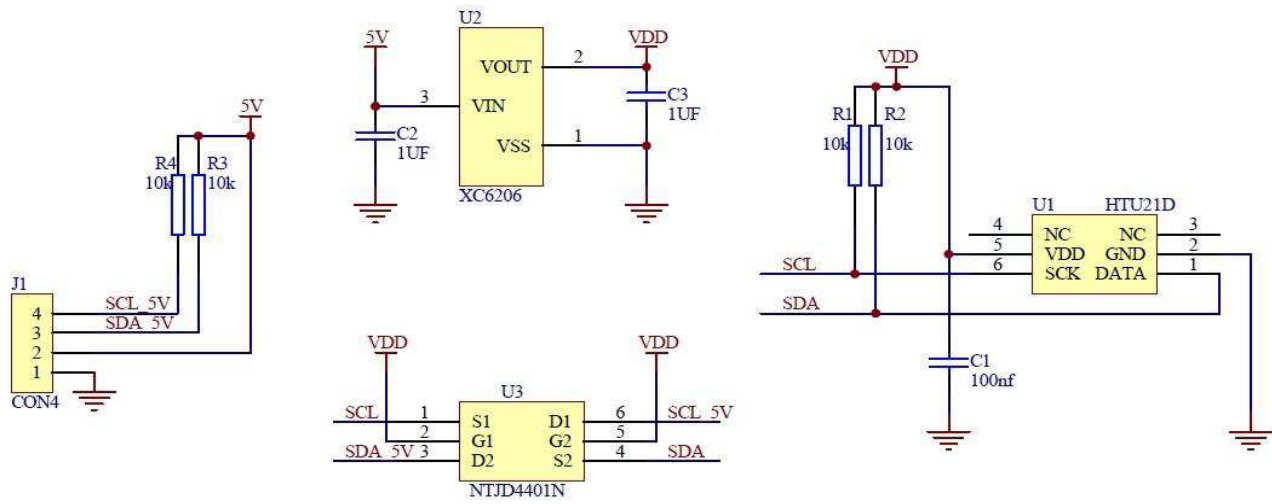

Connector Pin Assignments (I²C Communications)

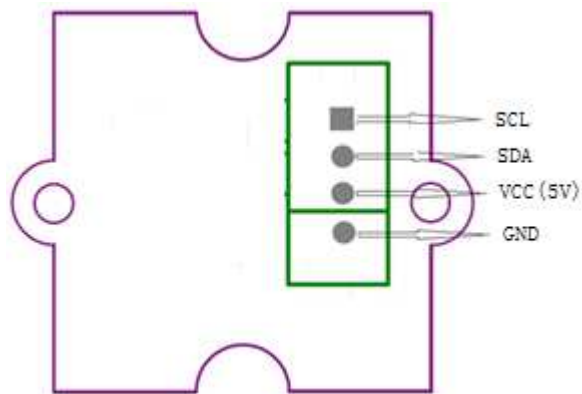

Dimensions (mm)

