

DPS SERIES ENCLOSURE

PART No.

NOTES:

2.

3.

4.

1. MATERIAL AND FLAMMABILITY RATING.

RESISTANT FOR OUT DOOR USE.

TO PASS 5VA PER UL746C


OPERATING TEMPERATURE IS -35 TO 110C.


PRE INSTALLED SILICONE GASKET IN COVER

BODY -PC LIGHT GRAY POLYCARBONATE - UL94-5VA COVER - PC LIGHT GRAY POLYCARBONATE - UL94-5VA


CLEAR COVER (C) - PC CLEAR POLYCARBONATE - UL94-V0 AND TESED


3, 3R, 4, 4X, 5, 6, 6P 12, 13. DESIGNED MEETS IP65, IP66, IP67, IP68 REQUIREMENTS. UV

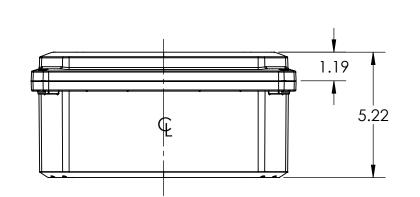

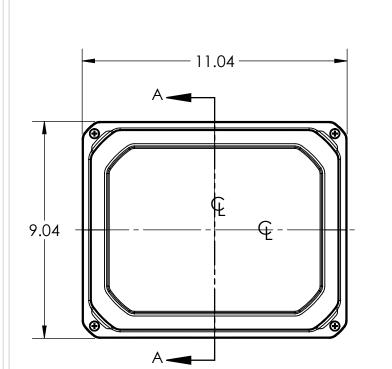

- SCREW CLOSE LID 5. BOX COMES WITH 4 UNINSTALLED MOUNTING BRACKETS AND HARDWARE (DPX-100) 6. **OPTIONAL ACCESSORIES:** 7. HINGE AND PANEL SUPPENSION KIT (DPX-444KIT) 8" FLANGE KIT (2 FLANGES + 4 SCREWS) (DPX-824KIT) FLOATING INTERNAL MOUNTING PANEL (DPX-287101) HINGED INTERNAL MOUNTING PANEL (DPX-287102) COVER MOUNTING PANEL (DPX-287103) . BASE INTERNAL MOUNTING PANEL (DPX-287104) ٠ 8. DIMENSIONS ARE INCH 8.10 **INSIDE TOP**
 - 3.13 2.00 1.00 M5 THREADED INSERTS X 4

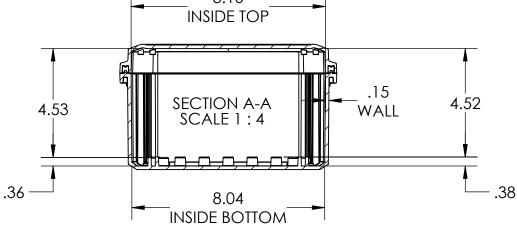

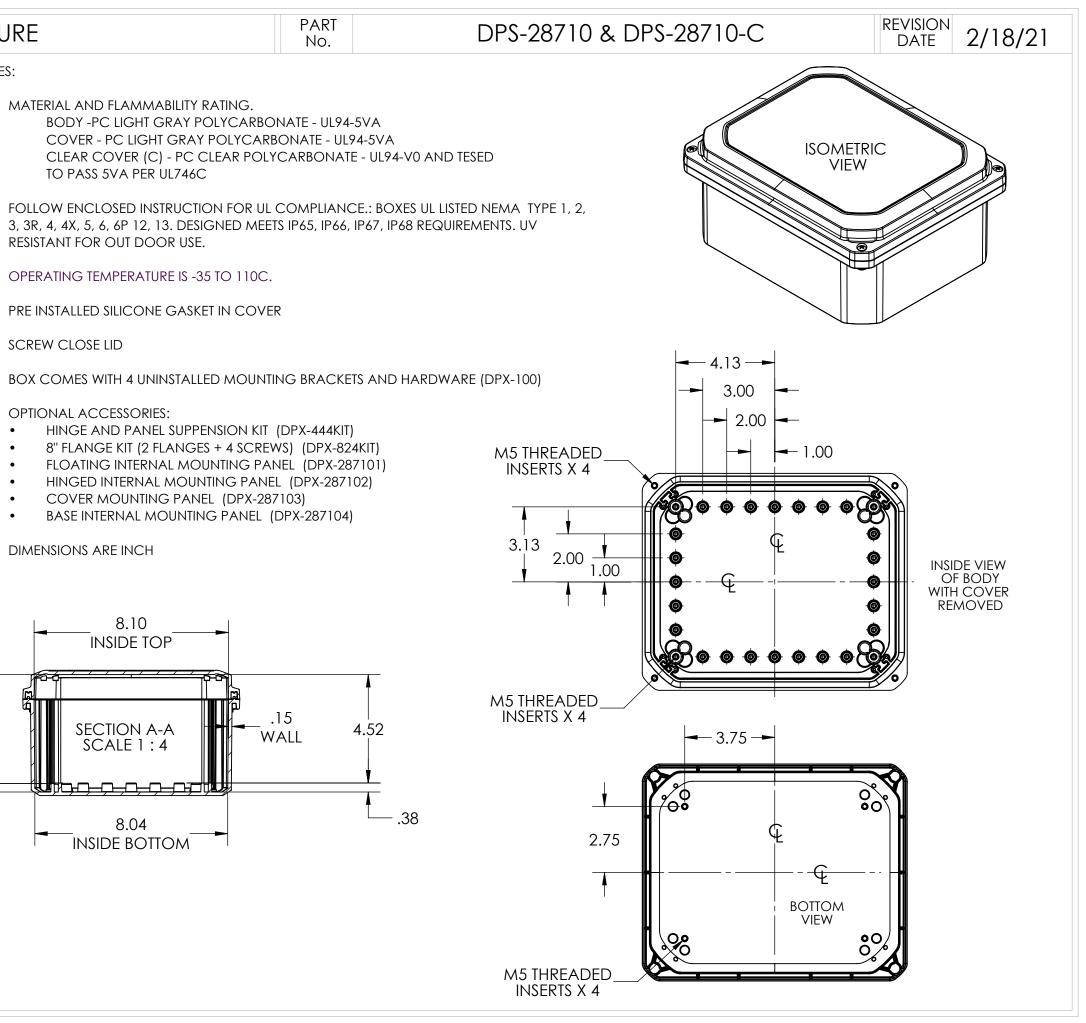

DRAWING FOR REFERENCE

WE RESERVE THE RIGHT TO MAKE CHANGES TO OUR STANDARD PRODUCTS. PLEASE CONSULT WITH BUD INDUSTRIES PRIOR TO USING THIS DRAWING FOR DESIGN PURPOSE.