

**ISOMETRIC** 

**VIEW** 

2/19/21

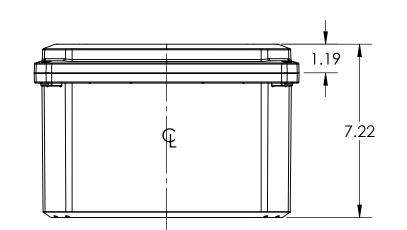

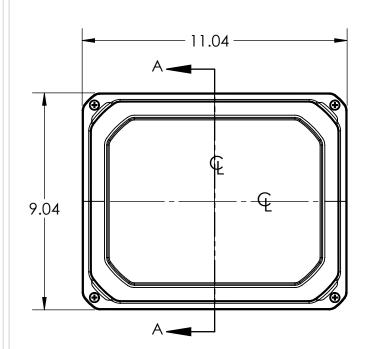



## NOTES:


I. MATERIAL AND FLAMMABILITY RATING.

BODY -PC LIGHT GRAY POLYCARBONATE - UL94-5VA COVER - PC LIGHT GRAY POLYCARBONATE - UL94-5VA CLEAR COVER (C) - PC CLEAR POLYCARBONATE - UL94-VO AND TESED TO PASS 5VA PER UL746C

- 2. FOLLOW ENCLOSED INSTRUCTION FOR UL COMPLIANCE.: BOXES UL LISTED NEMA TYPE 1, 2, 3, 3R, 4, 4X, 5, 6, 6P 12, 13. DESIGNED MEETS IP65, IP66, IP67, IP68 REQUIREMENTS. UV RESISTANT FOR OUT DOOR USE.
- 3. OPERATING TEMPERATURE IS -35 TO 110C.
- 4. PRE INSTALLED SILICONE GASKET IN COVER
- 5. SCREW CLOSE LID
- 6. BOX COMES WITH 4 UNINSTALLED MOUNTING BRACKETS AND HARDWARE (DPX-100)
- 7. OPTIONAL ACCESSORIES:
  - HINGE AND PANEL SUPPENSION KIT (DPX-444KIT)
  - 8" FLANGE KIT (2 FLANGES + 4 SCREWS) (DPX-824KIT)
  - FLOATING INTERNAL MOUNTING PANEL (DPX-287101)
  - HINGED INTERNAL MOUNTING PANEL (DPX-287102)
  - COVER MOUNTING PANEL (DPX-287103)
    BASE INTERNAL MOUNTING PANEL (DPX-287104)
- 8. DIMENSIONS ARE INCH

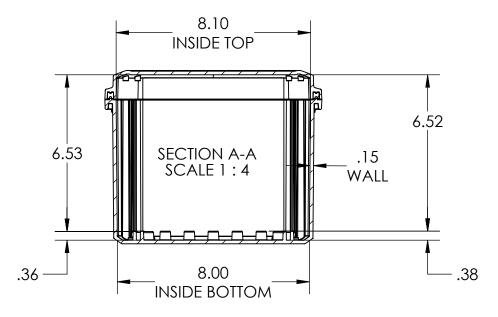

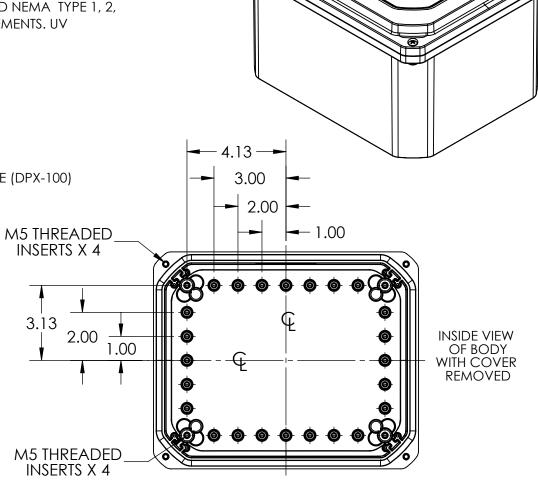

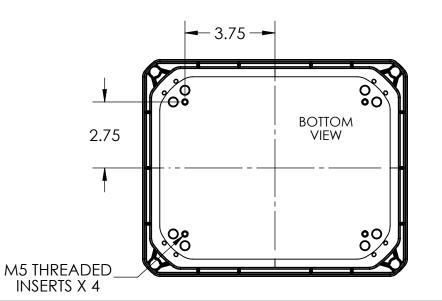

## **DRAWING FOR REFERENCE**

WE RESERVE THE RIGHT TO MAKE CHANGES TO OUR STANDARD PRODUCTS. PLEASE CONSULT WITH BUD INDUSTRIES PRIOR TO USING THIS DRAWING FOR DESIGN PURPOSE.