
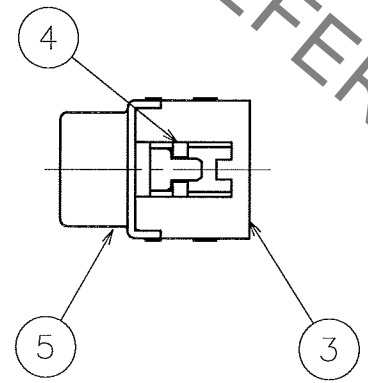
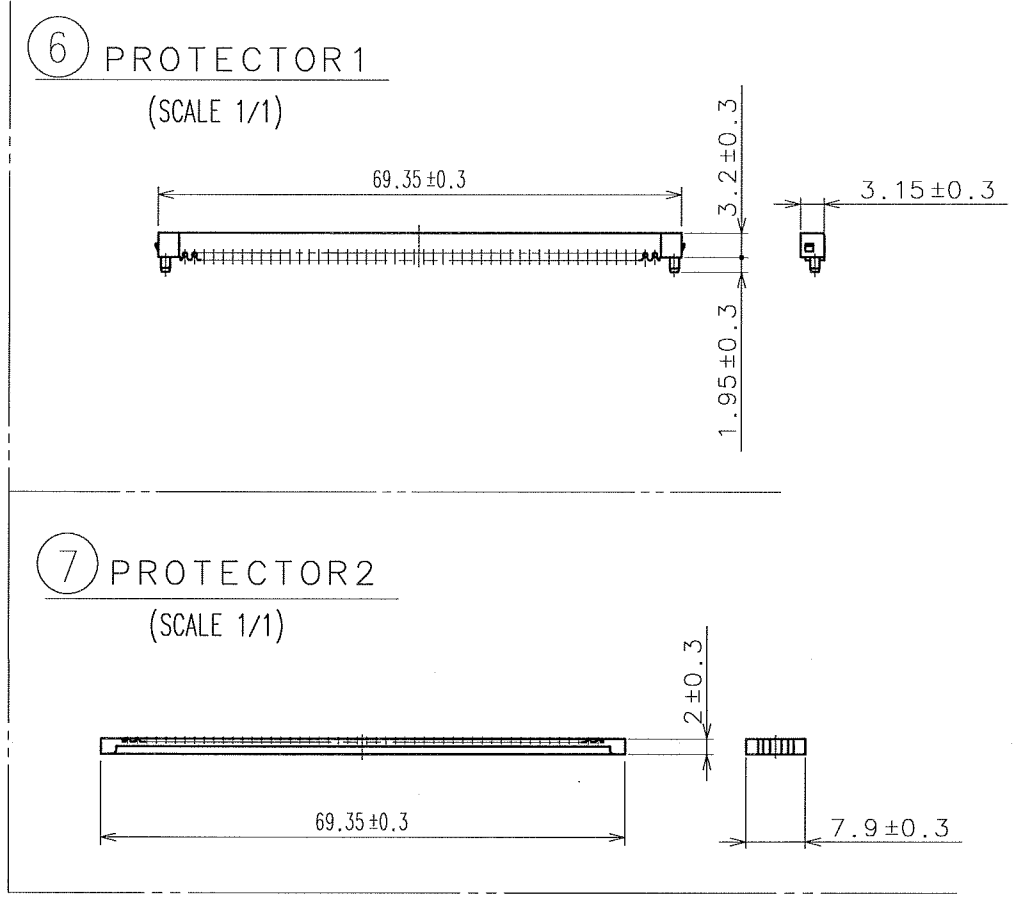


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-E-3269	E.M	H.T	96.11.12					
2	DIS-E-000197	Y.S	Y.E	05.08.29					

A
B
C
D
E
F

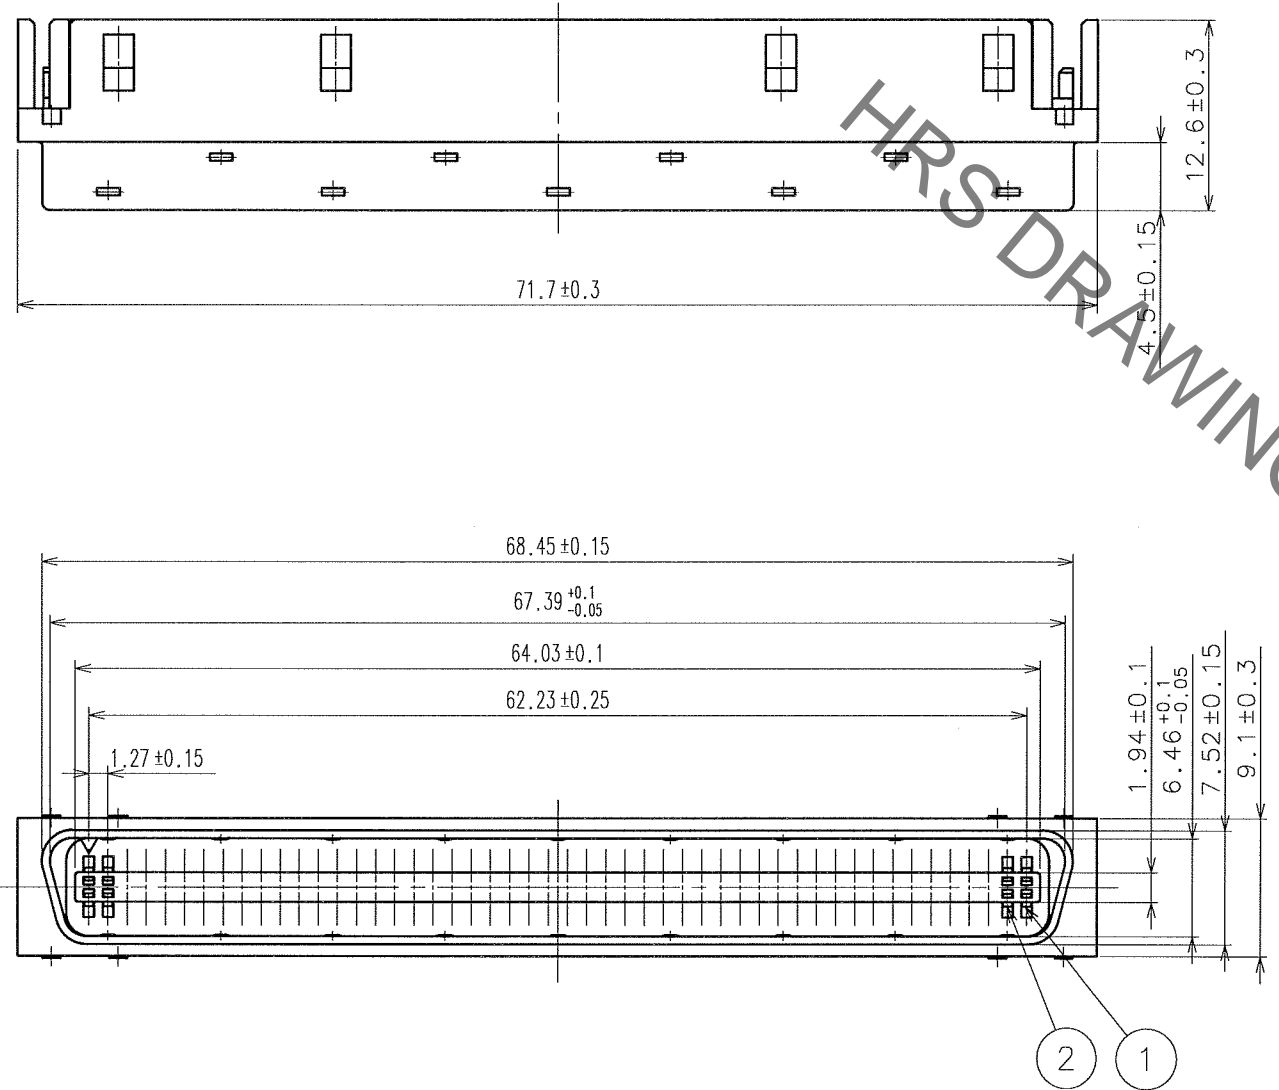

NOTE 1 REF.NO.3 RETENFORCE TO BE 100N MIN AT DIRECTION A.

4	PBT	UL94V-0 (BLACK)			
3	PBT	UL94V-0 (BLACK)	7	PBT	UL94V-0 (BLACK)
2	BERYLLIUM COPPER	CONTACT AREA: GOLD PLATED IDC AREA: GOLD FLASH PLATING	6	PBT	UL94V-0 (BLACK)
1	BERYLLIUM COPPER	CONTACT AREA: GOLD PLATED IDC AREA: GOLD FLASH PLATING	5	STEEL	NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	M.NAKAMURA	M.NAKAMURA	S.KIKUTA	A.NAKAZAWA	
	90.03.14	90.03.14	90.03.14	90.03.14	

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC3-040393 HRS HIROSE ELECTRIC CO., LTD	PART NO. DX30AM-100P CODE NO. CL230-5031-0	1/1
-----------------------------------	---	---	-----

TO
Q1