

## SUMMARY

### # Wires

Low voltage	4
Coax	4



*Image is for illustrative purpose only*

Series	0R
Termination type	Female crimp
IP rating	50
AWG wire size	0.00 - 0.00
Cable Ø	1.60 - 6.20 mm
Status	active
Matching parts	<a href="#">FGG.0R.804.GLC4162</a>

### Download

- [Request a quote](#)
- [Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	EBG*: Fixed receptacle, key (G) or key (A) with visible shell
Keying	3 keys (alpha=50,beta=30, plug: male contacts, receptacle: female contacts)
Housing Material	Crastin® PBT (Polybutylene terephthalate), gray
Weight	11.57 g

### Performance

Configuration	0R.804 : 4 Coax (50 Ohm), 4 Low V.
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated Current	2.0 Amps



### Specifications

Impedance:	50
Test Voltage (kV rms):	1.35

### Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# DRAWINGS

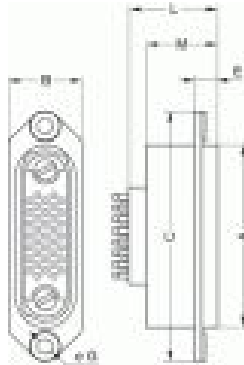

## Dimensions

	A	B	L	M
mm.	18	6	12	7
in.	0,71	0,24	0,47	0,28

# RECOMMENDED BY LEMO

## Tools

- Crimp Tool: [DPC.91.701.V](#)  
Crimp Tool 2: [DPE.99.003.1K](#)  
Crimp settings: AWG/Selector = 22-24-26/6-5-5  
Positionner: [DCE.91.070.BVM](#)  
Replacement contact: EGG.0B.655.ZZM

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.