

## Features

- 3.3 and 5 VDC voltage supply option
- Quadrature output
- Bushing or servo mount
- Non-contacting magnetic technology
- Small size
- CMOS and TTL compatible
- Resolution from 32-256 PPR
- Long life
- High operating speed
- Highly repeatable
- Sealed option
- Magnetic technology

## EMS22Q - Non-Contacting Incremental Encoder

### Electrical Characteristics

|   |   |
|---|---|
| Resolution .....                          | 32 to 256 PPR                           |
| Insulation Resistance (500 VDC) .....     | 1,000 megohms                           |
| Electrical Travel .....                   | Continuous                              |
| Supply Voltage .....                      | 5.0 VDC $\pm 10\%$ , 3.3 VDC $\pm 10\%$ |
| Supply Current .....                      | 20 mA maximum                           |
| Output Voltage                            |   |
| Low Output Level .....                    | Vss+0.4 V maximum                       |
| High Output Level .....                   | Vdd-0.5 V minimum                       |
| Output Current                            |   |
| With 4.5 VDC Supply Voltage .....         | 4 mA maximum                            |
| With 3.0 VDC Supply Voltage .....         | 2 mA maximum                            |
| Rise/Fall Time (Incremental Output) ..... | 500 ns maximum                          |
| Shaft RPM (Ball Bearing) .....            | 10,000 rpm maximum                      |
| Hysteresis .....                          | 0.7 °                                   |
| Accuracy                                  |   |
| Nominal .....                             | $\pm 0.7^\circ$ or better               |
| Worst Case .....                          | $\pm 1.4^\circ$                         |
| Output Transition Noise .....             | 0.12 ° RMS max.                         |

### Environmental Characteristics

|  |                                       |
|--|---------------------------------------|
| Operating Temperature Range .....                      | -40 °C to +125 °C (-40 °F to +257 °F) |
| Storage Temperature Range .....                        | -55 °C to +125 °C (-67 °F to +257 °F) |
| Humidity .....   | MIL-STD-202, Method 103B, Condition B |
| Vibration .....  | 15 G                                  |
| Shock .....  | 50 G                                  |
| Rotational Life  |                                       |
| S Bushing (@1,000 rpm) .....                           | 100,000,000 revolutions               |
| T & W Bushings (@1,000 rpm with 250 g side load) ..... | 50,000,000 revolutions                |
| IP Rating .....  | IP 65                                 |

### Mechanical Characteristics

|                         |  |
|-------------------------|--|
| Mechanical Angle .....  | 360 ° Continuous   |
| Torque                  |  |
| Starting .....          | 43 $\pm 21$ g-cm (0.6 $\pm 0.3$ oz-in.)  |
| Running .....           | 29 $\pm 14$ g-cm (0.4 $\pm 0.2$ oz-in.)  |
| Mounting Torque .....   | 203 N-cm (18 lb.-in.)  |
| Shaft End Play .....    | 0.30 mm (0.012 ") T.I.R. maximum   |
| Shaft Radial Play ..... | 0.12 mm (0.005 ") T.I.R. maximum   |
| Weight .....            | 11 gms. (0.4 oz.)  |
| Terminals .....         | Axial, radial or ribbon cable  |
| Soldering Condition     |  |
| Manual Soldering .....  | 96.5Sn/3.0Ag/0.5Cu solid wire or no-clean rosin cored wire<br>370 °C (700 °F) max. for 3 seconds |
| Wave Soldering .....    | 96.5Sn/3.0Ag/0.5Cu solder with no-clean flux<br>260 °C (500 °F) max. for 10 seconds              |
| Wash processes .....    | Not recommended  |
| Marking .....           | Manufacturer's trademark, name, part number, and date code.                                      |
| Hardware .....          | One lockwasher and one mounting nut supplied with each encoder, except on servo mount versions.  |

### Pin Configuration

| Output Type    | Pin 1 | Pin 2 | Pin 3 | Pin 4 | Pin 5 | Pin 6 |
|----------------|-------|-------|-------|-------|-------|-------|
| A/B Quadrature | A     | B     | GND   | Index | VCC*  | CS**  |

\* Can be 5 or 3.3 VDC depending on the version.

\*\* Active low chip select pin; if not used connect pin 6 to GND.




**WARNING Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

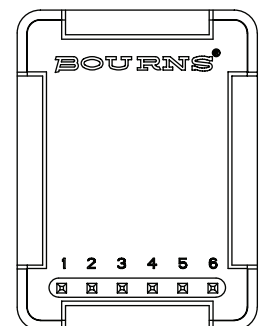

## Applications


- Material handling equipment
- Brushless DC motor commutation
- Robotics
- Automotive
- Industrial automation
- Petroleum refinery
- Medical (low/medium risk)\*
- Office equipment
- Audio and broadcast equipment

# EMS22Q - Non-Contacting Incremental Encoder

**BOURNS®**


## Output Type Waveform and Variant Table

### Quadrature Output

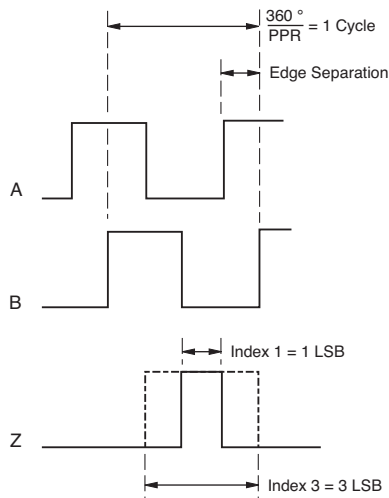

| PPR | 3.3 Vcc | 5.0 Vcc | Index 1 | Index 3 |
|-----|---------|---------|---------|---------|
| 256 | X       |         | X       |         |
| 256 | X       |         |         | X       |
| 256 |         | X       | X       |         |
| 256 |         | X       |         | X       |
| 128 | X       |         | X       |         |
| 128 | X       |         |         | X       |
| 128 |         | X       | X       |         |
| 128 |         | X       |         | X       |
| 64  | X       |         | X       |         |
| 64  | X       |         |         | X       |
| 64  |         | X       | X       |         |
| 64  |         | X       |         | X       |
| 32  | X       |         | X       |         |
| 32  | X       |         |         | X       |
| 32  |         | X       | X       |         |
| 32  |         | X       |         | X       |

Minimum edge separation =  $20 \times 256 / \text{PPR}$  (no missing pulses)

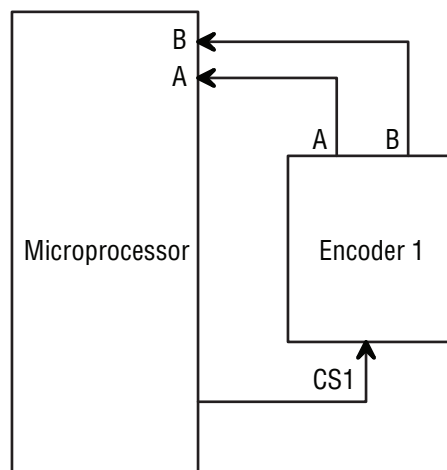

Chip Select Hardware Sample

\* Bourns® products have not been designed for and are not intended for use in "lifesaving," "life-critical" or "life-sustaining" applications nor any other applications where failure or malfunction of the Bourns® product may result in personal injury or death. See Legal Disclaimer Notice [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

Consult factory for options not shown, including:


- Wire lead or cable options
- Connectors
- Non-standard resolutions
- Special shaft/bushing sizes and features
- Special performance characteristics
- PCB mounting bracket

# EMS22Q - Non-Contacting Incremental Encoder




## Dimensional Drawings

### Shaft Style D (Bushing T)

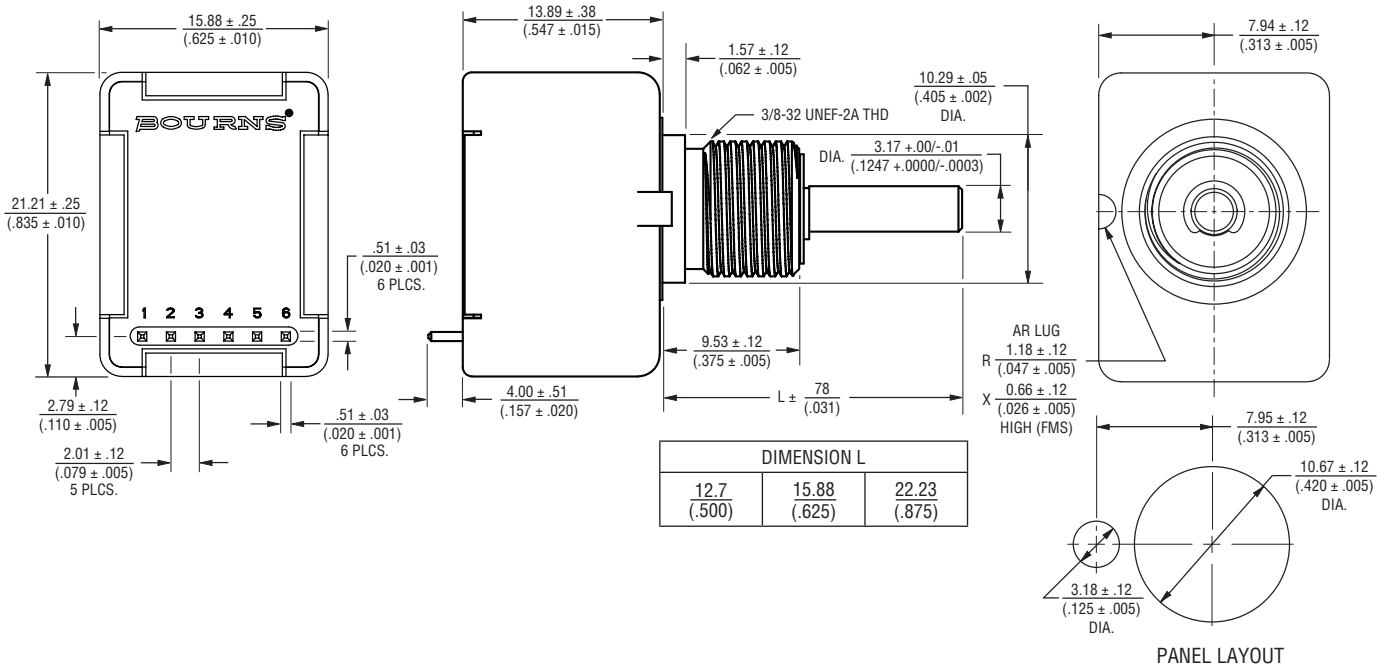

### Shaft Style B (Bushing S)

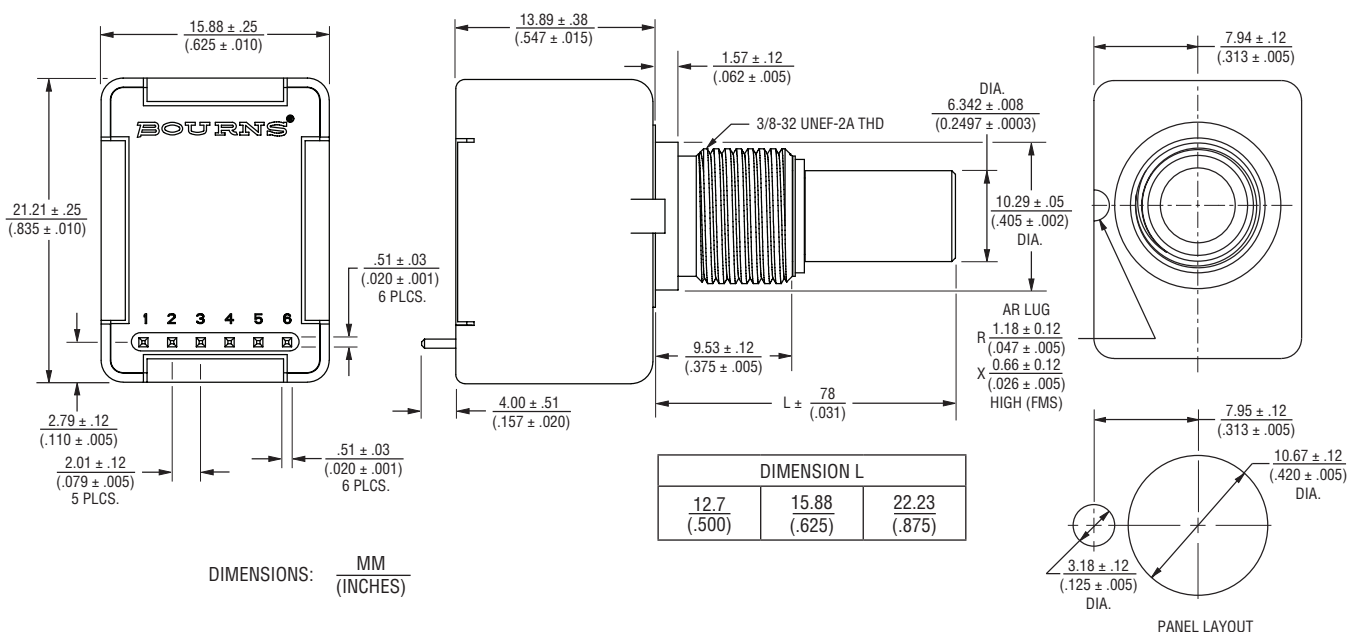

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# EMS22Q - Non-Contacting Incremental Encoder


**BOURNS®**

## Product Dimensions (Continued)


### Shaft Style D (Bushing W)

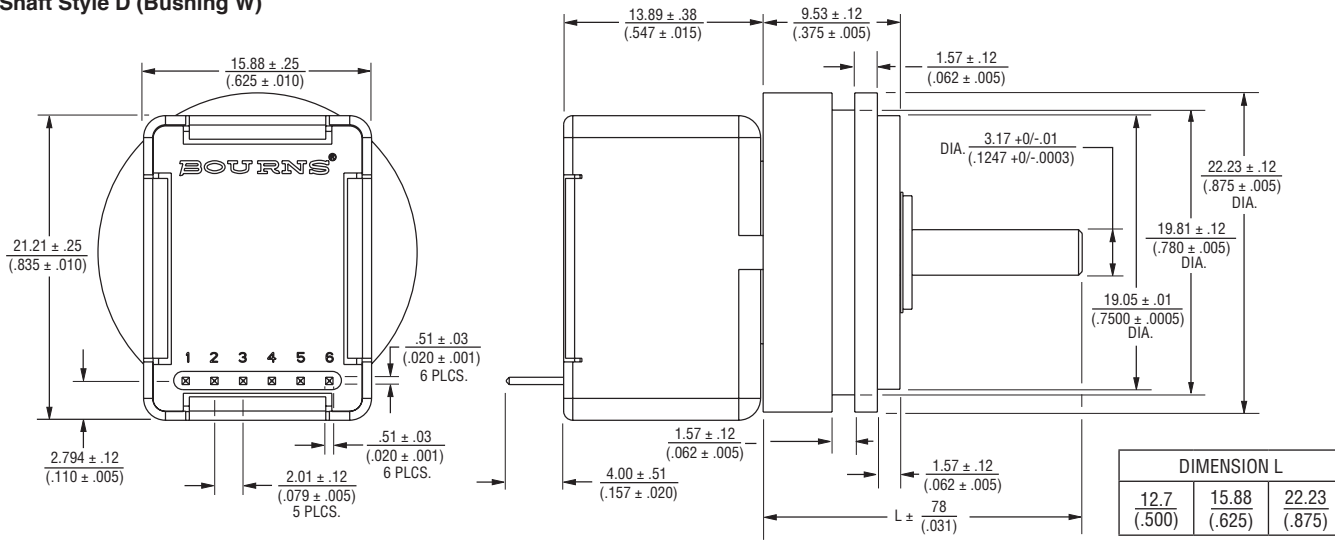


### Shaft Style C (Bushing S)

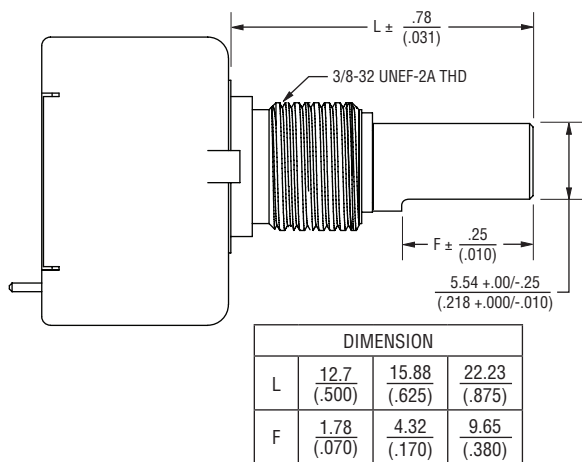

### Shaft Style M (Bushing D)

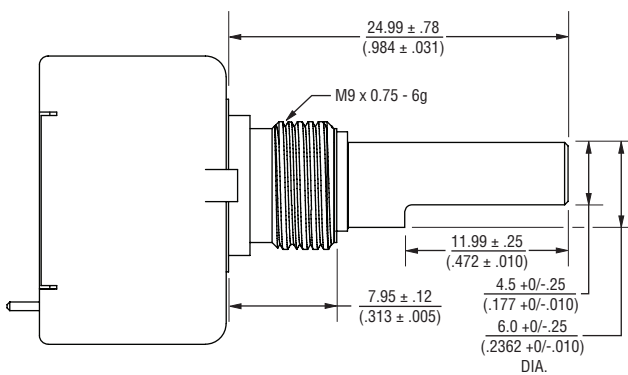

### Cable Assembly

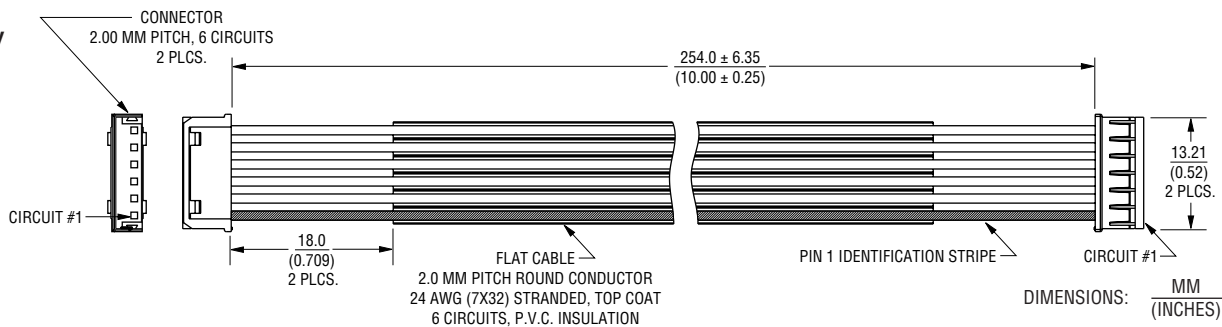

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# EMS22Q - Non-Contacting Incremental Encoder

**BOURNS®**

## How To Order

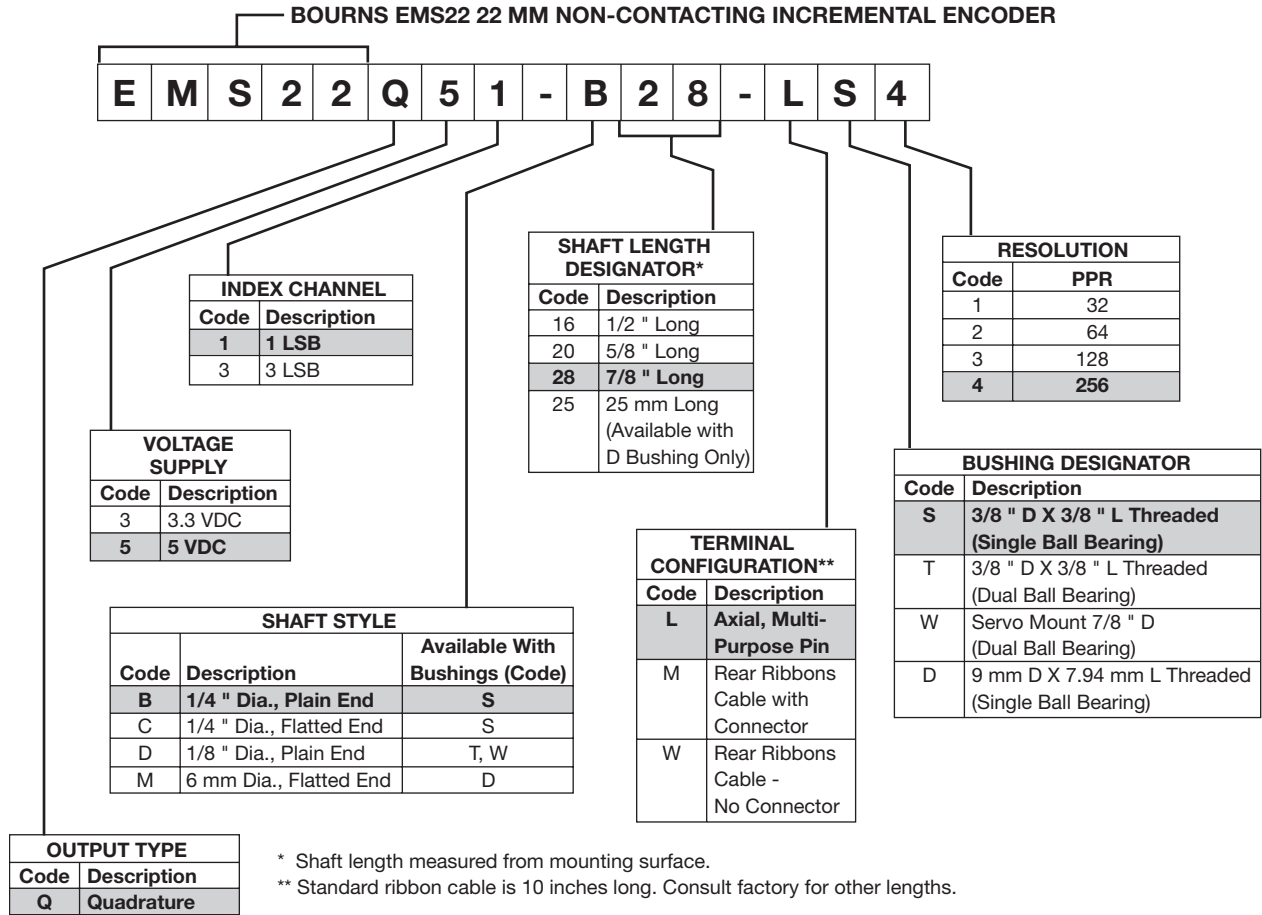

REV. 06/20

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).