







Series  
EPXA

Environmental insert  
With 1 cavity for size 5 socket contact.

Issue:  
April 16, 2002

Page  
1 / 1

Mating face

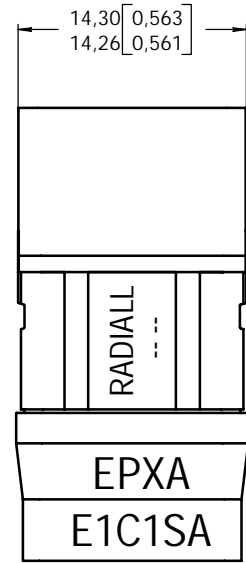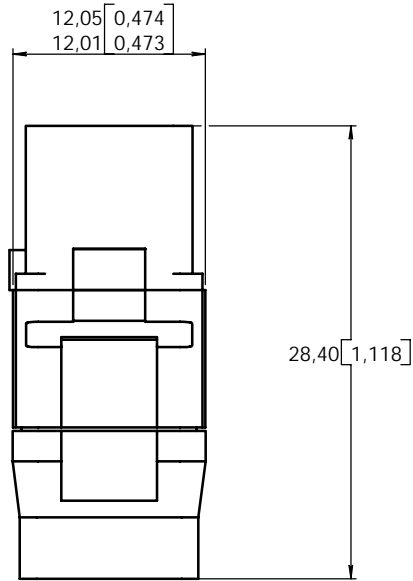


Materials:

- Insert : thermosetting fiberglass filled per ASTM D 5948-96, with metallic retention clips per ASTM-B-194
- Rear grommet : fluorosilicone elastomer per MIL-R-25988 B except 4.6.6.1.

Temperature range: -65°C +175°C (-85°F -347°F).

DIMENSIONS : mm (inch) -



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

|                   |           |      |          |  |
|-------------------|-----------|------|----------|--|
| CREATION          |           |      |          |  |
| PEN:              |           |      |          |  |
| NOM: LAHERA       |           |      |          |  |
| DATE: Apr 16 2002 |           |      |          |  |
| APPR.: G.Motteau  |           |      |          |  |
| Issue             | Revisions | Name | Approved |  |

