







Series  
EPXB

20C1 ENVIRONMENTAL INSERT - POLARIZATION B  
19 CAVITIES FOR SIZE 20 SOCKET CONTACTS  
1 CAVITY FOR SIZE 5 SOCKET CONTACT

Issue:  
Oct. 9, 2001

Page  
1 / 1

**MATING FACE**

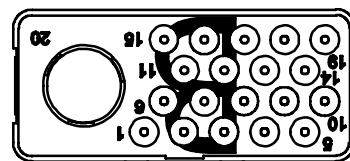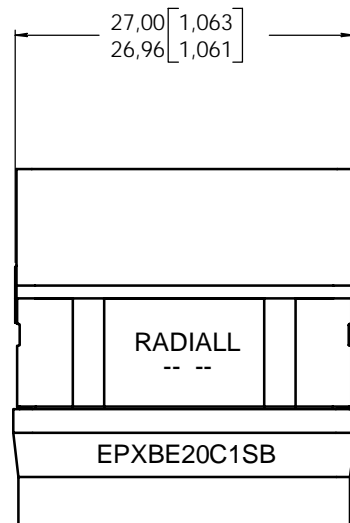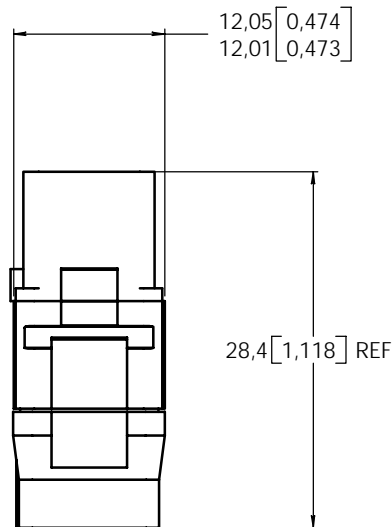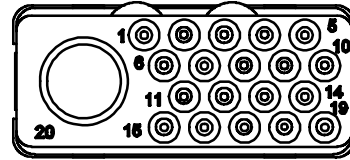


Materials

- Insert : thermosetting fiberglass filled per ASTM D 5948-96, with metallic retention clips per ASTM-B-194
- Rear grommet : fluorosilicone elastomer per MIL-R-25988 B except 4.6.6.1

Temperature range : -65°C +175°C (-85°F +347°F)

**DIMENSIONS: mm (inch) -**



CREATION				
PEN:				
NOM: L Garcia				
DATE: Oct. 9, 2001				
APPR.: G. Motteau				
Issue	Revisions	Name	Approved	

**RADIALL**<sup>®</sup>