



ER1AAFC ~ ER1JAFC Series

Surface Mount Super Fast Recovery Rectifier

Voltage 50~600 V Current 1 A


Features

- For surface mounted applications in order to optimize board space
- High temperature metallurgically bonded-no compression contacts as found in other diode-constructed rectifiers
- Glass passivated junction
- Easy pick and place
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : Molded plastic, SMAF-C
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0012 ounces, 0.034 grams

SMAF-C



Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	ER1AAFC	ER1BAFC	ER1CAFC	ER1DAFC	ER1EAFC	ER1GAFC	ER1JAFC	UNITS		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	V		
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	V		
Maximum DC Blocking Voltage	V_R	50	100	150	200	300	400	600	V		
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1							A		
Peak Forward Surge Current : 8.3 ms Single Half Sine-Wave Superimposed On Rated Load	I_{FSM}	30							A		
Instantaneous Forward Voltage at 1A	V_F	0.95			1.25		1.7	V			
Reverse Current	I_R	1							uA		
Typical Junction Capacitance Measured at 1 MHz And Applied $V_R = 4V$	C_J	15							pF		
Reverse Recovery Time ^(Note 1)	T_{RR}	35							ns		
Typical Thermal Resistance ^(Note 2) ^(Note 3)	$R_{\theta JL}$ $R_{\theta JA}$	24 150							$^\circ\text{C}/\text{W}$		
Operating Junction Temperature Range	T_J	-55 to +150							$^\circ\text{C}$		
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ\text{C}$		

NOTES:

1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1\text{A}$, Recover to 0.25A
2. Mounted on a FR4 PCB, single-sided copper, with 48cm^2 copper pad area
3. Mounted on a FR4 PCB, single-sided copper, standard footprint



ER1AAFC ~ ER1JAFC Series

TYPICAL CHARACTERISTIC CURVES

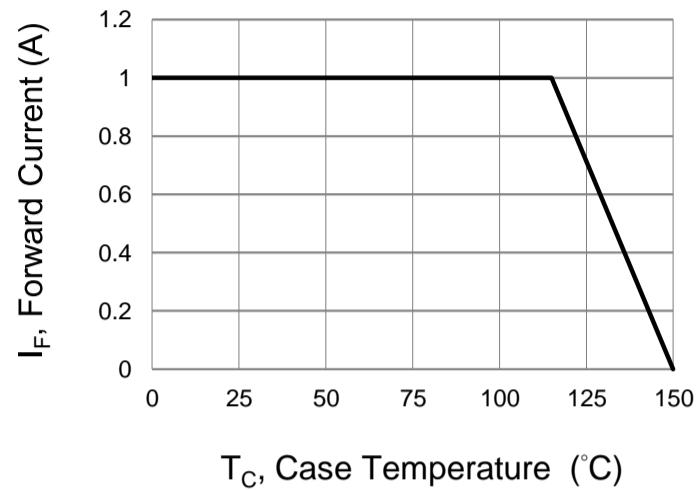


Fig.1 Forward Current Derating Curve

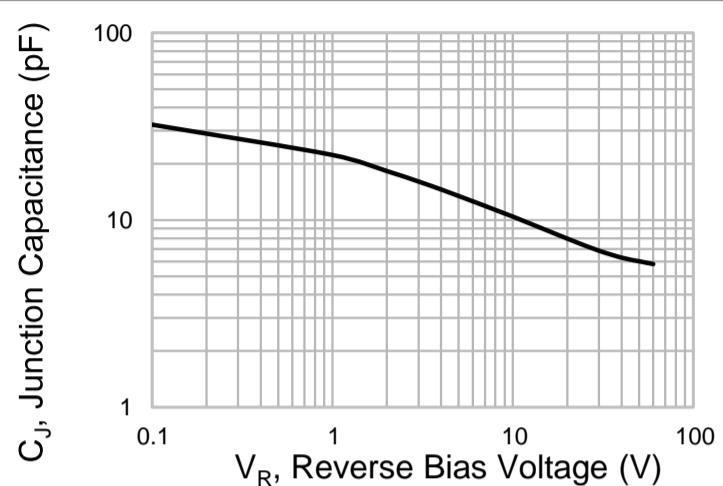


Fig.2 Typical Junction Capacitance

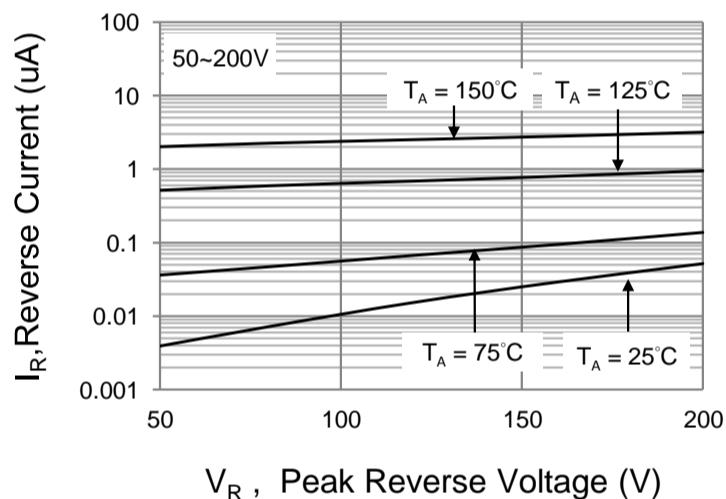


Fig.3 Typical Reverse Characteristics

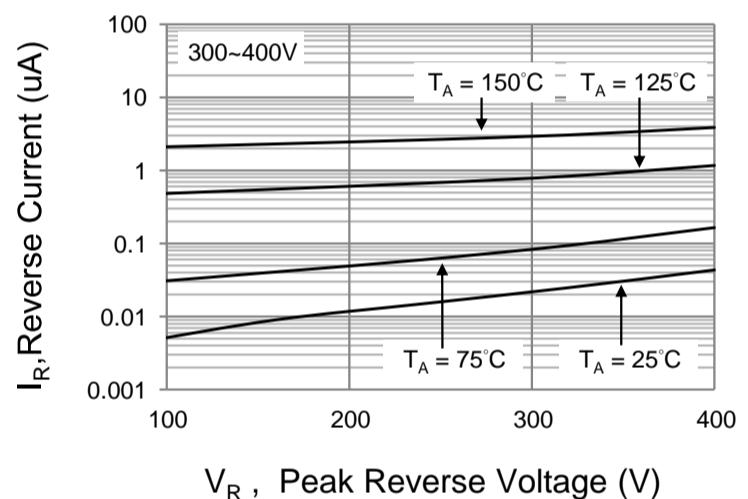


Fig.4 Typical Reverse Characteristics

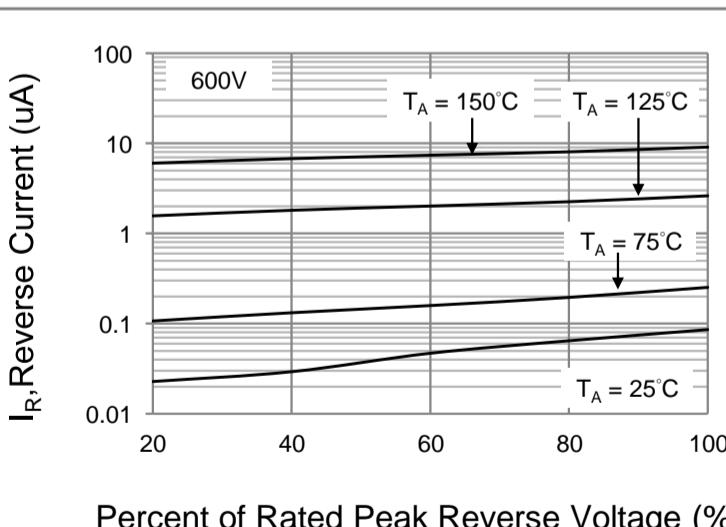


Fig.5 Typical Reverse Characteristics

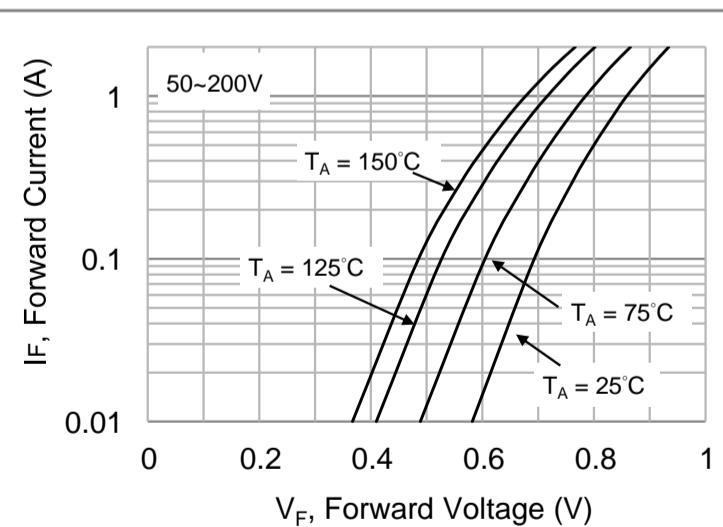


Fig.6 Typical Forward Characteristics



ER1AAFC ~ ER1JAFC Series

TYPICAL CHARACTERISTIC CURVES

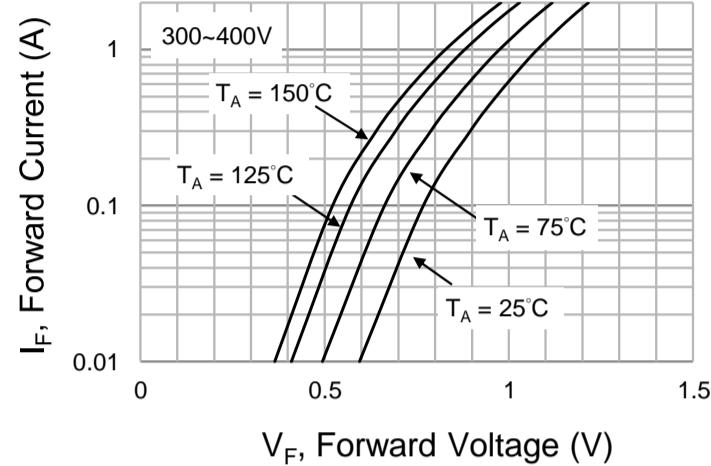


Fig.7 Typical Forward Characteristics

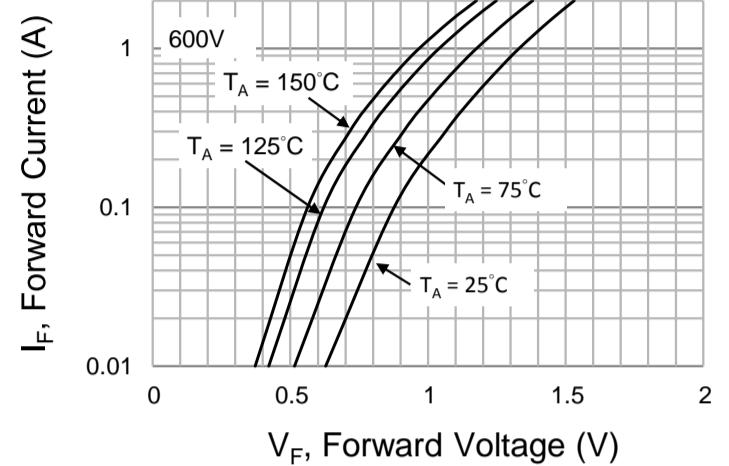


Fig.8 Typical Forward Characteristics



ER1AAFC ~ ER1JAFC Series

Part No. Packing Code Version

Part No. Packing Code	Package Type	Packing Type	Marking	Version
ER1AAFC_R1_00001	SMAF-C	3K pcs / 7" reel	ER1A	Halogen free
ER1BAFC_R1_00001	SMAF-C	3K pcs / 7" reel	ER1B	Halogen free
ER1CAFC_R1_00001	SMAF-C	3K pcs / 7" reel	ER1C	Halogen free
ER1DAFC_R1_00001	SMAF-C	3K pcs / 7" reel	ER1D	Halogen free
ER1EAFC_R1_00001	SMAF-C	3K pcs / 7" reel	ER1E	Halogen free
ER1GAFC_R1_00001	SMAF-C	3K pcs / 7" reel	ER1G	Halogen free
ER1JAFC_R1_00001	SMAF-C	3K pcs / 7" reel	ER1J	Halogen free

Packaging Information & Mounting Pad Layout

