

Edge Intelligent IOT Gateway


Edge Communication for Remote Maintenance

Edge
Solution Ready
Package

ESRP-PCS-ECU1051



- Accelerate service & maintenance processes by digitizing equipment
- Dual SIM for telecommunication redundancy to limit downtime of remote service
- Advanced data publishing and backup capabilities for real-time monitoring and historical queries

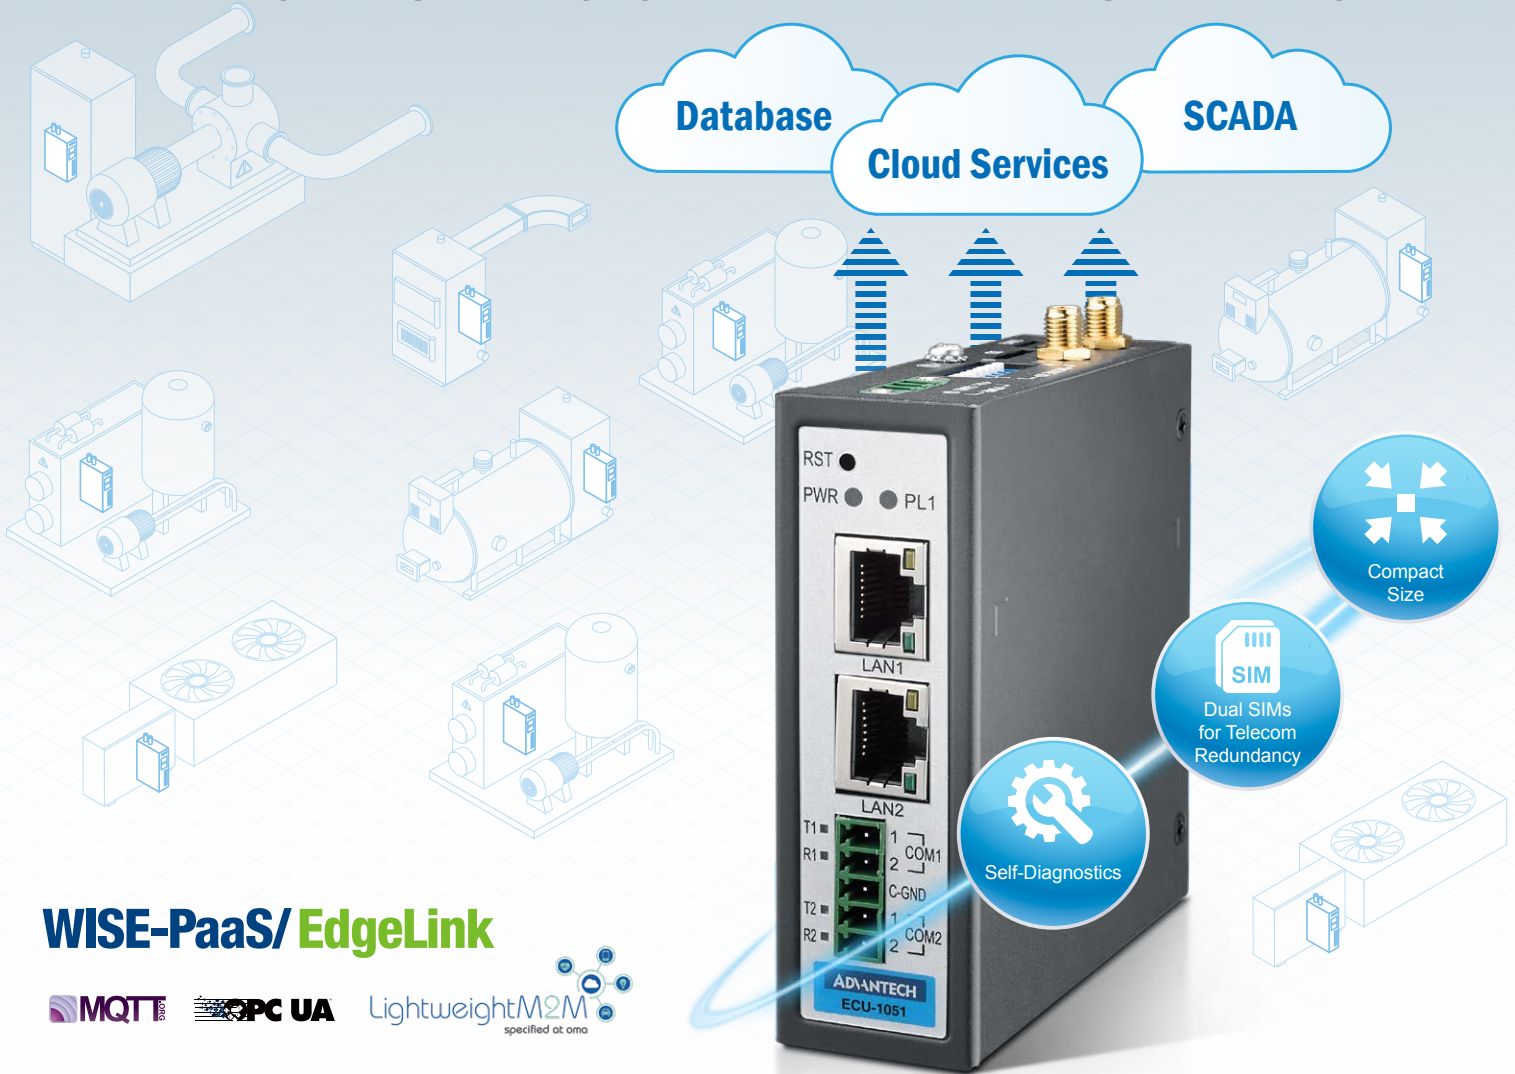

WISE-PaaS/EdgeLink



LightweightM2M
specified at oia

ADVANTECH

Enabling an Intelligent Planet

POWERED BY
ADVANTECH
WISE-PaaS

Edge Solution-Ready Package

ESRP-PCS-ECU1051



Accelerate service & maintenance processes by digitizing equipment

With the help of EdgeLink technology, equipment status can be defined as multiple tags. Users can track real-time data from equipment located anywhere in the field and then use the information to improve their business in numerous ways. With the tags subscription service, the information on temperature, pressure, and power consumption can be delivered timely and accurately to minimize equipment downtime and maintain peak productivity levels.



Dual SIMs for telecommunication redundancy to limit downtime of remote service

Within a given area, a service provider may either not be present or offer only unreliable connectivity related to poor signal strength. With a dual SIM card holder, our Edge SRP provides communication backup by switching between two independent mobile networks.



Advanced data publishing and backup capabilities for real-time monitoring and historical queries

The ECU gateway enables serial and Ethernet-based connections to databases and ERP applications. It independently acquires process and manufacturing data through a variety of interfaces and passes it directly onwards to higher-level management systems. In the case of a connection break, EdgeLink handles the buffering of the arriving data, provides a time stamp, and sends it to the database after the connection has been reestablished.

Edge Intelligent Hardware Feature	
CPU	Cortex-A8, 600MHz
Memory	DDR3L 256MB
Storage	NAND Flash 512MB
Data Storage	4GB SD card
Communication Interface	2xRS-232/485 (Screw Terminal)
	2 x RJ45 (IPv4/IPv6)
Wireless Connectivity	LTE/3G/2G(Optional)
	WLAN (WIFI) / Bluetooth (Optional)
Display Interface	Power LED, Software Run LED
SIM Holder	2 x Nano SIM Slots
Power Input	10-30VDC
Installation	DIN-Rail / Wall Mounting
Operating Temperature	-40~70°C
Certification	CE/FCC Class A

Embedded Software Features	
Operation System	Real-Time Embedded Linux, Kernel v4.9.69
Security	HTTPS/SSL, TLS, SSH
Data Service	MQTT, LwM2M, Web Service
Programming	IEC-61131-3 , Linux C
Networking	DHCP, HTTP, FTP, NTP
	OPC-UA Client & Server
	IEC-60870-5-104 Master & Slave
Support Protocols	Modbus RTU/TCP Master & Slave
	BACnet/IP Server
Data Monitoring	2000 Tags Max.
Data Remote backup	200 Tags Max.
Event Manager	SMS , E-Mail
VPN Tunneling	Open VPN Client
Time Management	NTP Client, SNTP Client, GPS
Configuration Options	WISE-PaaS/EdgeLink Studio Multi-Prog Express(IEC-61131-3)

Ordering Information

ESRP-PCS-ECU1051

Compact size protocol gateway with EdgeLink, 2xLAN, 2xCOM, 4GB Storage