



# EVL8009-V-00H

## Fully Integrated, 802.3af/at Compliant PoE PD Interface with High-Efficiency PSR Flyback Controller Evaluation Board

### DESCRIPTION

The EVL8009-V-00H is an evaluation board designed to demonstrate the capabilities of the MP8009, an integrated, IEEE 802.3af/at power over Ethernet (PoE), powered device (PD) power supply converter. It also includes a PD interface and a highly efficient flyback/forward controller.

The PD interface features all IEEE 802.3af/at capabilities, including detection, 1-event classification, 2-event classification, a 120mA inrush current limit, an 840mA operation current limit, and a 100V hot-swap MOSFET.

The flyback/forward controller is a low-cost, small-sized, isolated solution with primary-side regulation (PSR) for flyback applications. It also features high-efficiency secondary-side regulation (SSR) for active-clamp forward applications. The controller can also be used for SSR flyback topologies.

The MP8009 can support a PoE-PD front-end solution with minimal external components, and is available in QFN-28 (4mmx5mm) package.

### ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input voltage	$V_{IN}$	36 to 57	V
Output voltage	$V_{OUT}$	12	V
Output current	$I_{OUT}$	2.1	A

### FEATURES

- 36V to 57V Power over Ethernet (PoE) Input or 48V Auxiliary Adapter Input
- 12V Output Voltage ( $V_{OUT}$ )
- 2.1A Output Current ( $I_{OUT}$ )
- Primary-Side Regulation (PSR) for Flyback Applications
- 802.3af/at-Compatible
- Frequency Dithering for Electromagnetic Interference (EMI) Reduction
- Overload Protection (OLP), Short-Circuit Protection (SCP), and Over-Voltage Protection (OVP) with Hiccup Mode for Each Protection
- Thermal Shutdown
- Available in QFN-28 (4mmx5mm) Package


**Optimized Performance with MPS MPL-AL5050 Inductor Series**

### APPLICATIONS

- IEEE 802.3af/at-Compatible Devices
- Security Cameras
- Video Phones
- Wireless Local Area Network (WLAN) Access Points
- Internet of Things (IoT) Devices


All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

## EVL8009-V-00H EVALUATION BOARD

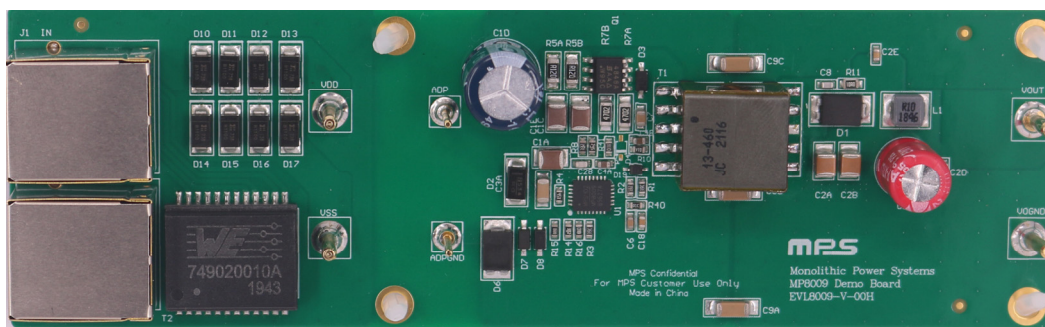

**LxWxH (13.9cmx4.2cmx2cm)**

Board Number	MPS IC Number	MPS Inductor
EVL8009-V-00H	MP8009GV	MPL-AL5050-100

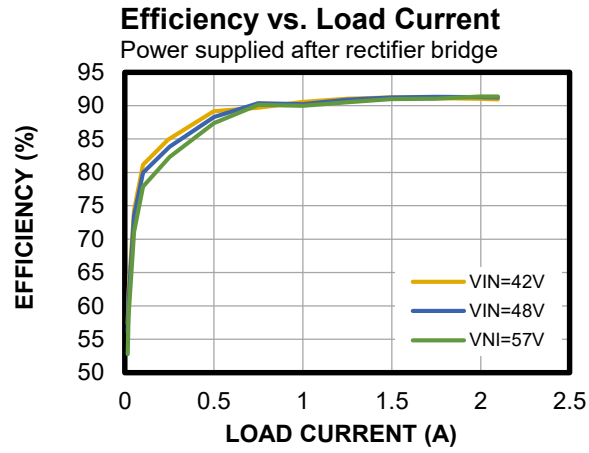

## QUICK START GUIDE

The evaluation board's output voltage ( $V_{OUT}$ ) is set at 12V. The board layout accommodates most commonly used components. The EVL8009-V-00H has two start-up methods (described below).

### Method 1:

1. Connect the load terminals to:
  - a. Positive (+): VOUT
  - b. Negative (-): VOGND
2. Use the Ethernet cable to connect PSE power to the Ethernet jack (J1). The board should start up automatically.

### Method 2:

1. Preset the power supply between 40V and 57V, then turn off the power supply. <sup>(1)</sup>
2. Connect the power supply terminals to:
  - a. Positive (+): VDD
  - b. Negative (-): VSS
3. Connect the load terminals to:
  - a. Positive (+): VOUT
  - b. Negative (-): VOGND
4. After making the connections, turn on the power supply. The board should start up automatically.
5. To use the adapter supply function, connect the 48V adapter terminals to:
  - a. Positive (+): ADP
  - b. Negative (-): ADPGND
6. After making the connections, turn on the adapter. The board should automatically use the adapter as its power supply.

### Note:

- 1) After start-up, the board can operate between 36V and 57V.

### EVALUATION BOARD SCHEMATIC

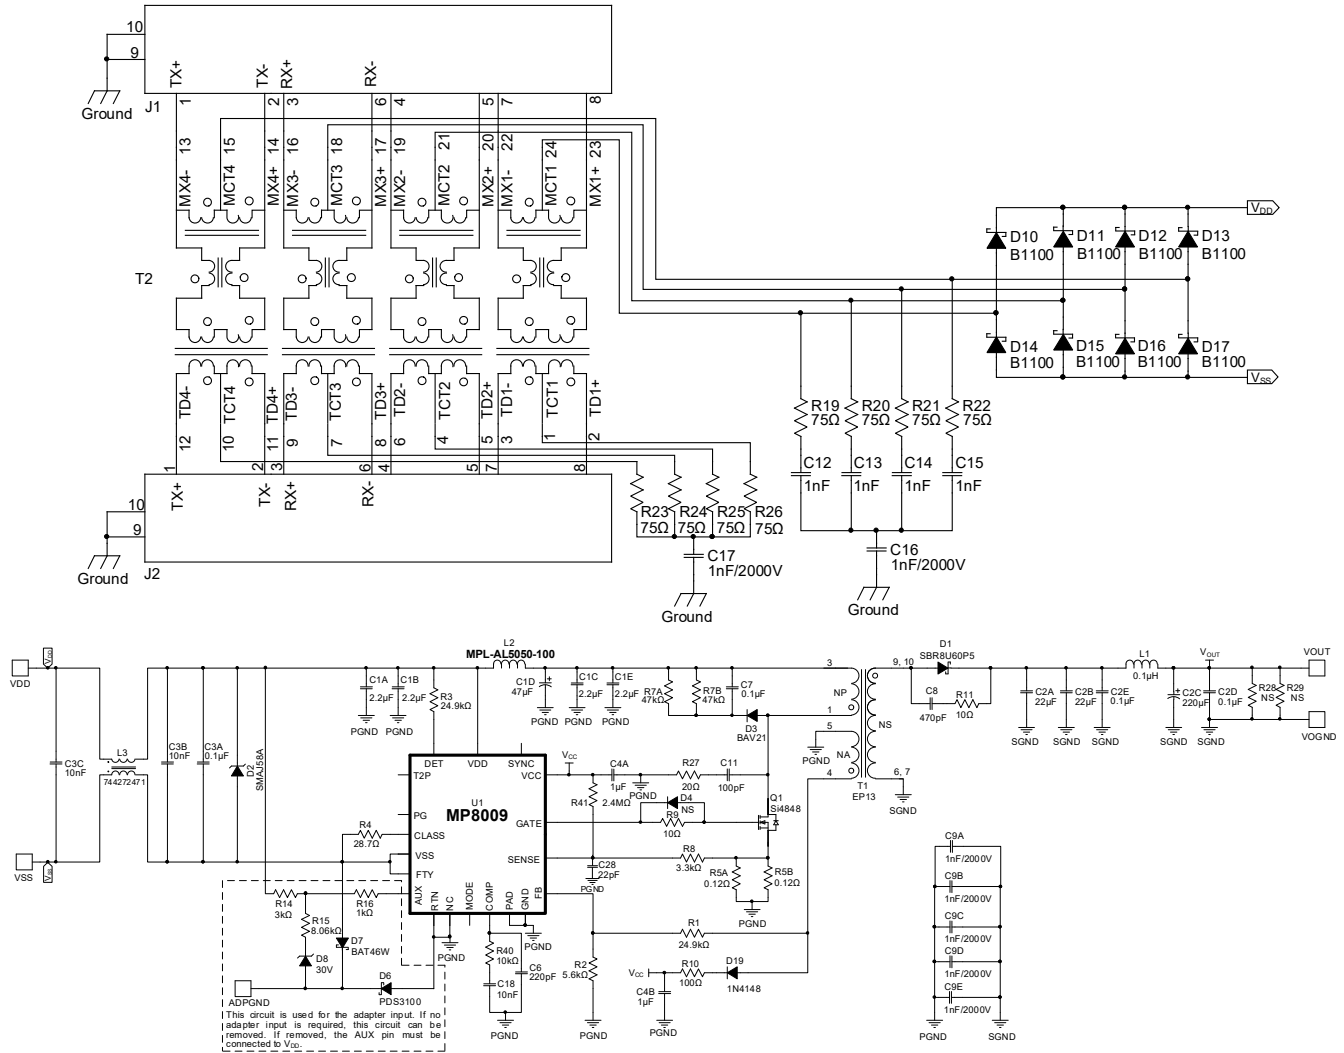


Figure 1: Evaluation Board Schematic (2) (3)

**Notes:**

- 2) For improved EMI performance, the evaluation board's frequency dithering setting is on by default. If a stable switching test is required, set R8 below 1kΩ. Set R41 accordingly to maintain the original R41:R8 ratio.
- 3) Primary-side regulation (PSR) flyback topologies require a minimum load on the isolated V<sub>OUT</sub>. If the system does not sink a current from V<sub>OUT</sub>, then a dummy load (I<sub>LOAD</sub> > 30mA) with R28 and R29 (both 820Ω with a 1206 package) is required; otherwise, the circuit may trigger over-voltage protection (OVP).

**EVL8009-V-00H BILL OF MATERIALS**

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	L2	10 $\mu$ H	Inductor, I <sub>RATED</sub> = 4.8A, I <sub>SAT</sub> = 5.5A, RDC = 43.5m $\Omega$	5050	MPS	MPL-AL5050-100
4	C1A, C1B, C1C, C1E	2.2 $\mu$ F	Ceramic capacitor, 100V, X7R	1210	Murata	GRM32ER72A225KA88L
1	C1D	47 $\mu$ F	CD284, 105 $^{\circ}$ C	DIP	Jianghai	ECR2AXY470MLB100012
2	C2A, C2B	22 $\mu$ F	Ceramic capacitor, 25V, X7R	1210	Murata	GRM32ER71E226KA88L
1	C2C	220 $\mu$ F	Electrolytic capacitor, 25V	DIP	Würth	860080474010
2	C2D, C2E	0.1 $\mu$ F	Ceramic capacitor, 25V, X7R	0603	Murata	GRM188R71E104KA01D
1	C3A	0.1 $\mu$ F	Ceramic capacitor, 100V, X7R	1206	Murata	GRM319R72A104KA01D
2	C3B, C3C	10nF	Ceramic capacitor, 100V, X7R	0603	Murata	GRM188R72A103KA01D
2	C4A, C4B	1 $\mu$ F	Ceramic capacitor, 25V, X7R	0603	Murata	GRM188R71E105KA01D
1	C6	220pF	Ceramic capacitor, 16V, X7R	0603	Murata	GRM188R71C221KA01D
1	C7	0.1 $\mu$ F	Ceramic capacitor, 100V, X7R	0805	Murata	GRM21BR72A104KA01D
1	C8	470pF	Ceramic capacitor, 100V, X7R	0603	Murata	GRM188R72A471KA01D
3	D4, R28, R29	NS				
7	C9A, C9B, C9C, C9D, C9E, C16, C17	1nF	Ceramic capacitor, 2000V, X7R	1808	Murata	GR442QR73D102KW01L
1	C11	100pF	Ceramic capacitor, 250V, X7R	0805	Murata	GRM21BR72E101KA01D
4	C12, C13, C14, C15	1nF	Ceramic capacitor, 100V, X7R	0603	Murata	GRM188R72A102KA01D
1	C18	10nF	Ceramic capacitor, 16V, X7R	0603	Murata	GRM188R71C103KA01D
1	C28	22pF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H220KA01D
1	D1	60V	Schottky diode, 8A	Power DI 5	Diodes, Inc.	SBR8U60P5
1	D2	400W	TVS diode, 4.3A	SMA	Littelfuse, Inc.	SMAJ58A
1	D3	200V	Switching diode, 200mA	SOD-123	Diodes, Inc.	BAV21W-7-F
1	D6	100V	Diode, 3A	Power DI 5	Diodes, Inc.	PDS3100
1	D7	100V	Diode, 150mA	SOD-123	Diodes, Inc.	BAT46W
1	D8	30V	Zener diode, 500mW	SOD-123	Diodes, Inc.	BZT52C30-7-F
8	D10, D11, D12, D13, D14, D15, D16, D17	100V	Schottky diode, 1A	SMA	Diodes, Inc.	B1100
1	D19	75V	Switching diode, 150mA, 200mW	SOD-323	ON Semiconductor	1N4148WS
2	J1, J2	1.5A	Rear-post jack modular connector, 120V <sub>AC</sub>	8P8C	Würth	615008140121
1	L1	0.1 $\mu$ H	I <sub>RATED</sub> = 11.5A, I <sub>SAT</sub> = 25A, RDC = 5.5m $\Omega$	SMD	Vishay	IHLP1616ABERR10M01
			I <sub>RATED</sub> = 12A, I <sub>SAT</sub> = 30A, RDC = 3.2m $\Omega$	SMD	Würth	744373240010
1	L3	2 x 470 $\mu$ H	Common filter, RDC = 2 x 65m $\Omega$	SMD	Würth	744272471
1	Q1	84m $\Omega$	N-channel MOSFET, 5.5A	SO-8	Vishay	Si4848ADY
2	R1, R3	24.9k $\Omega$	Film resistor, 1%	0603	Yageo	RC0603FR-0724K9L


**EVL8009-V-00H BILL OF MATERIALS (continued)**

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	R2	5.6kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-075K6L
1	R4	28.7Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0728R7L
2	R5A, R5B	0.12Ω	Film resistor, 1%	1206	Yageo	RC1206FR-070R12L
2	R7A, R7B	47kΩ	Film resistor, 1%	1206	Yageo	RC1206FR-0747KL
1	R8	3.3kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-073K3L
1	R9	10Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0710RL
1	R10	100Ω	Film resistor, 1%	0603	Yageo	RC0603FR-07100RL
1	R11	10Ω	Film resistor, 1%	0805	Yageo	RC0805FR-0710RL
1	R14	3kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-073KL
1	R15	8.06kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-078K06L
1	R16	1kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-071KL
8	R19, R20, R21, R22, R23, R24, R25, R26	75Ω	Film resistor, 1%	0603	Yageo	RC0603FR-0775RL
1	R27	20Ω	Film resistor, 1%	0805	Yageo	RC0805FR-0720RL
1	R40	10kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0710KL
1	R41	2.4MΩ	Film resistor, 1%	0603	Yageo	RC0603FR-072M4L
1	T1	70μH	Transformer, NS:NP:NS:NA = 9:26:9:8	EP13	Chengdu Jinzhichuan	TBSG13-460
1	T2	350μH	LAN transformer, WE-LAN series	SMD	Wurth	749020010A
1	U1	MP8009	Flyback/forward controller	QFN-28 (4mmx 5mm)	MPS	MP8009GV


## EVB TEST RESULTS

$V_{IN} = 48V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 2.1A$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.


**Efficiency vs. Load Current**  
Power supplied after rectifier bridge

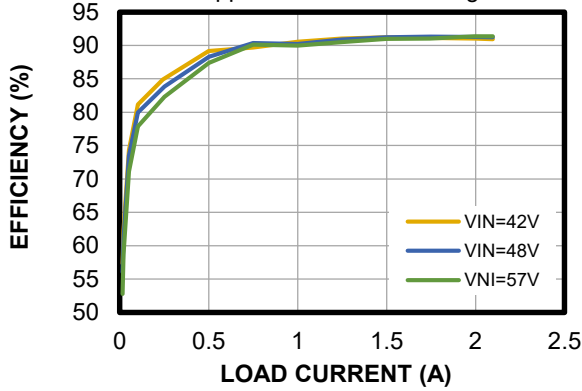

**Load Regulation**

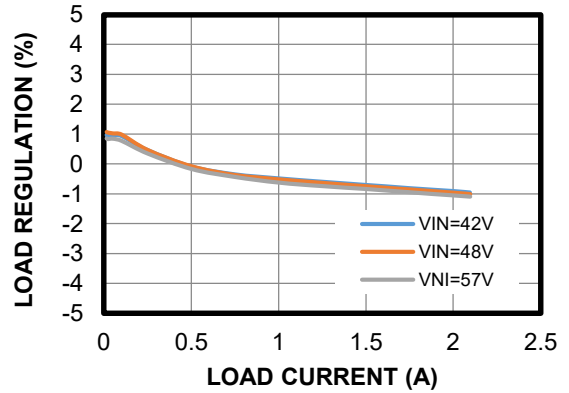


**Line Regulation**

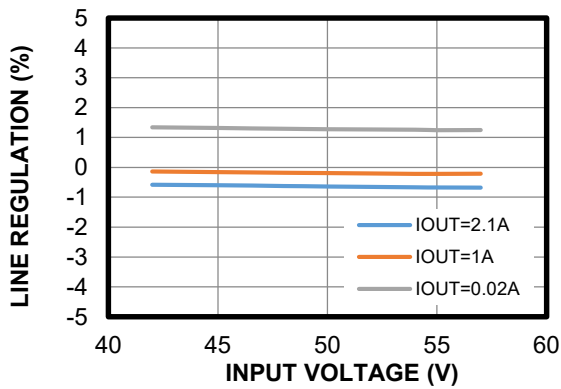


**Radiated Emissions Results**

$I_{OUT} = 2.1A$

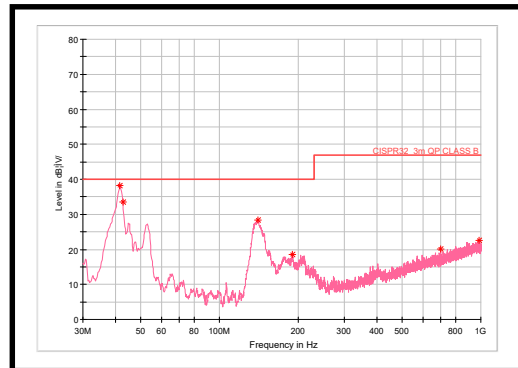

**Conducted Emissions Results**

$I_{OUT} = 2.1A$

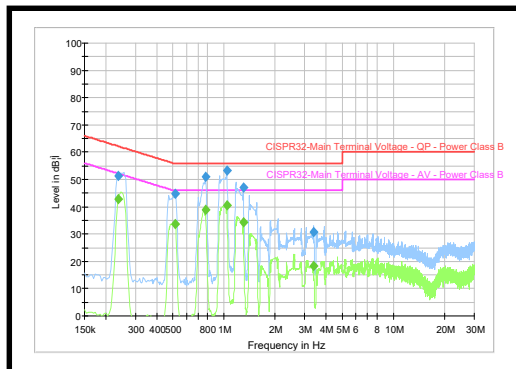


### EVB TEST RESULTS (continued)

$V_{IN} = 48V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 2.1A$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.


#### Steady State

$I_{OUT} = 30mA$

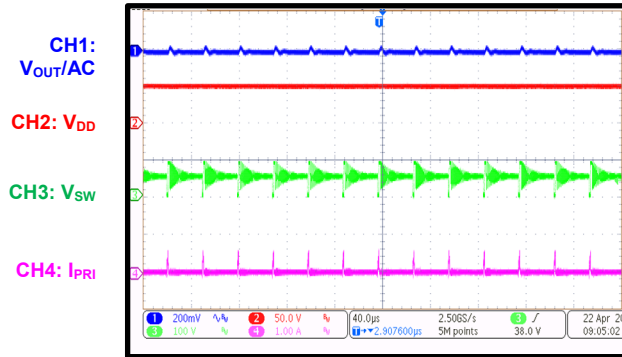


#### Steady State

$I_{OUT} = 2.1A$

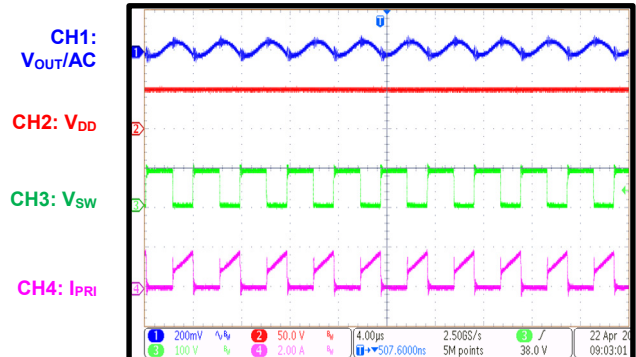


#### Start-Up through VDD

$I_{OUT} = 30mA$

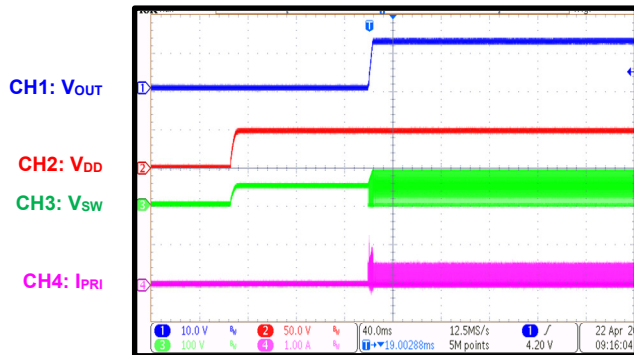


#### Start-Up through VDD

$I_{OUT} = 2.1A$

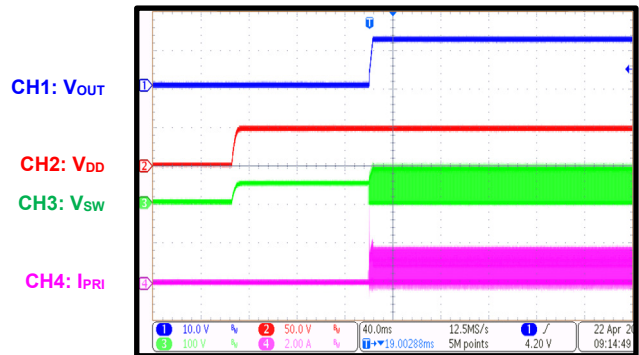


#### Shutdown through VDD

$I_{OUT} = 30mA$

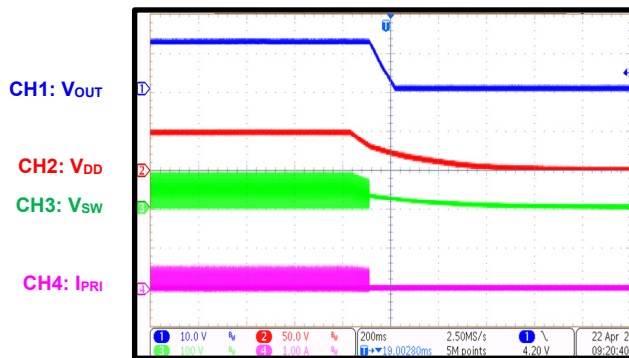

#### Shutdown through VDD

$I_{OUT} = 2.1A$

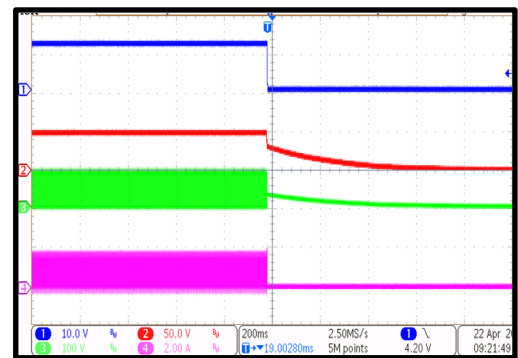




## EVB TEST RESULTS (continued)

$V_{IN} = 48V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 2.1A$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.


### SCP Entry

$I_{OUT} = 30mA$  to short

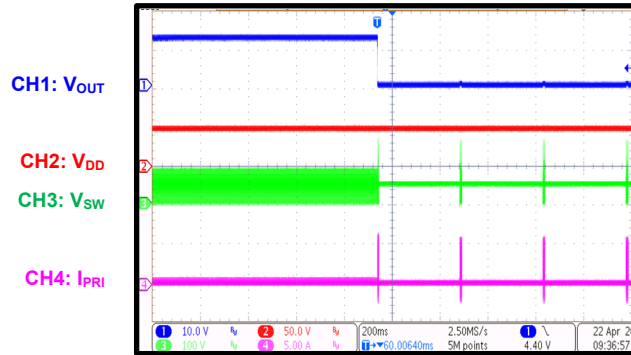


### SCP Entry

$I_{OUT} = 2.1A$  to short

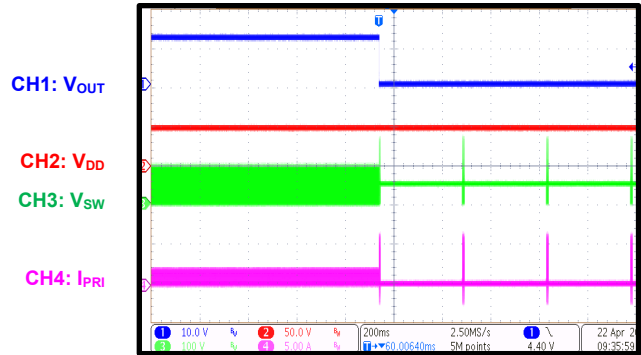


### SCP Recovery

$I_{OUT} = \text{short to } 30mA$

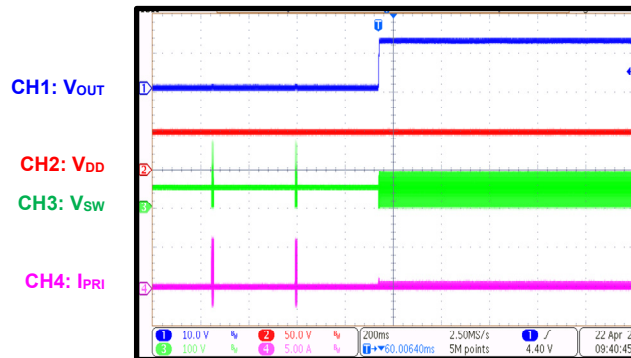


### SCP Recovery

$I_{OUT} = \text{short to } 2.1A$

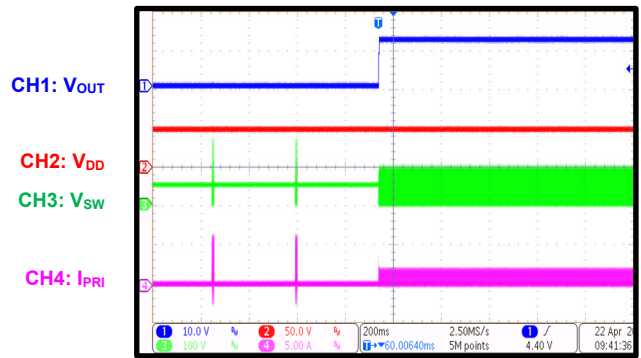


### OVP Entry

$I_{OUT} = 30mA$  to  $2mA$

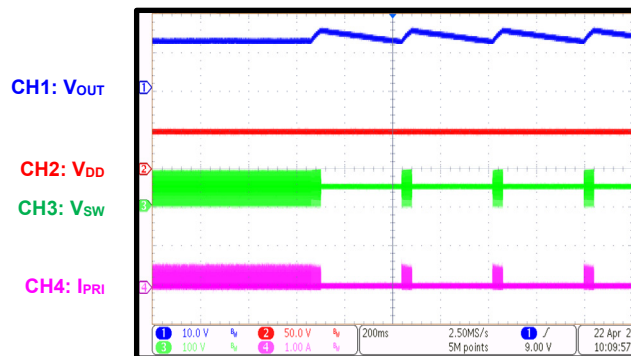

### OVP Recovery

$I_{OUT} = 2mA$  to  $30mA$

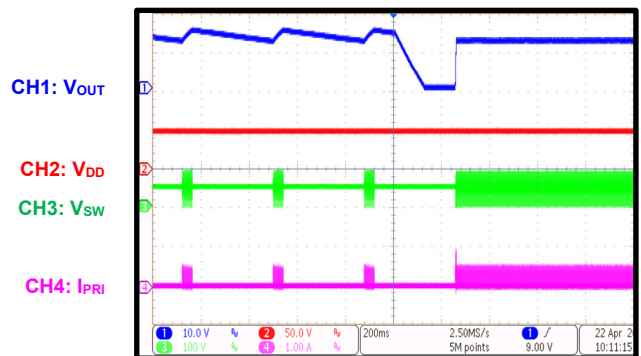


## EVB TEST RESULTS (continued)

$V_{IN} = 48V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 2.1A$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.


### Load Transient

$I_{OUT} = 30mA$  to  $1A$ ,  $I_{RAMP} = 50mA/\mu s$

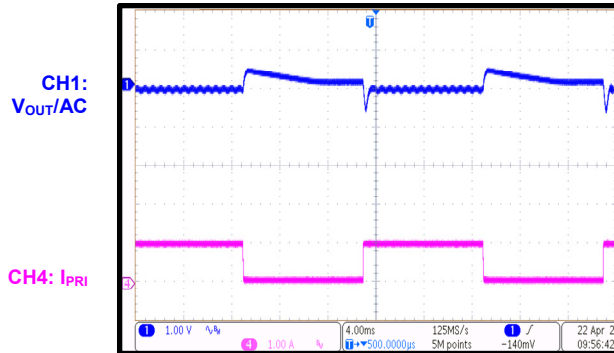


### Load Transient

$I_{OUT} = 1A$  to  $2.1A$ ,  $I_{RAMP} = 50mA/\mu s$

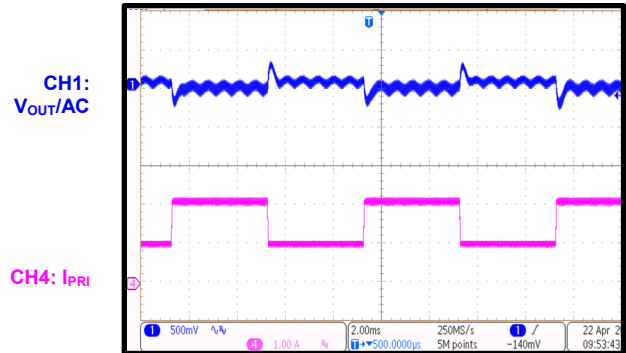

### Start-Up through PSE

$I_{OUT} = 30mA$

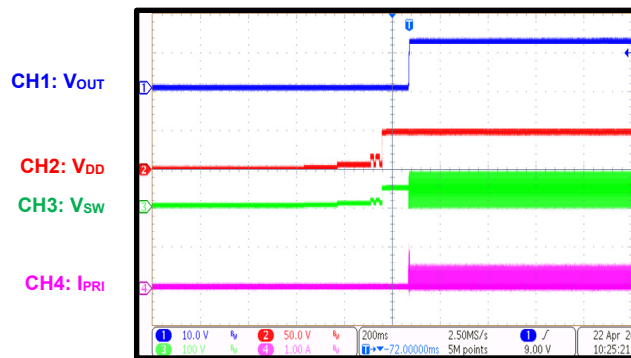

### Start-Up through PSE

$I_{OUT} = 2.1A$

