

LINDA-UP2

~165° + 130° extra wide beam for uplighting

SPECIFICATION:

Dimensions	25.4 x 1140.0 mm
Height	11.4 mm
Fastening	snaps
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
LINDA-UP2	Linear lens	PMMA	milky	

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
F17201_LINDA-UP2 » Box size: 1185 x 150 x 115 mm	70	70	70	9.9



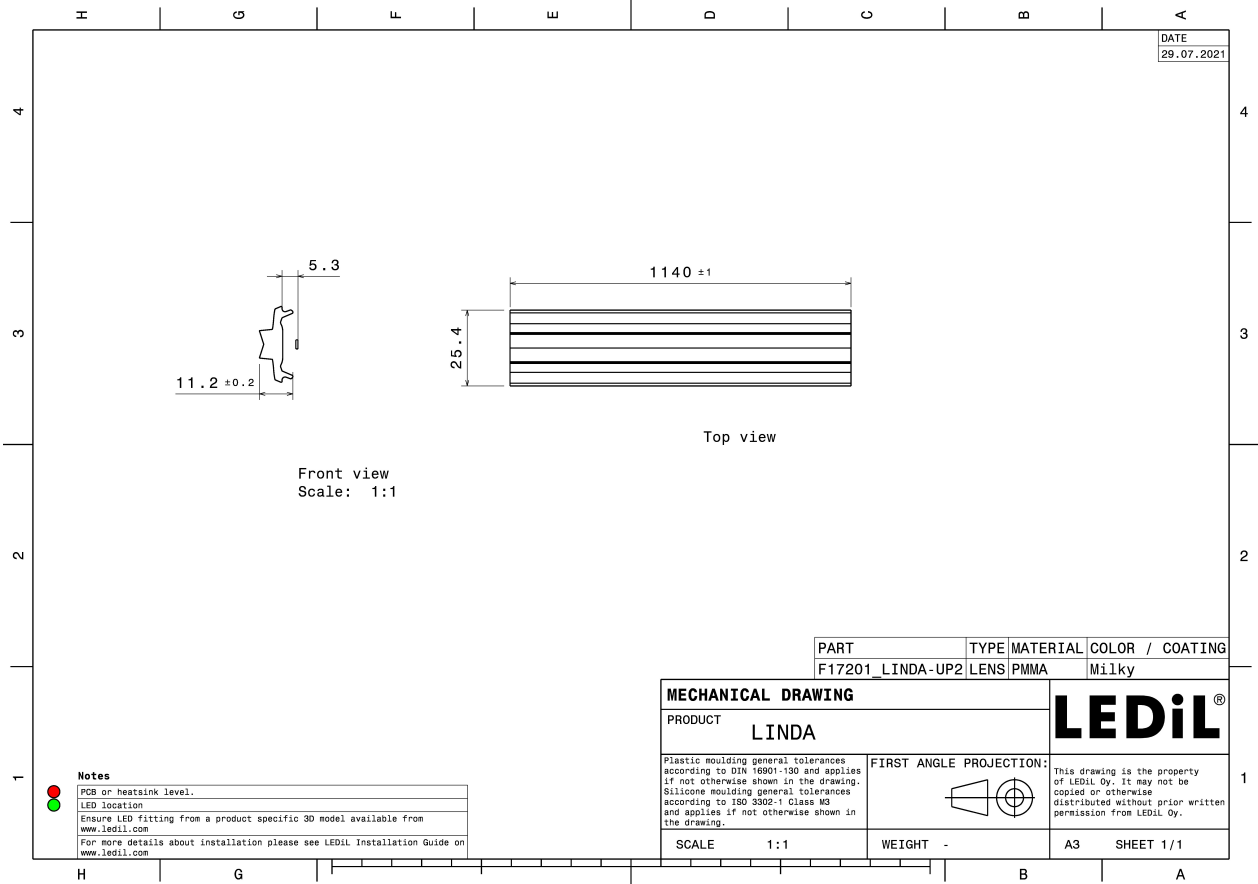


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):

CITIZEN


LED CLUC11
 FWHM / FWTM Asymmetric
 Efficiency 84 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

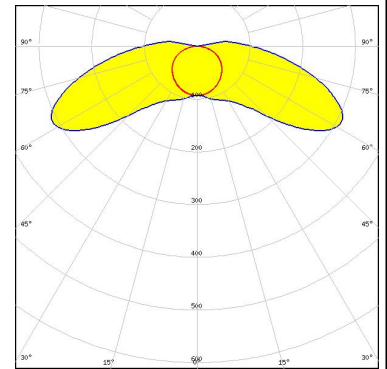


LED XP-G3
 FWHM / FWTM Asymmetric
 Efficiency 82 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

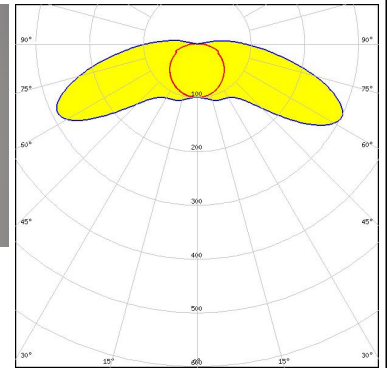





LED LUXEON 3030 2D (Round LES)
 FWHM / FWTM Asymmetric
 Efficiency 85 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

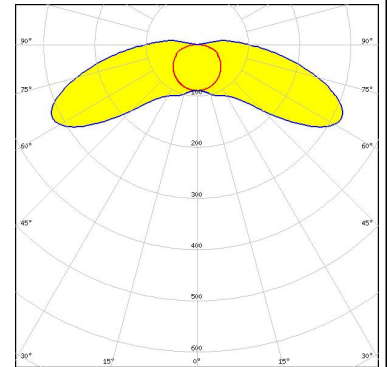

LED NF2W757G-MT (Tunable White)
 FWHM / FWTM Asymmetric
 Efficiency 86 %
 Peak intensity 0.3 cd/lm
 LEDs/each optic 1
 Light colour Tunable White
 Required components:

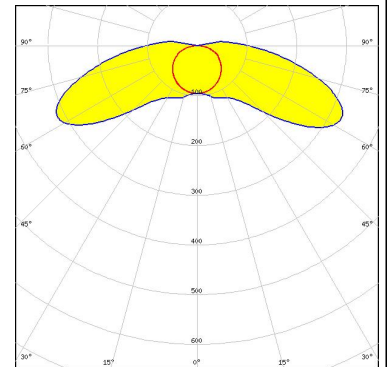


OPTICAL RESULTS (MEASURED):
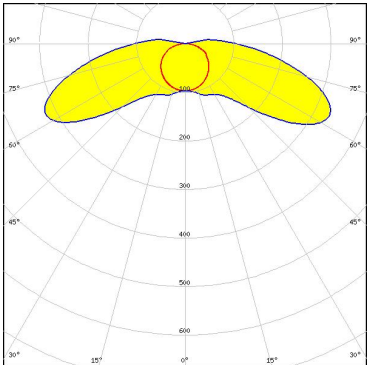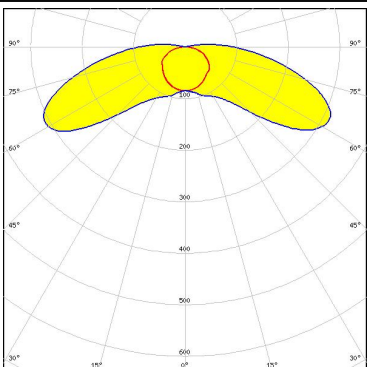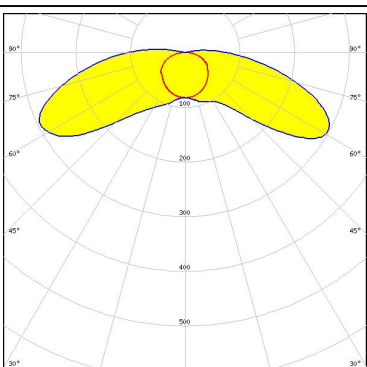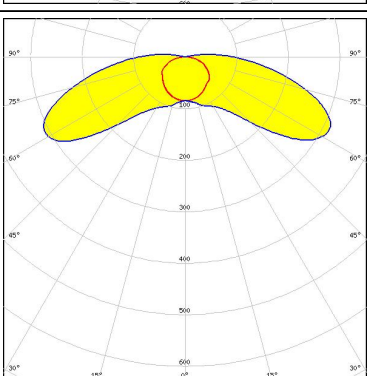
<p>NICHIA</p> <p>LED NFSW757H FWHM / FWTM Asymmetric Efficiency 87 % Peak intensity 0.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM</p> <p>LED PL-LIN-Z5 1100 280x20 FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM</p> <p>LED PL-LIN-Z5 2000 280x20 FWHM / FWTM Asymmetric Efficiency 78 % Peak intensity 0.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED Duris E 2835 FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

OPTICAL RESULTS (MEASURED):


SAMSUNG

LED LM301B
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

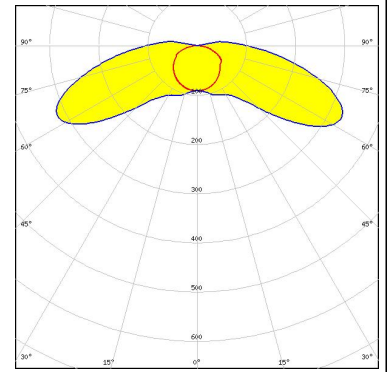


SAMSUNG

LED LM561B Plus
FWHM / FWTM Asymmetric
Efficiency 88 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:




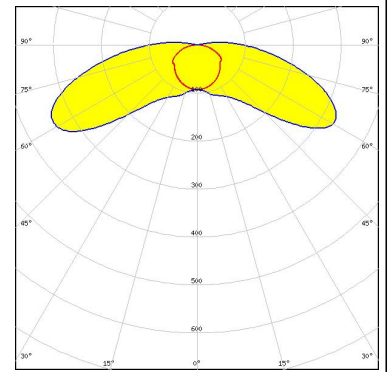


SEOUL SEMICONDUCTOR

LED SEOUL DC 3528
FWHM / FWTM Asymmetric
Efficiency 88 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

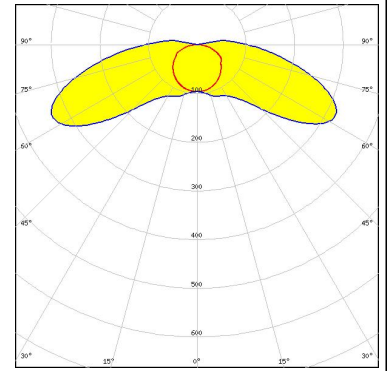

OPTICAL RESULTS (SIMULATED):
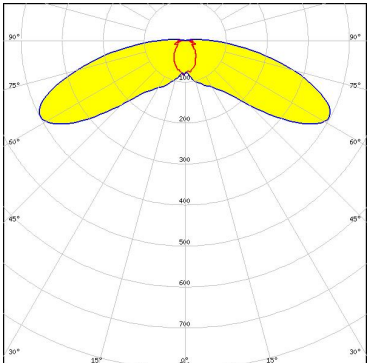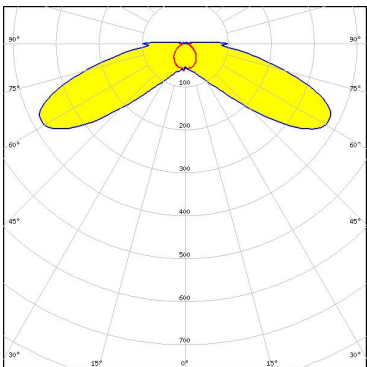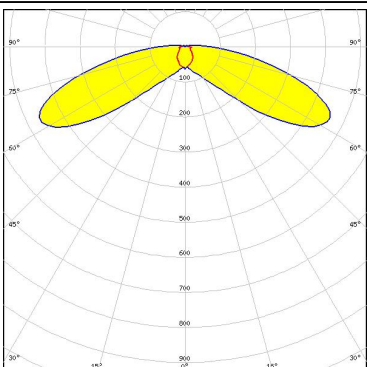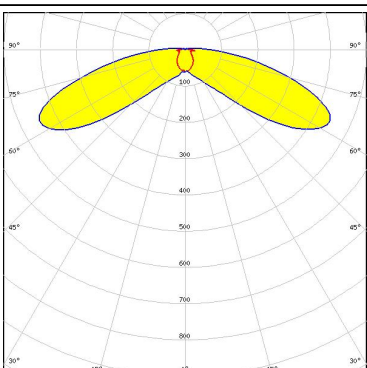
<p>bridgelux.</p> <p>LED: Bridgelux SMD 5050 FWHM / FWTM: Asymmetric Efficiency: 84 % Peak intensity: 0.4 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>NICHIA</p> <p>LED: NSSxT02A FWHM / FWTM: Asymmetric Efficiency: 85 % Peak intensity: 0.4 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>SAMSUNG</p> <p>LED: LM28xB Series FWHM / FWTM: Asymmetric Efficiency: 87 % Peak intensity: 0.5 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>SAMSUNG</p> <p>LED: LM302D FWHM / FWTM: Asymmetric Efficiency: 85 % Peak intensity: 0.4 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	

OPTICAL RESULTS (SIMULATED):

