

DAISY-MINI-M

~30° wide beam

SPECIFICATION:

Dimensions	279.5 x 21.0 mm
Height	13.3 mm
Fastening	pin, screw, snaps
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
F17029_DAISY-MINI-M	Linear lens	PMMA	clear	
F17667_DAISY-MINI-SHD-MET-MATT	Shade	PC	metal	matt
F17666_DAISY-MINI-SHD-MET	Shade	PC	metal	gloss
F17465_DAISY-MINI-SHD-WHT-MATT	Shade	PC	white	matt
F17034_DAISY-MINI-SHD-MATT	Shade	PC	black	matt
F17033_DAISY-MINI-SHD-WHT	Shade	PC	white	gloss
F17028_DAISY-MINI-SHD	Shade	PC	black	gloss


ORDERING INFORMATION:

Quantities for one set:

Linear lens	1
Shade	1

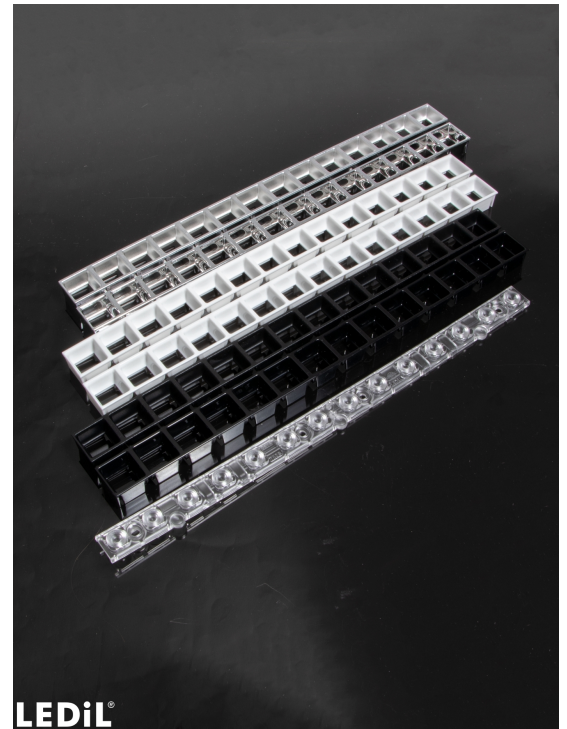

Component		Qty in box	MOQ	MPQ	Box weight (kg)
F17029_DAISY-MINI-M	Linear lens	252	252	12	5.8
» Box size: 398 x 298 x 265 mm					
F17667_DAISY-MINI-SHD-MET-MATT	Shade	252	252	4	6.2
» Box size: 398 x 298 x 265 mm					
F17034_DAISY-MINI-SHD-MATT	Shade	252	252	4	6.1
» Box size: 398 x 298 x 265 mm					
F17028_DAISY-MINI-SHD	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					
F17465_DAISY-MINI-SHD-WHT-MATT	Shade	252	252	4	6.2
» Box size: 398 x 298 x 265 mm					
F17666_DAISY-MINI-SHD-MET	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					
F17033_DAISY-MINI-SHD-WHT	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					


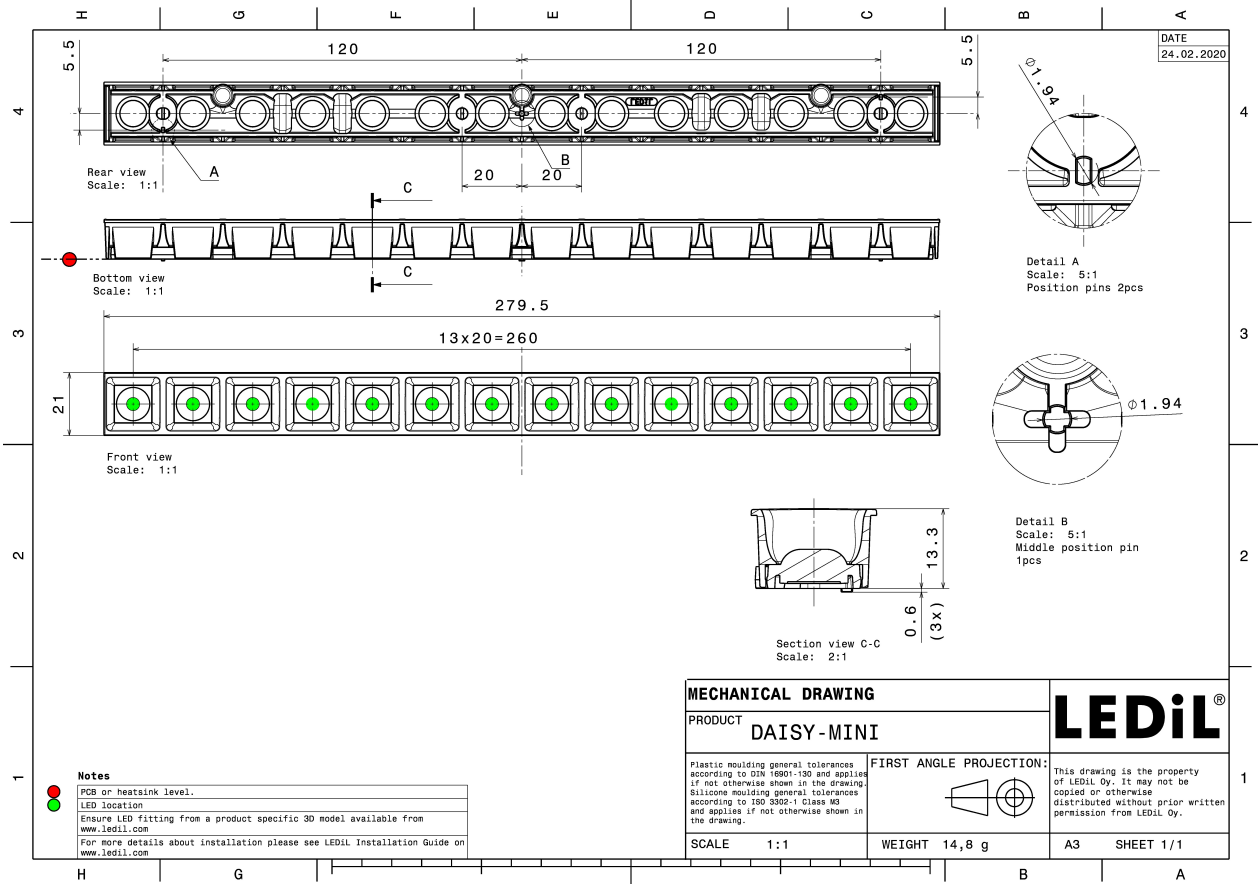


See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):




LED J Series 2835
 FWHM / FWTM 35.0° / 75.0°
 Efficiency 85 %
 Peak intensity 1.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

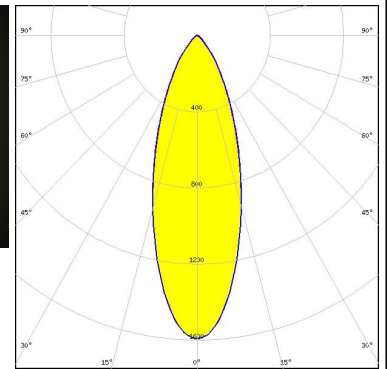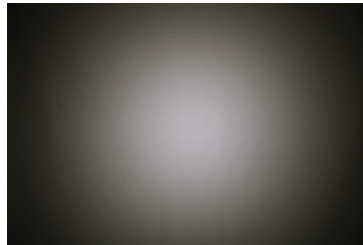

LED Opticus Daisy Mini M L28W2
 FWHM / FWTM 34.0° / 68.0°
 Efficiency 73 %
 Peak intensity 1.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

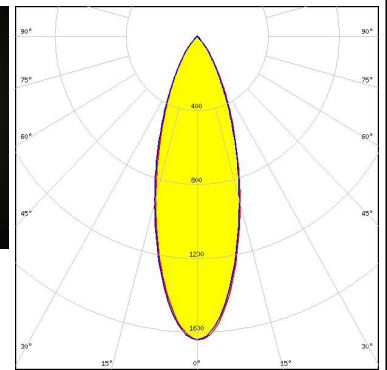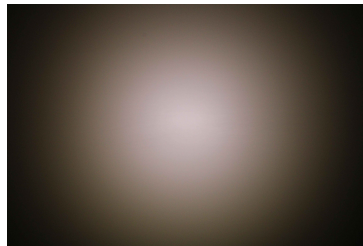


LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 58.0° / 87.0°
 Efficiency 59 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

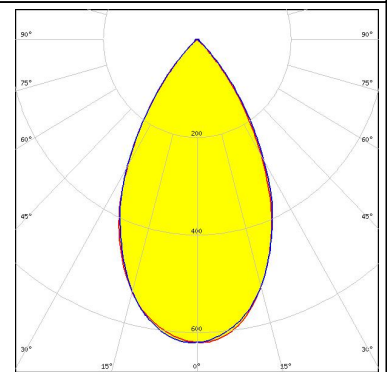


OPTICAL RESULTS (SIMULATED):




LED XQ-E HI
 FWHM / FWTM 30.0° / 72.0°
 Efficiency 80 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

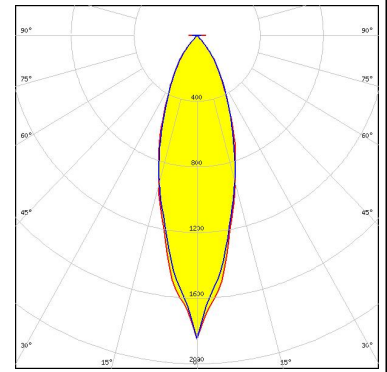


LED XQ-E HI
 FWHM / FWTM 34.0° / 75.0°
 Efficiency 88 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

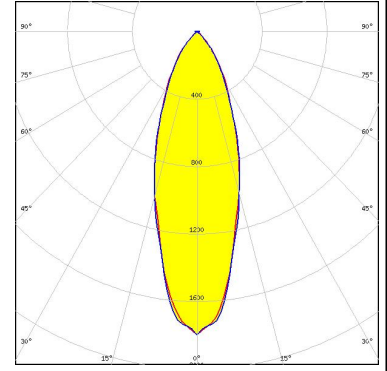

LED XQ-E HI
 FWHM / FWTM 32.0° / 72.0°
 Efficiency 78 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

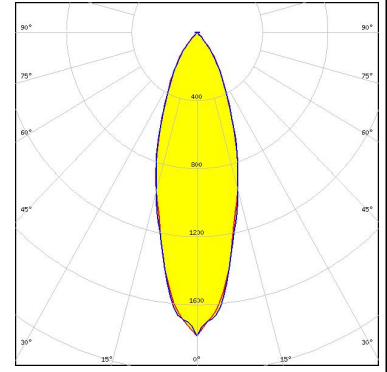

LED LUXEON HL1Z
 FWHM / FWTM 30.0° / 62.0°
 Efficiency 86 %
 Peak intensity 2.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

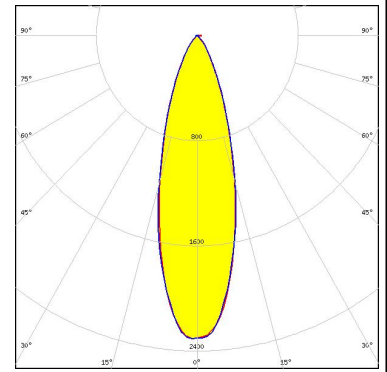


OPTICAL RESULTS (SIMULATED):

<p>NICHIA</p> <p>LED: NCSxE17A FWHM / FWTM: 30.0° / 62.0° Efficiency: 87 % Peak intensity: 2.4 cd/lm LEDs/each optic: 1 Light colour: White Required components: F17028_DAISSY-MINI-SHD</p>	
<p>NICHIA</p> <p>LED: NFSWE11A FWHM / FWTM: 34.0° / 68.0° Efficiency: 79 % Peak intensity: 1.7 cd/lm LEDs/each optic: 4 Light colour: White Required components: F17028_DAISSY-MINI-SHD</p>	
<p>NICHIA</p> <p>LED: NFSWE11A FWHM / FWTM: 26.0° / 55.0° Efficiency: 89 % Peak intensity: 3 cd/lm LEDs/each optic: 1 Light colour: White Required components: F17028_DAISSY-MINI-SHD</p>	
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED: Duris E 2835 FWHM / FWTM: 26.0° / 62.0° Efficiency: 94 % Peak intensity: 2.8 cd/lm LEDs/each optic: 1 Light colour: White Required components: F17028_DAISSY-MINI-SHD</p>	

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM28xB Series
 FWHM / FWTM 32.8° / 68.0°
 Efficiency 82 %
 Peak intensity 2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

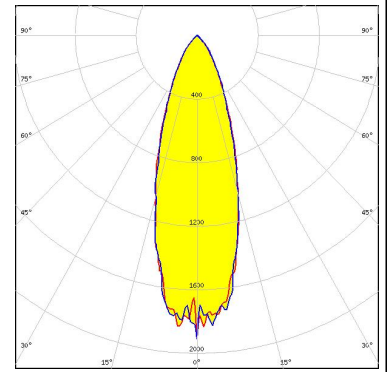


SAMSUNG

LED LM302D
 FWHM / FWTM 28.0° / 62.0°
 Efficiency 91 %
 Peak intensity 2.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

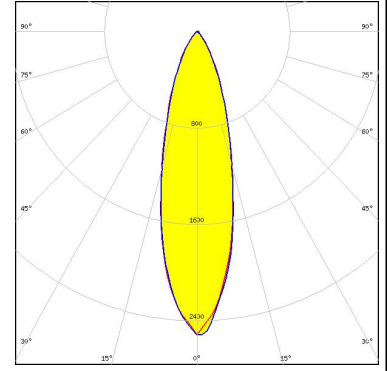

SAMSUNG

LED LM302D
 FWHM / FWTM 28.0° / 62.0°
 Efficiency 87 %
 Peak intensity 2.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

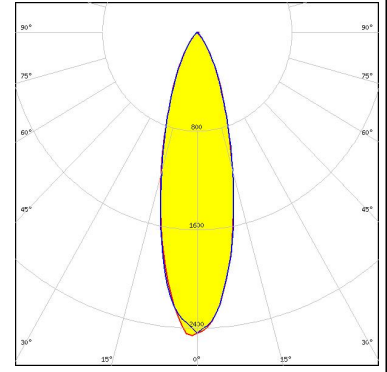

SEOUL SEMICONDUCTOR

LED SEOUL 3030
 FWHM / FWTM 26.0° / 60.0°
 Efficiency 90 %
 Peak intensity 2.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

