


High Conductance, Low Leakage Diode

FDH300 / FDH300A / FDLL300A / FDH333 / FDLL333

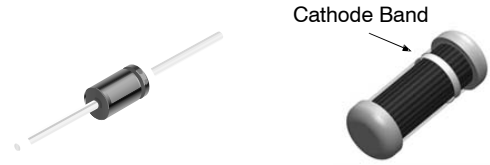

AXIAL LEAD
 (DO-35)
 CASE 017AG

MiniMELF / SOD-80
 (LL-34)
 CASE 100AD

Cathode is denoted
 with a black band

(The placement of the
 expansion gap has
 no relationship to the
 location of the cathode
 terminal)

ABSOLUTE MAXIMUM RATINGS

(T_A = 25°C unless otherwise noted) (Note 1) (Note 2)

Symbol	Parameter	Value	Units
W _{IV}	Working Inverse Voltage	125	V
I _O	Average Rectified Current	200	mA
I _F	DC Forward Current	500	mA
i _f	Recurrent Peak Forward Current	600	mA
I _{FSM}	Non-Repetitive Peak Forward Surge Current		A
	Pulse Width = 1.0 s	1.0	
	Pulse Width = 1.0 μs	4.0	
T _{STG}	Storage Temperature Range	-65 to +200	°C
T _J	Operating Junction Temperature	175	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. These ratings are based on a maximum junction temperature of 175°C.
2. These are steady-state limits. onsemi should be consulted on applications involving pulsed or low-duty-cycle operations.

THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Units
P _D	Total Device Dissipation	500	mW
	Derate Above 25°C	3.33	mW/°C
R _{θJA}	Thermal Resistance, Junction to Ambient	300	°C

MARKING DIAGRAM

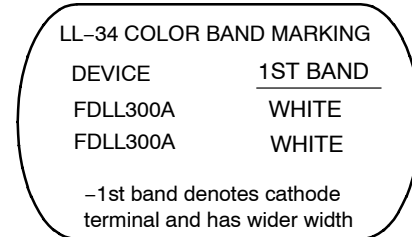

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 2 of this data sheet.

FDH300 / FDH300A / FDLL300A / FDH333 / FDLL333

ELECTRICAL CHARACTERISTICS (Values are at $T_A = 25^\circ\text{C}$ unless otherwise noted.)

Symbol	Parameter		Condition	Min	Max	Unit
V_R	Breakdown Voltage		$I_R = 100 \mu\text{A}$	150	-	V
V_F	Forward Voltage	FDH300 / FDH300A / FDLL300A	$I_F = 1.0 \text{ mA}$	-	680	mV
		FDH300	$I_F = 5.0 \text{ mA}$	-	750	mV
		FDH300A / FDLL300A	$I_F = 5.0 \text{ mA}$	-	760	mV
		FDH300 / FDH300A / FDLL300A	$I_F = 10 \text{ mA}$	-	800	mV
		FDH300	$I_F = 50 \text{ mA}$	-	880	mV
		FDH300A / FDLL300A	$I_F = 50 \text{ mA}$	-	890	mV
		FDH300 / FDH300A / FDLL300A	$I_F = 100 \text{ mA}$	-	920	mV
		FDH300 / FDH300A / FDLL300A	$I_F = 200 \text{ mA}$	-	1.0	V
		FDH333 / FDLL333	$I_F = 50 \text{ mA}$	800	890	mV
			$I_F = 100 \text{ mA}$	830	940	mV
			$I_F = 150 \text{ mA}$	860	970	mV
$I_F = 200 \text{ mA}$	0.87		1.05	V		
I_R	Reverse Current	FDH300 / FDH300A / FDLL300A	$V_R = 125 \text{ V}$	-	1.0	nA
			$V_R = 125 \text{ V}, T_A = 150^\circ\text{C}$	-	3.0	μA
		FDH333 / FDLL333	$V_R = 125 \text{ V}$	-	3.0	nA
			$V_R = 125 \text{ V}, T_A = 100^\circ\text{C}$	-	500	nA
			$V_R = 0, f = 1.0 \text{ MHz}$	-	6.0	pF
C_O	Diode Capacitance		$V_R = 0, f = 1.0 \text{ MHz}$	-	6.0	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


DEVICE ORDERING INFORMATION

Part Number	Top Mark	Package	Shipping [†]
FDH300TR	H300	DO-204AH (DO-35)	Tape and Reel
FDH300A	H300A	DO-204AH (DO-35)	Bulk
FDH300ATR	H300A	DO-204AH (DO-35)	Tape and Reel
FDH333	H333	DO-204AH (DO-35)	Bulk
FDH333TR	H333	DO-204AH (DO-35)	Tape and Reel
FDLL300A	WHITE	SOD-80 2L	Tape and Reel
FDLL333	WHITE	SOD-80 2L	Tape and Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).


AXIAL LEAD
CASE 017AG
ISSUE 0

DATE 31 AUG 2016

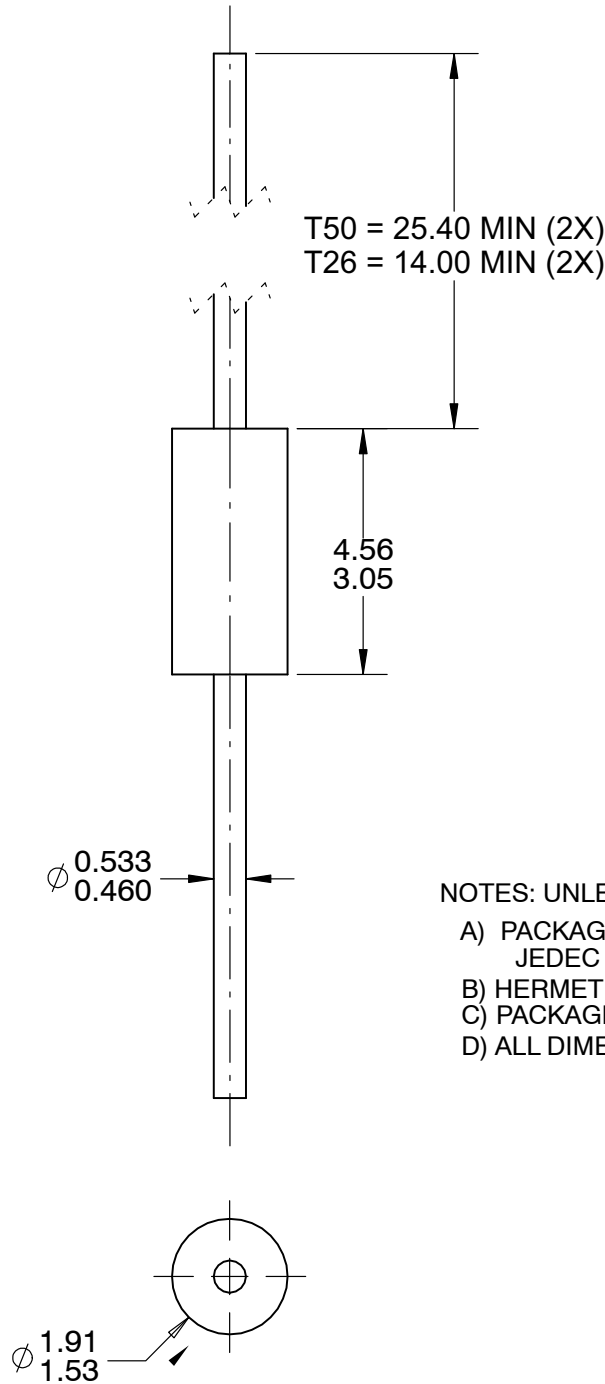

- NOTES: UNLESS OTHERWISE SPECIFIED
- A) PACKAGE STANDARD REFERENCE: JEDEC DO-204, VARIATION AH.
 - B) HERMETICALLY SEALED GLASS PACKAGE.
 - C) PACKAGE WEIGHT IS 0.137 GRAM.
 - D) ALL DIMENSIONS ARE IN MILLIMETERS.

DOCUMENT NUMBER:	98AON13443G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	AXIAL LEAD	PAGE 1 OF 1


ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS




MiniMELF / SOD-80
CASE 100AD
ISSUE O

DATE 30 APR 2012

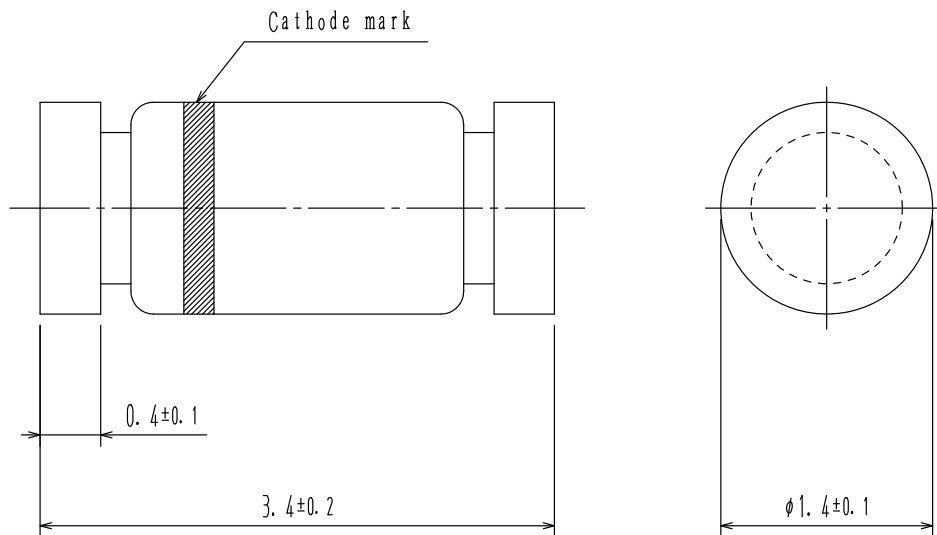

NOTES: UNLESS OTHERWISE SPECIFIED

- A) PACKAGE STANDARD REFERENCE:
JEDEC DO-213, VARIATION AC.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C)  CORNER RADIUS IS OPTIONAL.
- D) DRAWING FILE NAME: SOD80A REV01

DOCUMENT NUMBER:	98AON79582E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	MINIMELF / SOD-80	PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.