

FLEXI-BNC90-433

Features

- 1/4 Wavelength Whip Antenna
- Rugged Flexible Plastic Finish.
- Available as BNC, SMA-Plug, M4 Screw Fixing
- Omni-Directional Design
- 50ohm Impedance
- Operating Temp -30 to +60°C
- Insulation resistance 500MΩ @500Vdc



Applications

- General Low Power Radio
- M2M Applications
- Telemetry

Description

A rugged 1/4 length wave length antenna for 433MHz applications. This ready to operate antenna requires no tuning and provides optimum range and reliability to your application.

Ordering Information

Part No	Description
FLEXI-BNC90-433	1/4 Wave, 433MHz, BNC 90 degree Connector

FLEXI-BNC90-433




Performance / VSWR Plot


12 Mar 2009 14:21:49

CH1 LOG 10 dB/ REF 0 dB
S11 3=-11.462 dB 443.000 000 MHz

CH2 S11 1 U FS
3= 31.276 \angle -11.429 \angle 31.435 pF
443.000 000 MHz

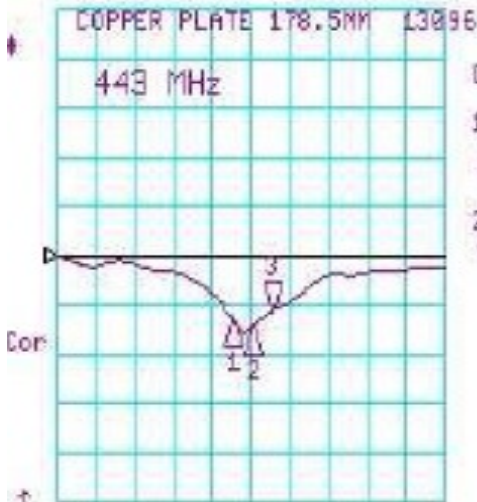

CH1 Markers
1: -12.536 dB
423.000 MHz
2: -14.748 dB
433.000 MHz

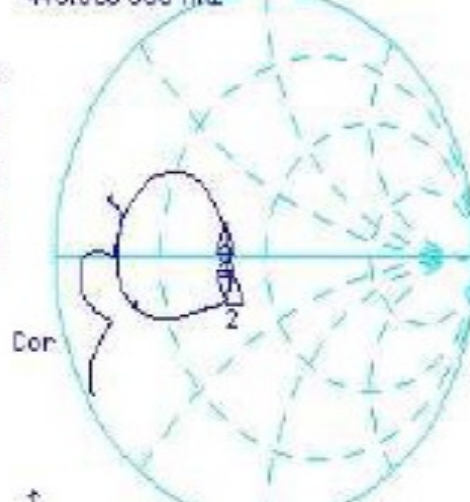


CH2 Markers
1: 32.285 \angle
8.2188 \angle
423.000 MHz
2: 35.305 \angle
-5.3738 \angle
433.000 MHz

CENTR 433.000 MHz SPAN 200.000 MHz

START 333.000 MHz STOP 533.000 MHz

CH3 S11 SWR 1 / REF 1 3= 1.7294 443.000 000 MHz

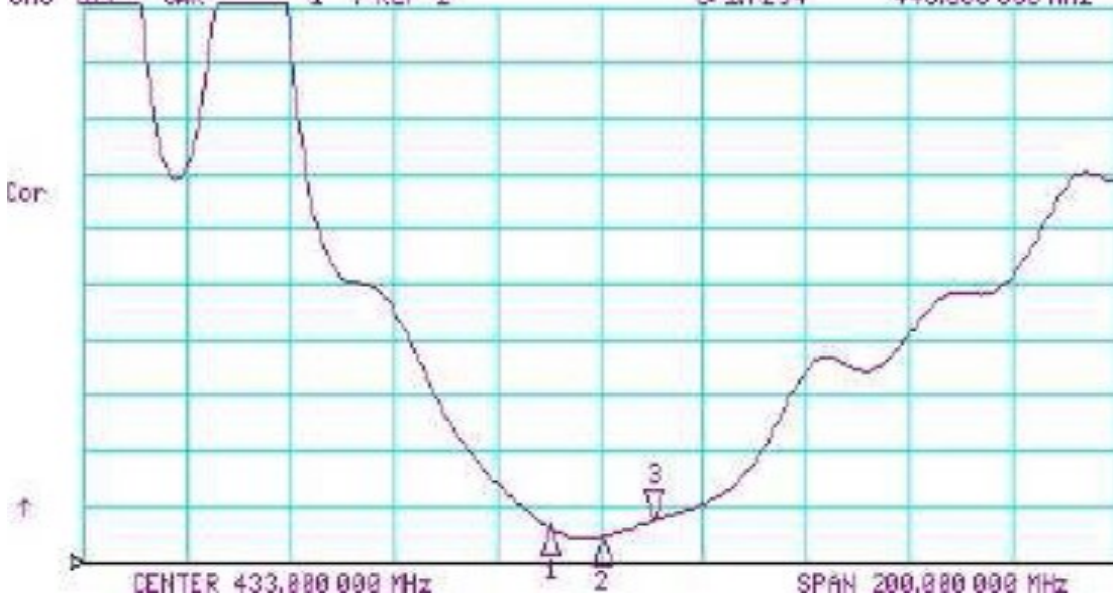

CH3 Markers
1: 1.6183
423.000 MHz
2: 1.4481
433.000 MHz

CENTER 433.000 000 MHz

SPAN 200.000 000 MHz