

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 to 40 Volts CURRENT 1.0 Ampere

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Metallurgically bonded construction
- * Mounting position: Any
- * Weight: 0.057 gram

MECHANICAL DATA

- * Epoxy: Device has UL flammability classification 94V-O

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



DO-214AC

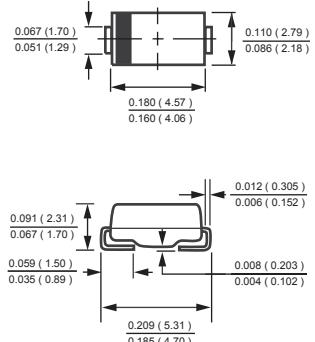

Dimensions in inches and (millimeters)

MAXIMUM RATINGS (@ TA=25 °C unless otherwise noted)

| RATINGS | SYMBOL | FM5817 | FM5818 | FM5819 | UNITS |
|---|------------------|--------|--------------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 20 | 30 | 40 | Volts |
| Maximum RMS Voltage | V _{RMS} | 14 | 21 | 28 | Volts |
| Maximum DC Blocking Voltage | V _{DC} | 20 | 30 | 40 | Volts |
| Maximum Average Forward Rectified Current at T _A = 90°C | I _O | | 1.0 | | Amps |
| Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | I _{FSM} | | 25 | | Amps |
| Typical Thermal Resistance (Note 3) | R _{θJA} | | 88 | | °C/W |
| | R _{θJL} | | 28 | | |
| Typical Junction Capacitance (Note 1) | C _J | | 110 | | pF |
| Operating Temperature Range | T _J | | 150 | | °C |
| Storage Temperature Range | T _{STG} | | -55 to + 150 | | °C |

ELECTRICAL CHARACTERISTICS(@TA=25 °C unless otherwise noted)

| CHARACTERISTICS | SYMBOL | FM5817 | FM5818 | FM5819 | UNITS |
|--|----------------|--------|--------|--------|-------|
| Maximum Instantaneous Forward Voltage at 1.0A DC | V _F | .45 | .55 | .60 | Volts |
| Maximum Instantaneous Forward Voltage at 3.1A DC | V _F | .75 | .875 | .90 | Volts |
| Maximum Average Reverse Current @T _A = 25°C at Rated DC Blocking Voltage | I _R | | 0.2 | | mAmps |
| | | | 10 | | mAmps |

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

2006-11

2. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

3. Thermal Resistance : Mounted on PCB.

4. Also available in DO-214AA (SMB).

RATING AND CHARACTERISTICS CURVES (FM5817 THRU FM5819)

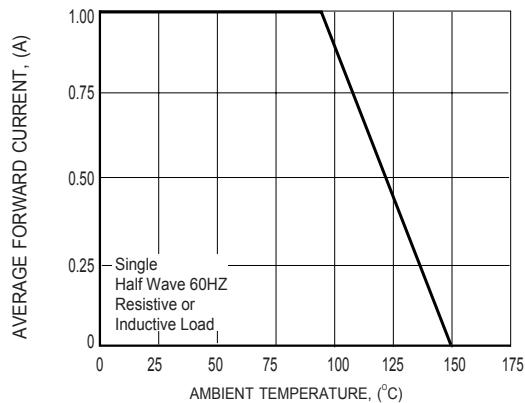


FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE

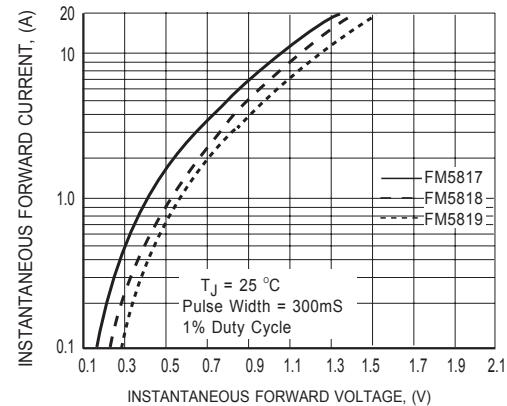


FIG.2 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

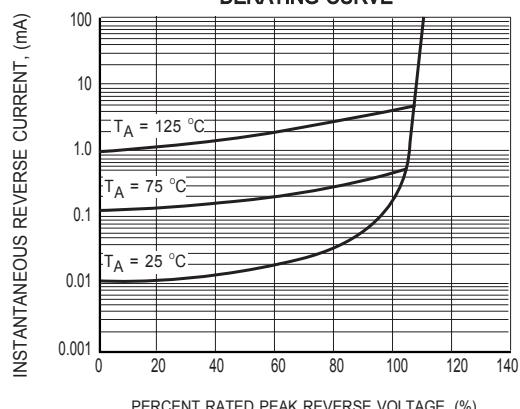


FIG.3 TYPICAL REVERSE CHARACTERISTICS

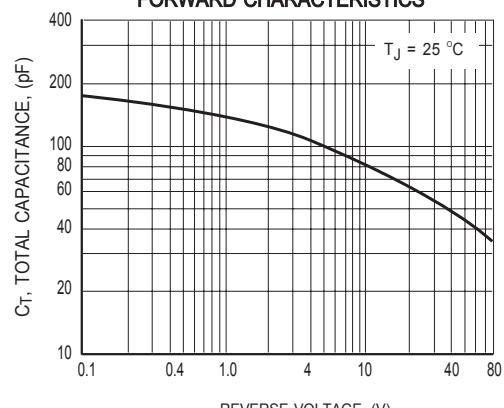


FIG.4 TYPICAL JUNCTION CAPACITANCE


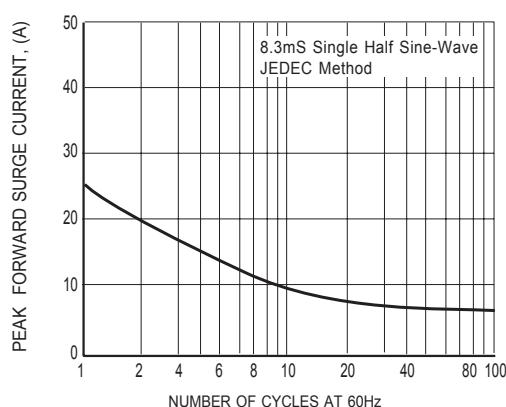


FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

Mounting Pad Layout

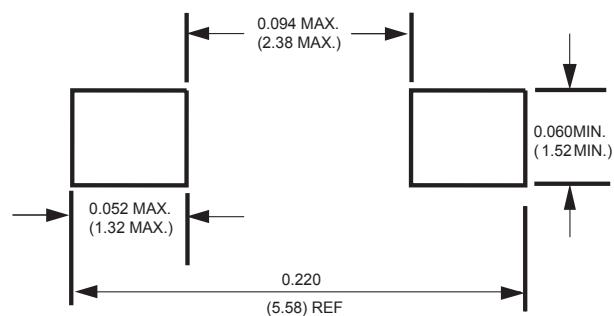

Dimensions in inches and (millimeters)