



Low Profile - High performance, EMC/EMI IEC inlet filter



- Excellent IEC inlet for robotics, datacenters and other applications
- Terminals available on load side: Fast-on, wire leads, bolt, and clamps
- Voltage rating up to 250 VAC
- Fits within 1 height unit (HU) of a 19" rack application
- 40°C operating temperature
- 2-stage filter performance



Performance indicators

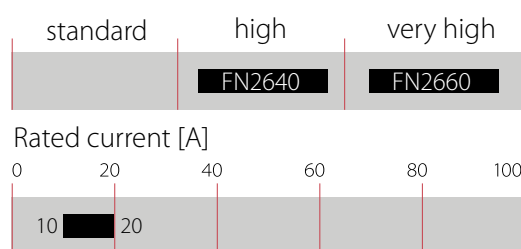

Technical Specifications

Rated operating voltage	250 VAC
Operating frequency	DC to 60 Hz
Rated currents	10 to 20 A @ 40°C
Overload capability	1.5 x rated current for 1 minute once per hour
Cooling	Natural cooling AN
Climatic category	40/085/21 acc. IEC60068-1
Flammability corresponding to	Plastic Material: UL 94 V0 Laces for -07 version: UL 94 VW1
Surge withstand	2 kV Ph-Ph / 4 kV Ph-PE (Level 4)
High potential test voltage	P → N 1500 VDC for 2 sec* P/N → PE 2500 VDC for 2 sec*
Altitude	Derating above 2000 m
Certified to	UL 60939-3, IEC/EN 60939, GB/T 15287
MTBF	> 300,000 h
Protection category	IP00 / IP20 for -103 terminal
Protection category	2 acc. IEC 60664-1
Vibration and shock	3M12 acc. IEC 60721-3-3
Overvoltage category	II acc. IEC 60664-1
Temperature range (operation and storage)	-40°C to +85°C (with derating >40°C)

* High potential test voltage: Repetition with max. 80% of specified values

Approvals & Compliances


Features and Benefits

- FN2640 / FN2660 series fits perfectly within 1HU height for rack mount applications
- The filters are built to fit perfectly to datacenter and audio video equipment
- The shape allows convenient and space-saving installation
- Fulfills the requirements in IEC/EN 62040-1 - Uninterruptible power systems (UPS)
- Fulfills the requirements in IEC 62368-1 - Audio/Video, Information and Communication Technology Equipment
- Fulfills the requirements in IEC/EN 60335-1 - Household and similar appliances






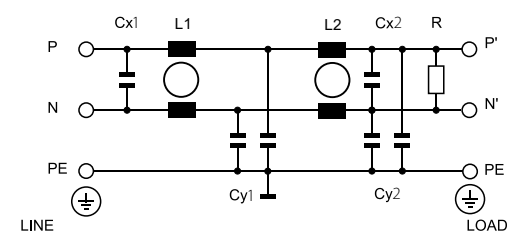


Typical Applications

- Robotics, collaborative robots, autonomous machines
- Audio and video equipment
- UPS - Uninterruptible power supplies

Typical electrical schematic



Filter Selection Table

Filter	Rated current	Leakage current*	Power loss	Inductance**		Capacitance**				Resistance**	Connections				Weight max***	
	@ 40°C	@ 250 VAC/ 50 Hz (@ 120 VAC/ 60 Hz)	@ 25°C	L1	L2	Cx1	Cx2	Cy1	Cy2	R	line side	load side				
	[A]	[mA]	[W]	[mH]	[mH]	[µF]	[µF]	[nF]	[nF]	[kΩ]	C14 C20					[kg]
Two-stage																
FN2660-10-yy-C0909	10	0.35 (0.20)	8.2	8.3	8.3	1	0.47	2.2	2.2	680		-05	-07	-08	-103	0.5
FN2660-15-yy-C0909	15	0.35 (0.20)	8.2	4.0	4.0	1	0.47	2.2	2.2	680		-05	-07	-08	-103	0.5
FN2660-16-yy-C0909	16	0.35 (0.20)	9.4	4.0	4.0	1	0.47	2.2	2.2	680		-05	-07	-08	-103	0.5
FN2660-20-yy-C0909	20	0.35 (0.20)	10.6	2.4	2.4	1	0.47	2.2	2.2	680		-05	-07	-08	-103	0.5


* Maximum leakage current under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage current could reach twice this level.

** Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%.

*** Weight depending on choice of connectors.

Product selector

FN2660-xx-yy-C0909



yy – Load terminal type

05: fast-on 6.3 x 0.8 mm

07: wire leads

08: M4 screw

103: push-in terminal


xx – Rated current

10-20: 10 A – 20 A


Typical Filter Attenuation

Per CISPR 17: symmetrical 50 Ω/50 Ω -> Differential Mode (DM); asymmetrical 50 Ω/50 Ω -> Common Mode (CM)


FN2660 - Two-stage filter

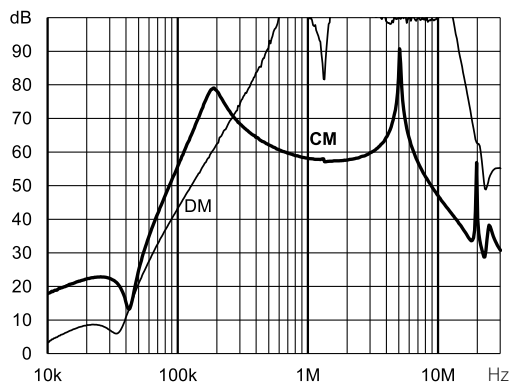

FN2660-10-yy-C0909

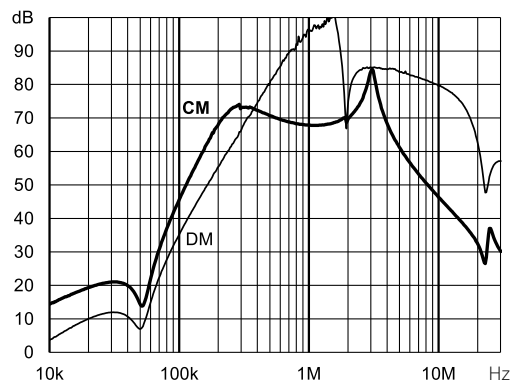


FN2660-15-yy-C0909 & FN2660-16-yy-C0909

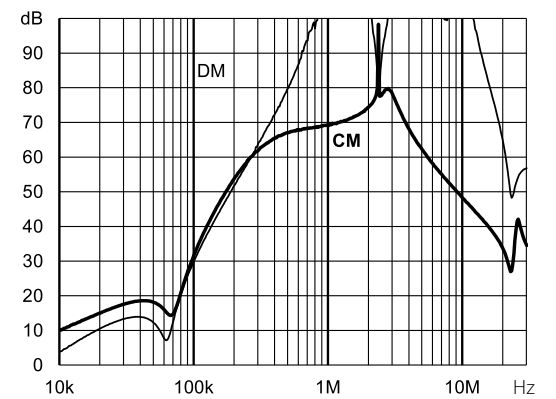

FN2660-20-yy-C0909

Dimensions FN2660 - Two-stage Filter

For dimensions [mm] without tolerances: ISO2768-cL/EN22768-cL applies

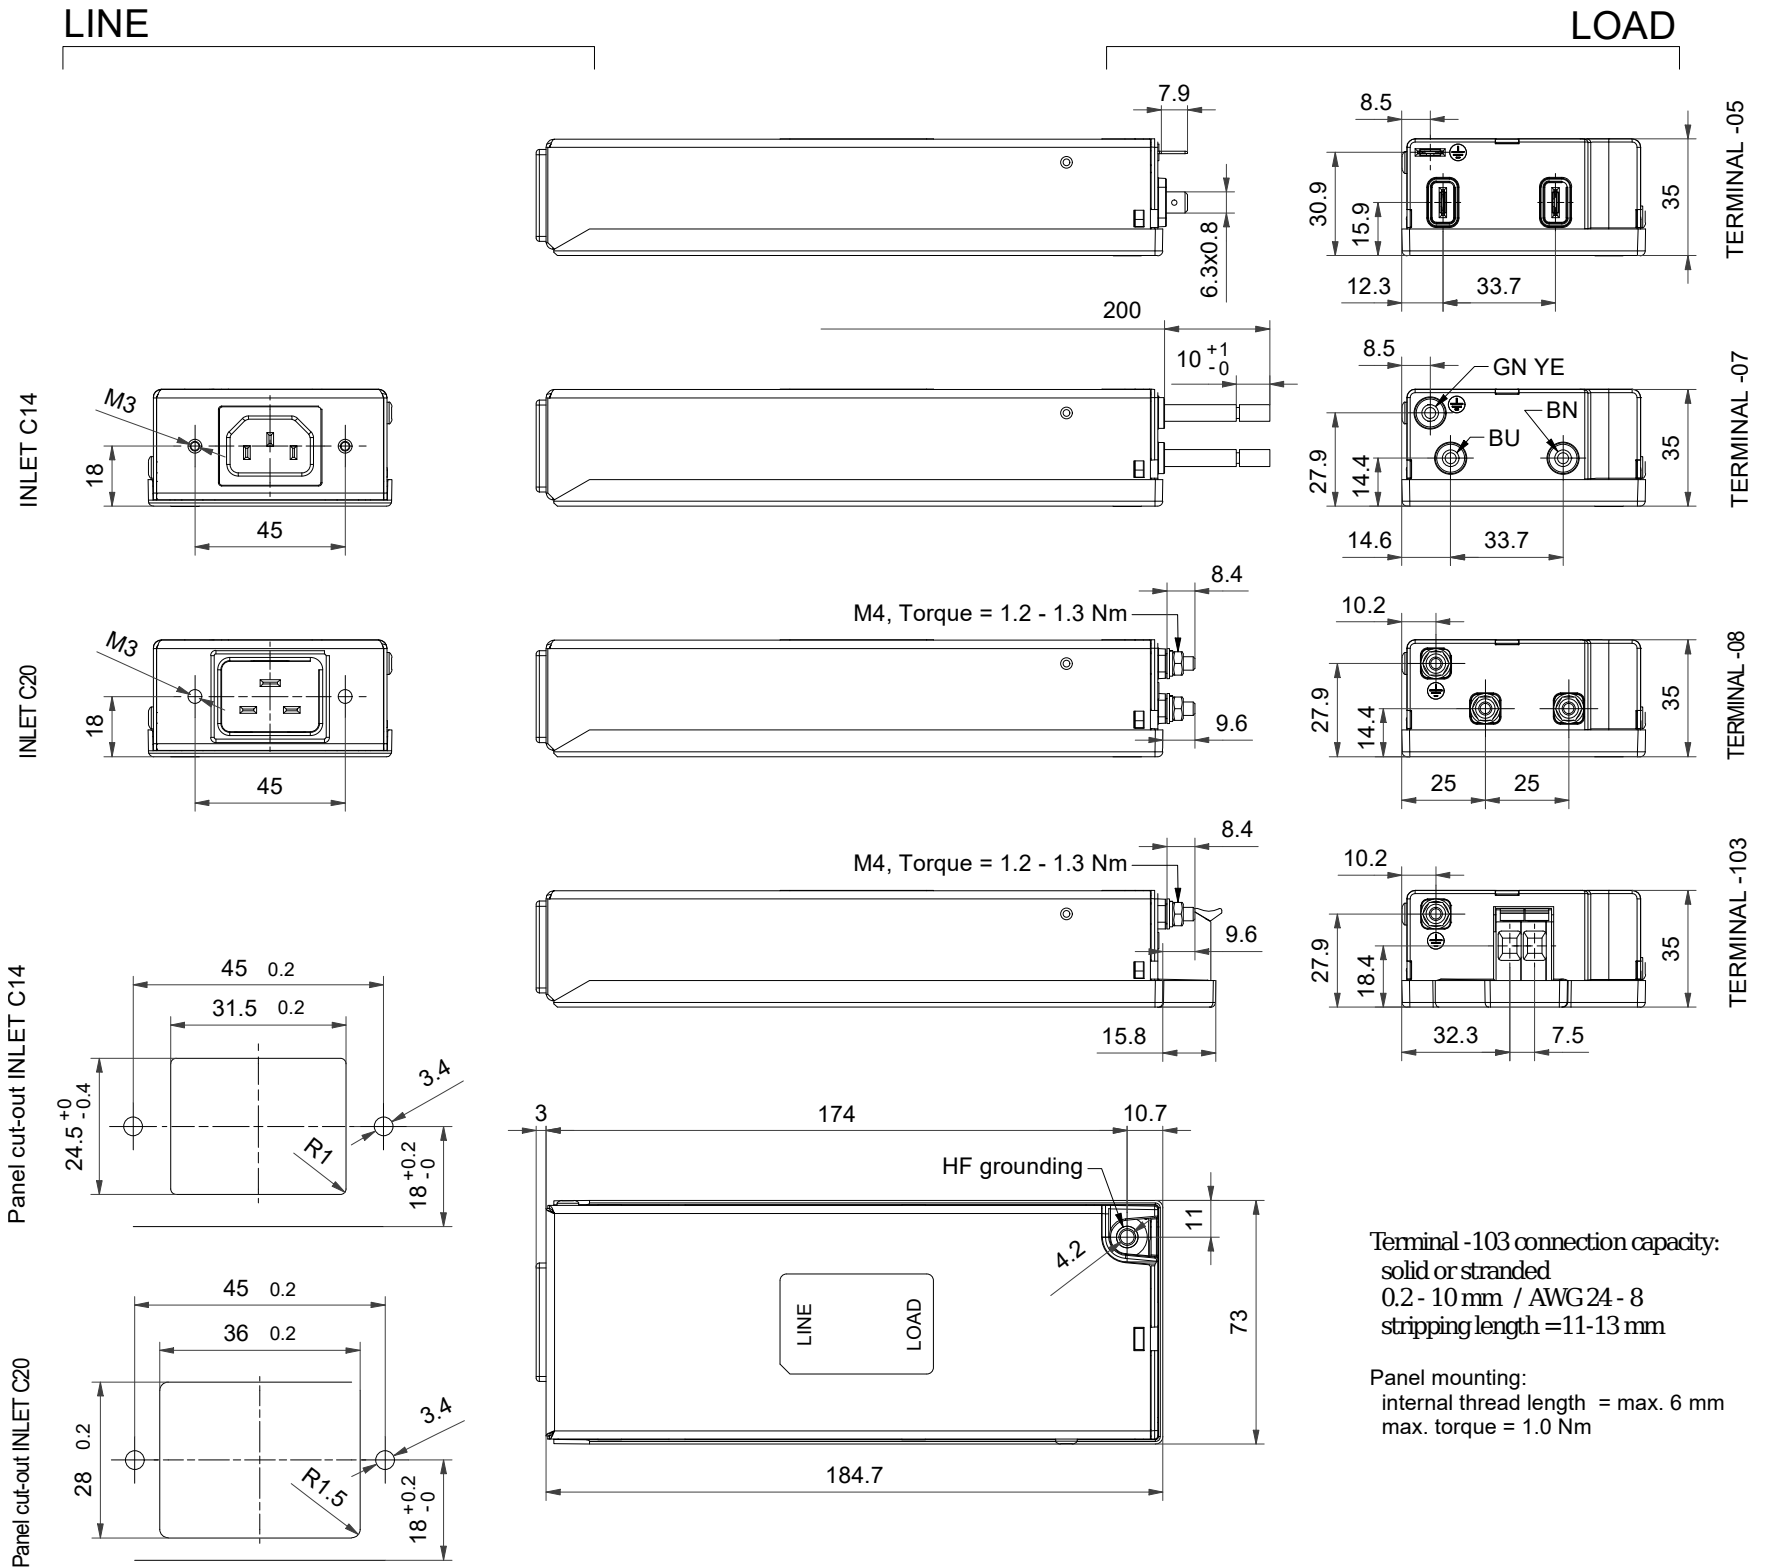

Terminal -103 connection capacity:
solid or stranded
0.2 - 10 mm / AWG 24 - 8
stripping length = 11-13 mm

Panel mounting:
internal thread length = max. 6 mm
max. torque = 1.0 Nm