


HCLA Series

Miniature amplified low pressure sensors

FEATURES

- 0 ... 2.5 to 0 ... 75 mbar, 0 ... ± 2.5 to 0 ... ± 75 mbar, differential or gage
- Output: 0.25...4.25 V and I²C-bus (SPI and switching outputs optional)
- Precision ASIC conditioning
- Calibrated and temperature compensated
- Matched pressure port volumes
- Miniature SMT and SIL housings
- RoHS compliant

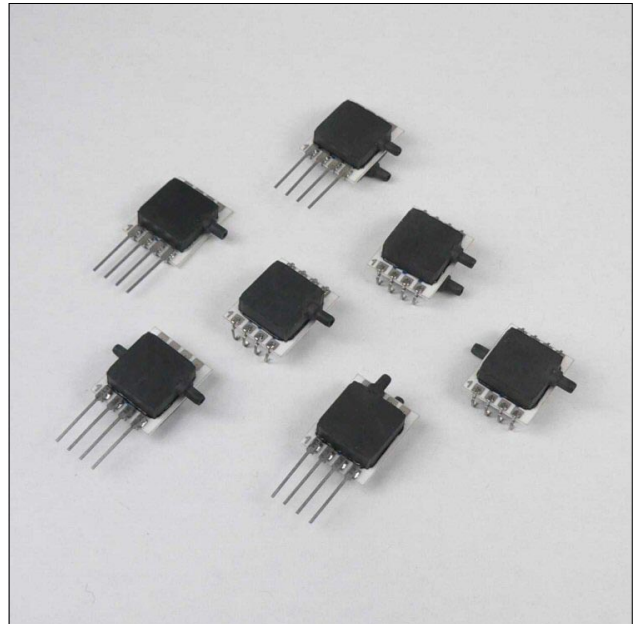

SPECIFICATIONS

Maximum ratings

Supply voltage V_s 4.5 V ... 5.5 V_{DC}
(optional 2.7 ... 3.3 V_{DC})

Output current
Sink 1 mA
Source 1 mA

Lead specifications


Average preheating temperature gradient 2.5 K/s
Soak time ca. 3 min
Time above 217°C 50 s
Time above 230°C 40 s
Time above 250°C 15 s
Peak temperature 260°C
Cooling temperature gradient -3.5 K/s

Temperature ranges

Compensated -25 ... 85°C
Operating -25 ... 85°C
Storage -40 ... 125°C

Humidity limits (non-condensing) 0 ... 95 %RH

ELECTRICAL CONNECTION

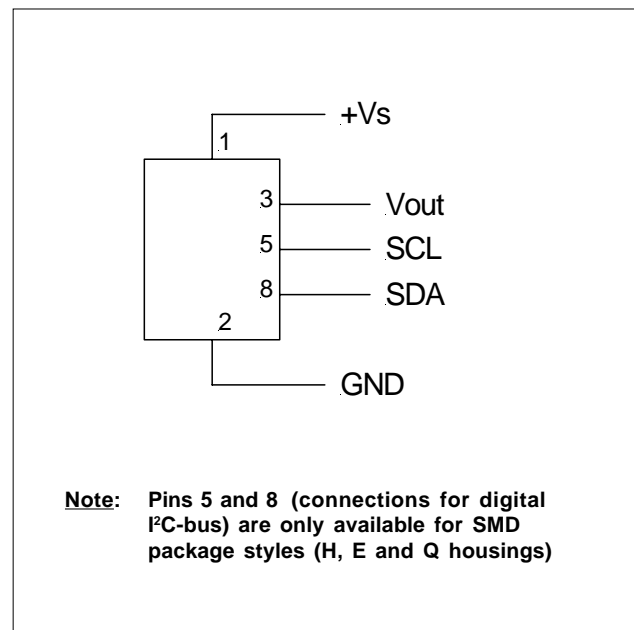

HCLA Series

Miniature amplified low pressure sensors

PRESSURE SENSOR CHARACTERISTICS

($V_s = 5.0\text{ V}$, $T_A = 25\text{ °C}$, analog output signal is **ratiometric** to V_s , digital output signal is **not ratiometric** to V_s , pressure applied to high pressure port)

| Part no. | Operating pressure | Proof pressure ^{5,7} | Burst pressure ^{6,7} | Output signal |
|--------------|--------------------|-------------------------------|-------------------------------|---------------|
| HCLA02X5...B | 0...±2.5 mbar | 250 mbar | 500 mbar | 2.25 ±2 V |
| HCLA12X5...B | 0...±12.5 mbar | 250 mbar | 500 mbar | |
| HCLA0025...B | 0...±25 mbar | 500 mbar | 750 mbar | |
| HCLA0050...B | 0...±50 mbar | 750 mbar | 1200 mbar | |
| HCLA0075...B | 0...±75 mbar | 1200 mbar | 2000 mbar | |
| HCLA02X5...U | 0...2.5 mbar | 250 mbar | 500 mbar | 0.25 - 4.25 V |
| HCLA12X5...U | 0...12.5 mbar | 250 mbar | 500 mbar | |
| HCLA0025...U | 0...25 mbar | 500 mbar | 750 mbar | |
| HCLA0050...U | 0...50 mbar | 750 mbar | 1200 mbar | |
| HCLA0075...U | 0...75 mbar | 1200 mbar | 2000 mbar | |

Specification notes:

1. Shift is relative to 25°C.
2. Shift is within the first hour of excitation applied to the device.
3. Non-linearity refers to the **Best Straight Line** fit, measured for lowest specified pressure, highest specified pressure and 1/2 full scale pressure.
4. Full Scale Span (FSS) is the algebraic difference between the output signal for the highest and lowest specified pressure.
5. Proof pressure is the maximum pressure which may be applied without causing durable shifts of the electrical parameters of the sensing element.
6. Burst pressure is the maximum pressure which may be applied without causing damage to the sensing element or leaks to the housing.
7. The common mode pressure for the HCLA series is 2 bar. Common mode pressure is the maximum pressure that can be applied to both ports of a differential pressure sensor simultaneously without damaging the sensor housing.
8. Max. delay time between pressure change at the pressure die and signal change at the output.
9. The response time depends on the adjusted internal A/D resolution of the sensor. For 12 bit it is typ. 0.5 ms. Other A/D resolutions and response times are available on request. Please contact First Sensor for further information.
10. Sensors with lower current consumption are available on request. Please contact First Sensor for further information.

HCLA Series

Miniature amplified low pressure sensors

PERFORMANCE CHARACTERISTICS

($V_s = 5.0\text{ V}$, $T_A = 25\text{ °C}$, analog output signal is **ratiometric** to V_s , digital output signal is **not ratiometric** to V_s , pressure applied to high pressure port)

HCLA02X5...

| Characteristics | Min. | Typ. | Max. | Unit |
|-------------------------------------------------|--------|-------|-------|-----------|
| Non-linearity and hysteresis (BSL) ³ | | ±0.05 | ±0.25 | %FSS |
| Thermal effects (-25 to 85°C) ¹ | Offset | | ±1.5 | |
| | Span | | ±2.0 | |
| Response delay ^{8,9} | | 0.5 | | ms |
| A/D resolution ⁹ | | 12 | | bit |
| D/A resolution | | | 11 | |
| Current consumption (no load) ¹⁰ | | 5 | | mA |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±0042 | | Count Hex |
| Offset position sensitivity (±1 g) | | ±0063 | | |
| Offset long term drift (one year) | | ±0042 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±10 | | mV |
| Offset position sensitivity (±1 g) | | ±15 | | |
| Offset long term drift (one year) | | ±10 | | |

HCLA02X5...B

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|--------------|------|------|-----------|
| Operating pressure range | -2.5 | | +2.5 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 370A | 3999 | 3C28 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Output | at +2.5 mbar | 6CCC | | |
| | at -2.5 mbar | 0666 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 2.15 | 2.25 | 2.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Output | at +2.5 mbar | 4.25 | | |
| | at -2.5 mbar | 0.25 | | |

HCLA02X5...U

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|------|------|------|-----------|
| Operating pressure range | 0 | | +2.5 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 03D7 | 0666 | 08F6 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Full scale output | | 6CCC | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 0.15 | 0.25 | 0.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Full scale output | | 4.25 | | |

HCLA Series

Miniature amplified low pressure sensors

PERFORMANCE CHARACTERISTICS (cont.)

($V_s = 5.0\text{ V}$, $T_A = 25\text{ °C}$, analog output signal is **ratiometric** to V_s , digital output signal is **not ratiometric** to V_s , pressure applied to high pressure port)

HCLA12X5...

| Characteristics | Min. | Typ. | Max. | Unit |
|-------------------------------------------------|--------|-------|-------|-----------|
| Non-linearity and hysteresis (BSL) ³ | | ±0.05 | ±0.25 | %FSS |
| Thermal effects (-25 to 85°C) ¹ | Offset | | ±1.0 | |
| | Span | | ±1.0 | |
| Response delay ^{8,9} | | 0.5 | | ms |
| A/D resolution ⁹ | | 12 | | bit |
| D/A resolution | | | 11 | |
| Current consumption (no load) ¹⁰ | | 5 | | mA |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±0021 | | Count Hex |
| Offset position sensitivity (±1 g) | | ±0021 | | |
| Offset long term drift (one year) | | ±0021 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±5 | | mV |
| Offset position sensitivity (±1 g) | | ±5 | | |
| Offset long term drift (one year) | | ±5 | | |

HCLA12X5...B

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|---------------|------|-------|-----------|
| Operating pressure range | -12.5 | | +12.5 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 370A | 3999 | 3C28 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Output | at +12.5 mbar | 6CCC | | |
| | at -12.5 mbar | 0666 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 2.15 | 2.25 | 2.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Output | at +12.5 mbar | 4.25 | | |
| | at -12.5 mbar | 0.25 | | |

HCLA12X5...U

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|------|------|-------|-----------|
| Operating pressure range | 0 | | +12.5 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 03D7 | 0666 | 08F6 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Full scale output | | 6CCC | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 0.15 | 0.25 | 0.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Full scale output | | 4.25 | | |

HCLA Series

Miniature amplified low pressure sensors

PERFORMANCE CHARACTERISTICS (cont.)

($V_s = 5.0\text{ V}$, $T_A = 25\text{ °C}$, analog output signal is **rationometric** to V_s , digital output signal is **not rationometric** to V_s , pressure applied to high pressure port)

HCLA0025...

| Characteristics | Min. | Typ. | Max. | Unit |
|-------------------------------------------------|--------|-------|-------|-----------|
| Non-linearity and hysteresis (BSL) ³ | | ±0.05 | ±0.25 | %FSS |
| Thermal effects (-25 to 85°C) ¹ | Offset | | ±0.5 | |
| | Span | | ±1.0 | |
| Response delay ^{8,9} | | 0.5 | | ms |
| A/D resolution ⁹ | | 12 | | bit |
| D/A resolution | | | 11 | |
| Current consumption (no load) ¹⁰ | | 5 | | mA |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±0021 | | Count Hex |
| Offset position sensitivity (±1 g) | | ±0021 | | |
| Offset long term drift (one year) | | ±0021 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±5 | | mV |
| Offset position sensitivity (±1 g) | | ±5 | | |
| Offset long term drift (one year) | | ±5 | | |

HCLA0025...B

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|-------------|------|------|-----------|
| Operating pressure range | -25 | | +25 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 370A | 3999 | 3C28 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Output | at +25 mbar | 6CCC | | |
| | at -25 mbar | 0666 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 2.15 | 2.25 | 2.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Output | at +25 mbar | 4.25 | | |
| | at -25 mbar | 0.25 | | |

HCLA0025...U

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|------|------|------|-----------|
| Operating pressure range | 0 | | +25 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 03D7 | 0666 | 08F6 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Full scale output | | 6CCC | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 0.15 | 0.25 | 0.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Full scale output | | 4.25 | | |

HCLA Series

Miniature amplified low pressure sensors

PERFORMANCE CHARACTERISTICS (cont.)

($V_s = 5.0\text{ V}$, $T_A = 25\text{ °C}$, analog output signal is **ratiometric** to V_s , digital output signal is **not ratiometric** to V_s , pressure applied to high pressure port)

HCLA0050...

| Characteristics | Min. | Typ. | Max. | Unit |
|-------------------------------------------------|--------|-------|-------|-----------|
| Non-linearity and hysteresis (BSL) ³ | | ±0.05 | ±0.25 | %FSS |
| Thermal effects (-25 to 85°C) ¹ | Offset | | ±0.5 | |
| | Span | | ±1.0 | |
| Response delay ^{8,9} | | 0.5 | | ms |
| A/D resolution ⁹ | | 12 | | bit |
| D/A resolution | | | 11 | |
| Current consumption (no load) ¹⁰ | | 5 | | mA |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±0021 | | Count Hex |
| Offset position sensitivity (±1 g) | | ±0021 | | |
| Offset long term drift (one year) | | ±0021 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±5 | | mV |
| Offset position sensitivity (±1 g) | | ±5 | | |
| Offset long term drift (one year) | | ±5 | | |

HCLA0050...B

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|-------------|------|------|-----------|
| Operating pressure range | -50 | | +50 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 370A | 3999 | 3C28 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Output | at +50 mbar | 6CCC | | |
| | at -50 mbar | 0666 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 2.15 | 2.25 | 2.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Output | at +50 mbar | 4.25 | | |
| | at -50 mbar | 0.25 | | |

HCLA0050...U

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|------|------|------|-----------|
| Operating pressure range | 0 | | +50 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 03D7 | 0666 | 08F6 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Full scale output | | 6CCC | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 0.15 | 0.25 | 0.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Full scale output | | 4.25 | | |

HCLA Series

Miniature amplified low pressure sensors

PERFORMANCE CHARACTERISTICS (cont.)

($V_s = 5.0\text{ V}$, $T_A = 25\text{ °C}$, analog output signal is **ratiometric** to V_s , digital output signal is **not ratiometric** to V_s , pressure applied to high pressure port)

HCLA0075...

| Characteristics | Min. | Typ. | Max. | Unit |
|-------------------------------------------------|--------|-------|-------|-----------|
| Non-linearity and hysteresis (BSL) ³ | | ±0.05 | ±0.25 | %FSS |
| Thermal effects (-25 to 85°C) ¹ | Offset | | ±0.5 | |
| | Span | | ±1.0 | |
| Response delay ^{8,9} | | 0.5 | | ms |
| A/D resolution ⁹ | | 12 | | bit |
| D/A resolution | | | 11 | |
| Current consumption (no load) ¹⁰ | | 5 | | mA |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±0021 | | Count Hex |
| Offset position sensitivity (±1 g) | | ±0021 | | |
| Offset long term drift (one year) | | ±0021 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Offset warm-up shift ² | | ±5 | | mV |
| Offset position sensitivity (±1 g) | | ±5 | | |
| Offset long term drift (one year) | | ±5 | | |

HCLA0075...B

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|-------------|------|------|-----------|
| Operating pressure range | -75 | | +75 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 370A | 3999 | 3C28 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Output | at +75 mbar | 6CCC | | |
| | at -75 mbar | 0666 | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 2.15 | 2.25 | 2.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Output | at +75 mbar | 4.25 | | |
| | at -75 mbar | 0.25 | | |

HCLA0075...U

| Characteristics | Min. | Typ. | Max. | Unit |
|--------------------------------------|------|------|------|-----------|
| Operating pressure range | 0 | | +75 | mbar |
| DIGITAL PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 03D7 | 0666 | 08F6 | Count Hex |
| Full scale span (FSS) ⁴ | 63D6 | 6666 | 68F5 | |
| Full scale output | | 6CCC | | |
| ANALOGUE PERFORMANCE CHARACTERISTICS | | | | |
| Zero pressure offset | 0.15 | 0.25 | 0.35 | V |
| Full scale span (FSS) ⁴ | 3.90 | 4.00 | 4.10 | |
| Full scale output | | 4.25 | | |

I²C BUS

Introduction

The HCLA is capable to generate a digital output signal. The device runs a cyclic program, which will store a corrected pressure value with 12 bit resolution about every 250 μ s within the output registers of the internal ASIC. In order to use the sensor for digital signal readout, it should be connected to a bidirectional I²C-bus.

According to the I²C-bus specification, the bus is controlled by a master device, which generates the clock signal, controls the bus access and generates START and STOP conditions. The HCLA is designed to work as a slave, hence it will only respond to requests from a master device.

Digital I²C interface

The HCLA complies with the following protocol (Fig. 1):

Bus not busy: During idle periods both data line (SDA) and clock line (SCL) remain HIGH.

START condition (S): HIGH to LOW transition of SDA line while clock (SCL) is HIGH is interpreted as START condition. START conditions are always generated by the master. Each initial request for a pressure value has to begin with a START condition.

STOP condition (P): LOW to HIGH transition of SDA line while clock (SCL) is HIGH determines STOP condition. STOP conditions are always generated by the master. More than one request for the current pressure value can be transmitted without generation of intermediate STOP condition.

DATA valid (D): State of data line represents valid data when, after START condition, data line is stable for duration of HIGH period of clock signal. Data on line must be changed during LOW period of clock signal. There is one clock pulse per bit of data.

Acknowledge (A): Data is transferred in pieces of 8 bits (1 byte) on serial bus, MSB first. After each byte receiving device – whether master or slave – is obliged to pull data line LOW as acknowledge for reception of data. Master must generate an extra clock pulse for this purpose. When acknowledge is missed, slave transmitter becomes inactive. It is on master either to send last command again or to generate STOP condition in that case.

Slave address: The I²C-bus master-slave concept requires a unique address for each device. The HCLA has a preconfigured slave address (1111000xb). By factory programming it is possible to define a secondary slave address additional to the general one. According to I²C specification 127 different addresses are available. The sensor will then listen to both slave addresses. After generating a START condition the master sends the address byte containing a 7 bit address followed by a data direction bit (R/W). A "0" indicates a transmission from master to slave (WRITE), a "1" indicates a data request (READ).

DATA operation: The sensor starts to send 2 data bytes containing the current pressure value as a 15 bit information placed in the output registers.

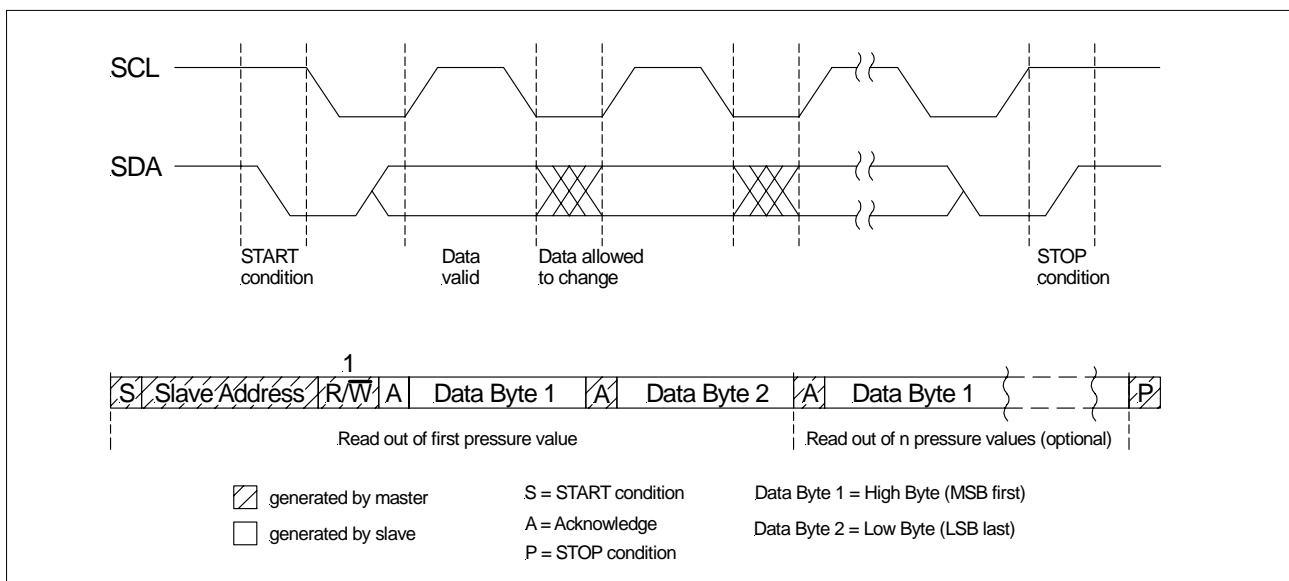


Fig. 1: I²C bus protocol

HCLA Series

Miniature amplified low pressure sensors

I²C Interface Parameters

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|------------------------------------------------------------|---------------------|------|------|------|---------------------|
| Input high level | | 90 | | 100 | % of V _s |
| Input low level | | 0 | | 10 | |
| Output low level | | | | 10 | |
| Pull-up resistor | | 500 | | | Ω |
| Load capacitance @ SDA | C _{SDA} | | | 400 | pF |
| Input capacitance @ SDA/SCL | C _{I2C IN} | | | 10 | |
| SCL clock frequency | F _{SCL} | 100* | | 400 | kHz |
| Bus free time between STOP and START condition | t _{BUF} | 1.3 | | | μs |
| Hold time (repeated) START condition, to first clock pulse | t _{HD,STA} | 0.8 | | | |
| LOW period of SCL | t _{LOW} | 1.3 | | | |
| HIGH period of SCL | t _{HIGH} | 0.6 | | | |
| Setup time repeated START condition | t _{SU,STA} | 1 | | | |
| Data hold time | t _{HD,DAT} | 0 | | | |
| Data setup time | t _{SU,DAT} | 0.2 | | | |
| Rise time of both SDA and SCL | t _R | | | 0.3 | |
| Fall time of both SDA and SCL | t _F | | | 0.3 | |
| Setup time for STOP condition | t _{SU,STO} | 0.6 | | | |

* recommended

Note: First Sensor recommends communication speeds of at least 100 kHz (max. 400 kHz). Please contact us for further information.

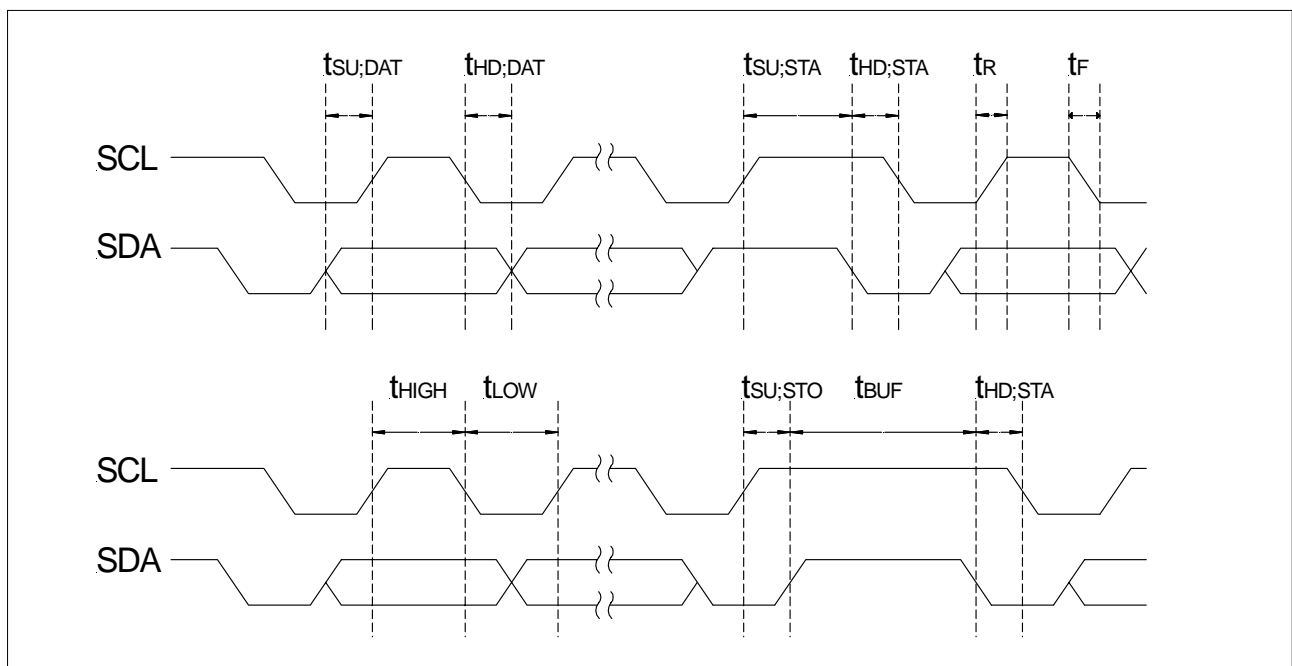


Fig. 2: Timing characteristics





HCLA Series

Miniature amplified low pressure sensors

PHYSICAL DIMENSIONS AND ELECTRICAL CONNECTIONS


HCLA...D...

SIL dual port, same side

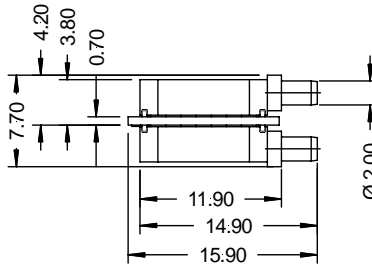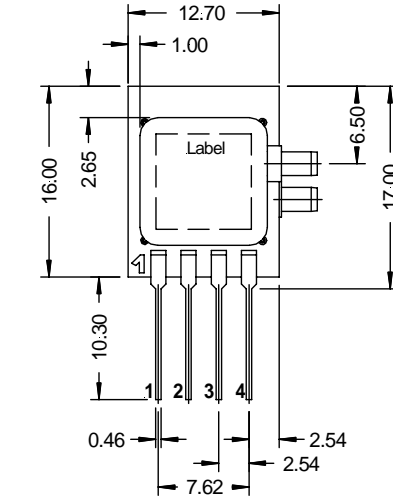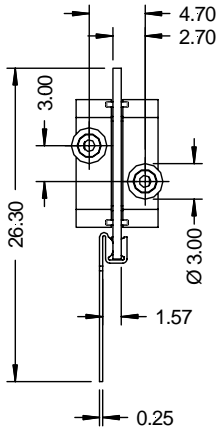

| Pin | Connection |
|-----|------------|
| 1 | +Vs |
| 2 | GND |
| 3 | Vout |
| 4 | I / C * |





* Internal connection.
Do not connect
for any reason



first angle projection
dimensions in mm


HCLA...E...

SMD dual port, same side

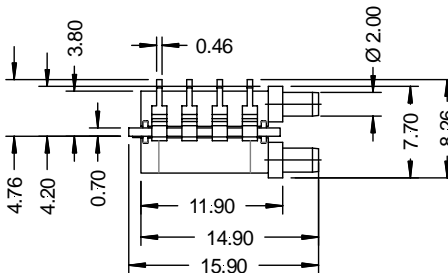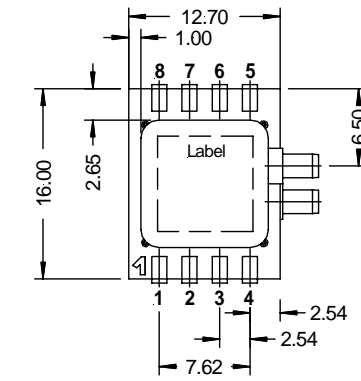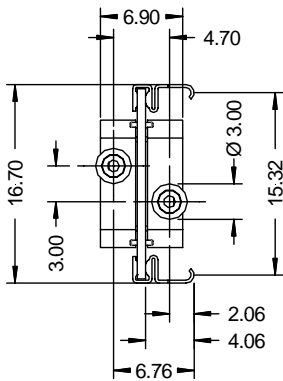

| Pin | Connection |
|-----|------------|
| 1 | +Vs |
| 2 | GND |
| 3 | Vout |
| 4 | I / C * |
| 5 | SCL |
| 6 | I / C * |
| 7 | I / C * |
| 8 | SDA |

* Internal connection.
Do not connect
for any reason



first angle projection
dimensions in mm





HCLA Series

Miniature amplified low pressure sensors

PHYSICAL DIMENSIONS AND ELECTRICAL CONNECTIONS (cont.)


HCLA...G...

SIL single port

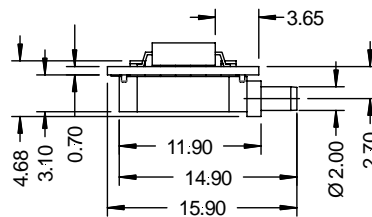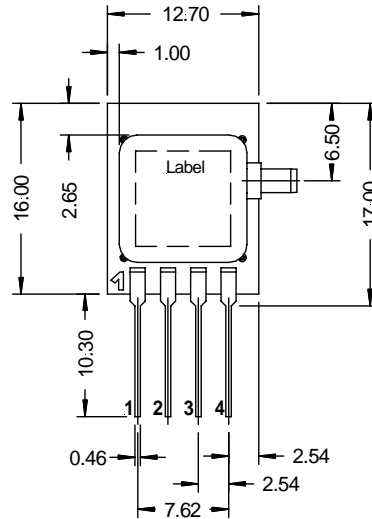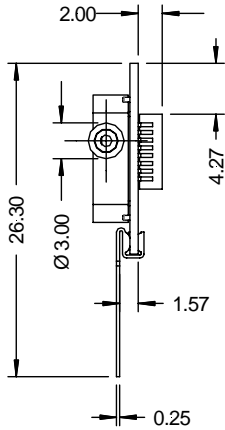

| Pin | Connection |
|-----|------------|
| 1 | +Vs |
| 2 | GND |
| 3 | Vout |
| 4 | I / C * |





* Internal connection.
Do not connect
for any reason



first angle projection
dimensions in mm


HCLA...H...

SMD single port

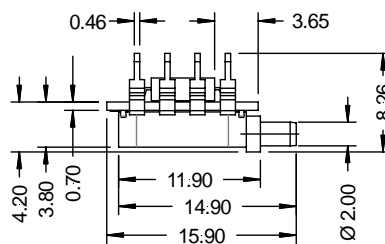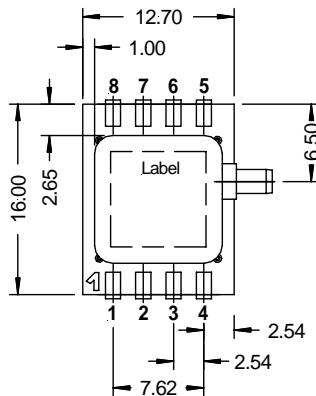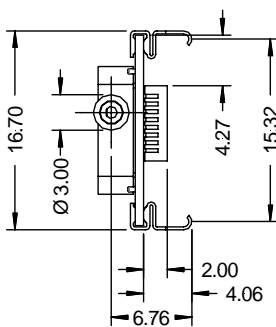

| Pin | Connection |
|-----|------------|
| 1 | +Vs |
| 2 | GND |
| 3 | Vout |
| 4 | I / C * |
| 5 | SCL |
| 6 | I / C * |
| 7 | |
| 8 | SDA |

* Internal connection.
Do not connect
for any reason



first angle projection
dimensions in mm


HCLA Series

Miniature amplified low pressure sensors

HOUSING OPTIONS


Different housing options are available on request. Please contact First Sensor.

SIL dual port, opposite side (HCLA...P...)

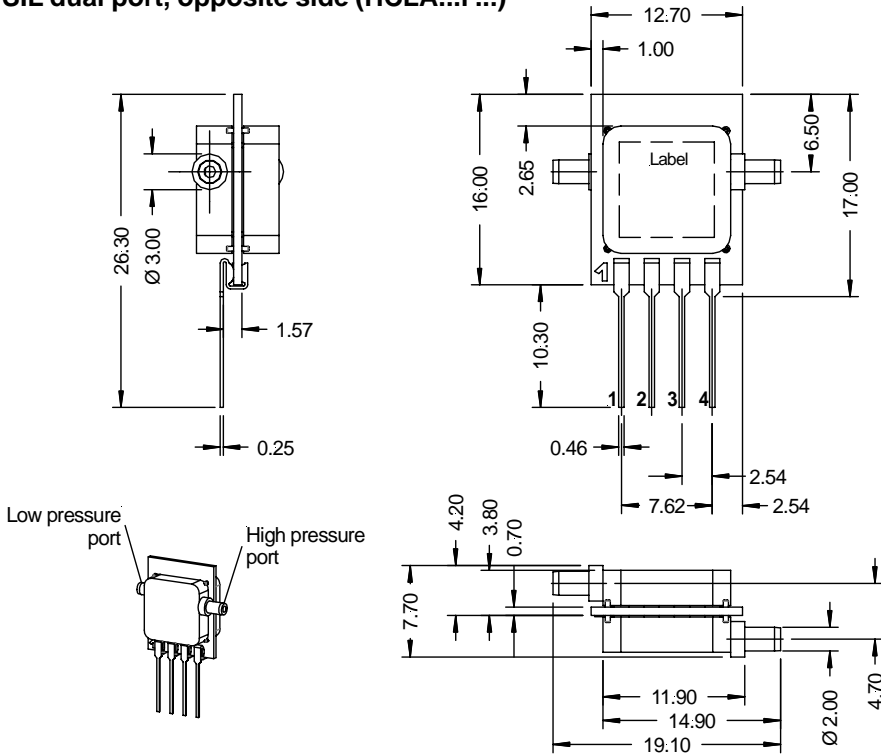


| Pin | Connection |
|-----|------------|
| 1 | +Vs |
| 2 | GND |
| 3 | Vout |
| 4 | I / C * |

* Internal connection. Do not connect for any reason




first angle projection
dimensions in mm

SMD dual port, opposite side (HCLA...Q...)

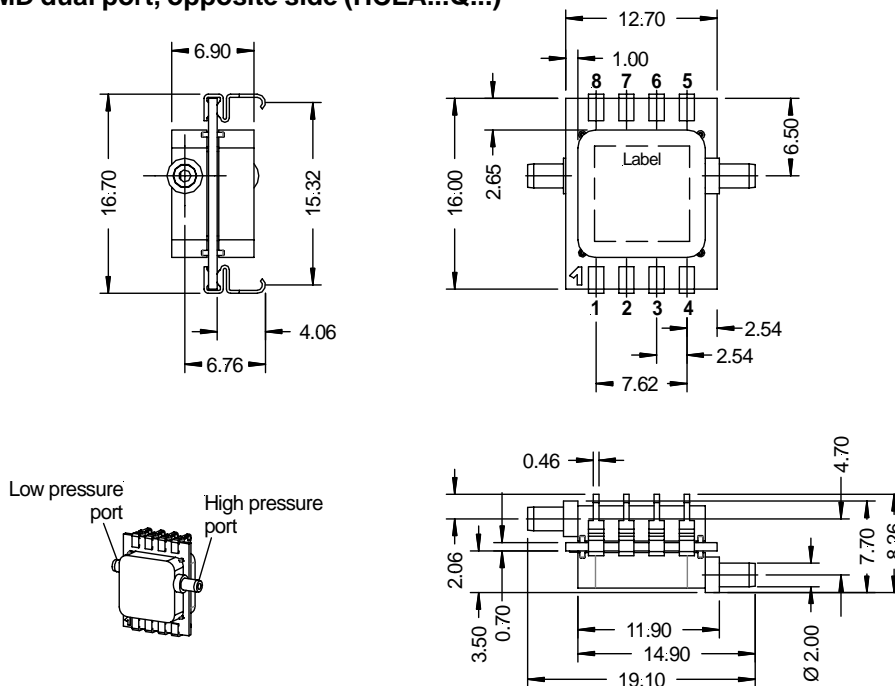

| Pin | Connection |
|-----|------------|
| 1 | +Vs |
| 2 | GND |
| 3 | Vout |
| 4 | I / C * |
| 5 | SCL |
| 6 | I / C * |
| 7 | |
| 8 | SDA |

* Internal connection. Do not connect for any reason



first angle projection
dimensions in mm


HCLA Series

Miniature amplified low pressure sensors

HOUSING OPTIONS (cont.)

Different housing options are available on request. Please contact First Sensor.

SIL dual port, top side (HCLA...T...)

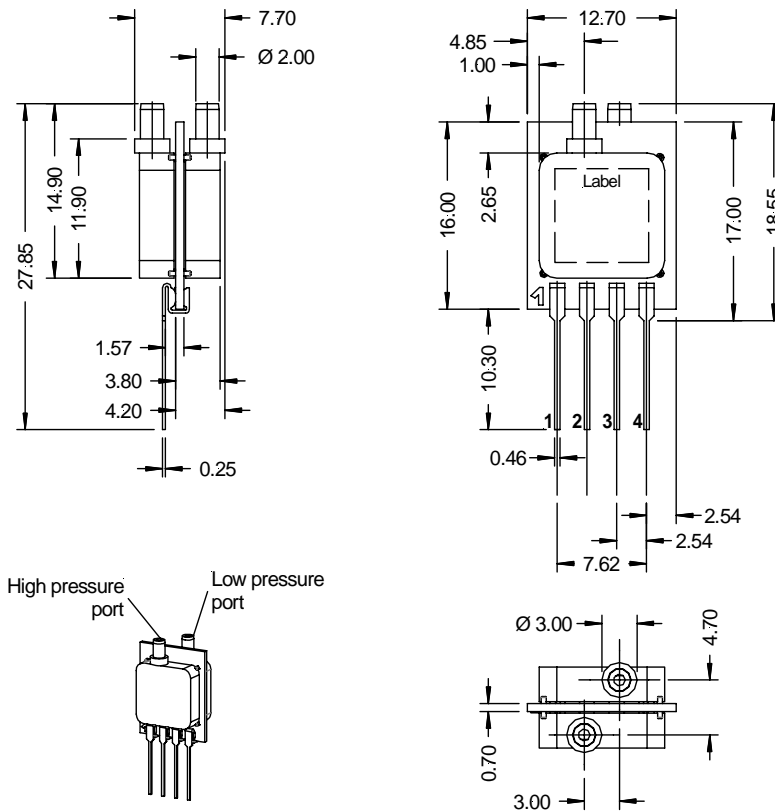

| Pin | Connection |
|-----|------------|
| 1 | +Vs |
| 2 | GND |
| 3 | Vout |
| 4 | I / C * |

* Internal connection.
Do not connect
for any reason

first angle projection
dimensions in mm

HCLA Series


Miniature amplified low pressure sensors

HOUSING OPTIONS (cont.)

Different housing options are available on request. Please contact First Sensor.

Barbed pressure ports

(Available for all housing styles. Sample package shown: SMD dual port, same side)

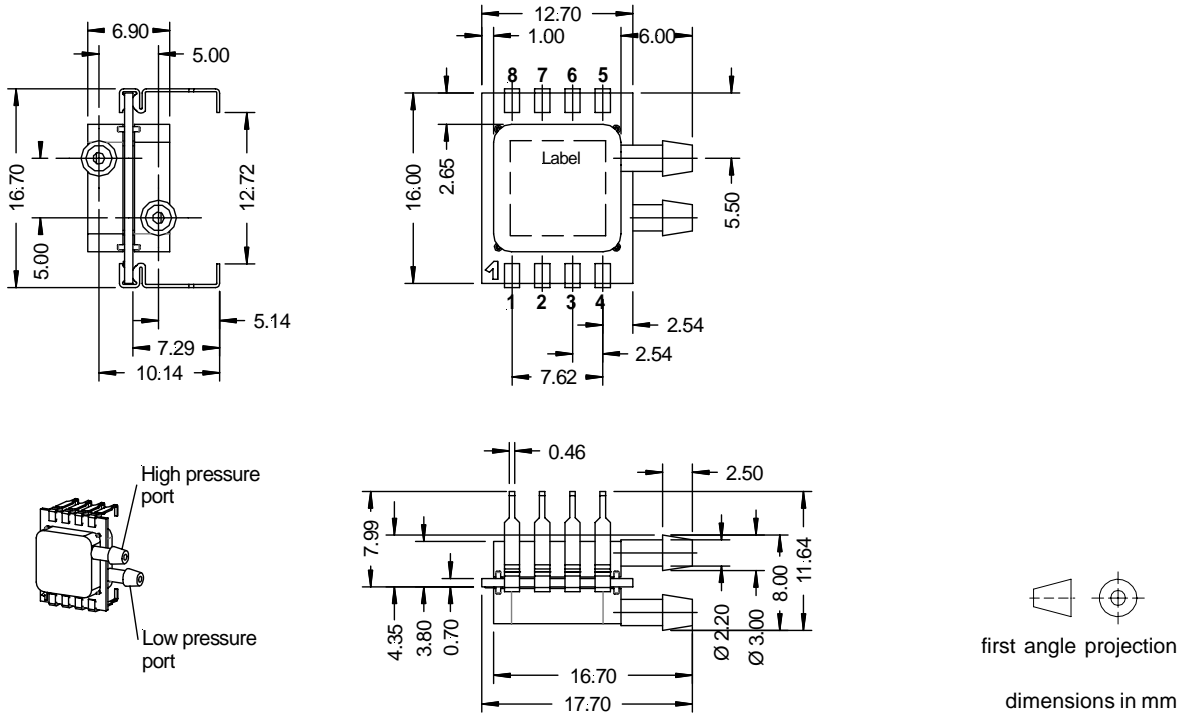

Dual Inline Packages (DIP)

(Available for all housing styles. Sample package shown: DIP dual port, same side)

