

HIGH FREQUENCY BALUN ADAPTOR

For SMPTE-292M HDTV
Ruggedized






- Transforms 100Ω balanced differential signal to 75 Ω , grounded unbalanced signal
- Designed for SMPTE-292M HDTV application at 1.485GBs data rate
- Designed for flight application with Environmental , EMI and corrosion protection.
- Moisture Sensitivity Level: 1

Electrical Specifications @ 25 °C – Operating Temperature – 55 °C to +125 °C

Part Number	Impedance Unbalanced	Impedance Balanced	Insertion Loss db MAX. 1.485 GBs	Jitter Dj pSec. Max. 1.485 GBs, PN7
HFBM075100B	75	150	-2.0	110
HFBM075100C	75	100	-2.0	110

Mechanical

Electrical Schematic

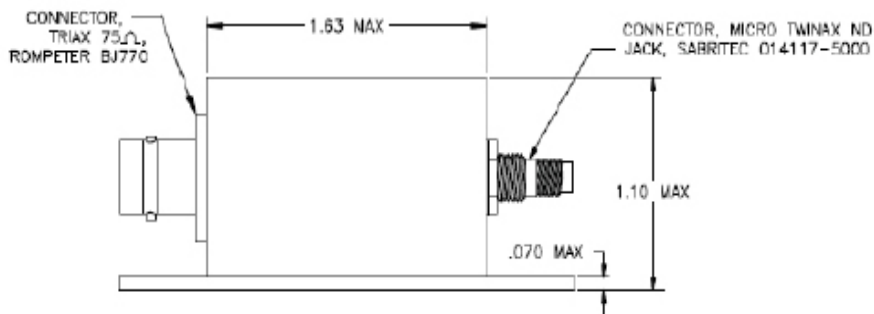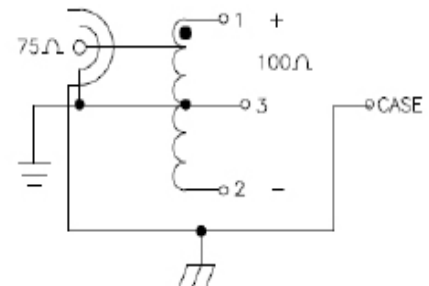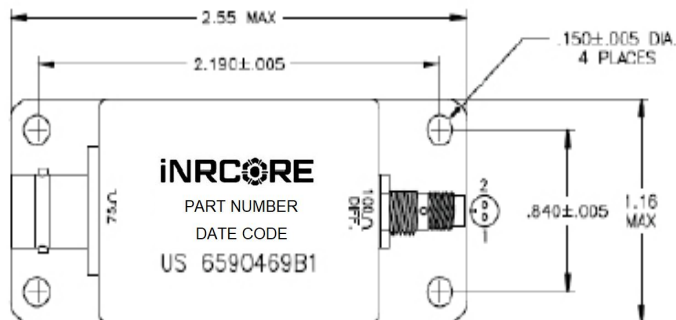


HIGH FREQUENCY BALUN ADAPTOR

For SMPTE-292M HDTV
Ruggedized



Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

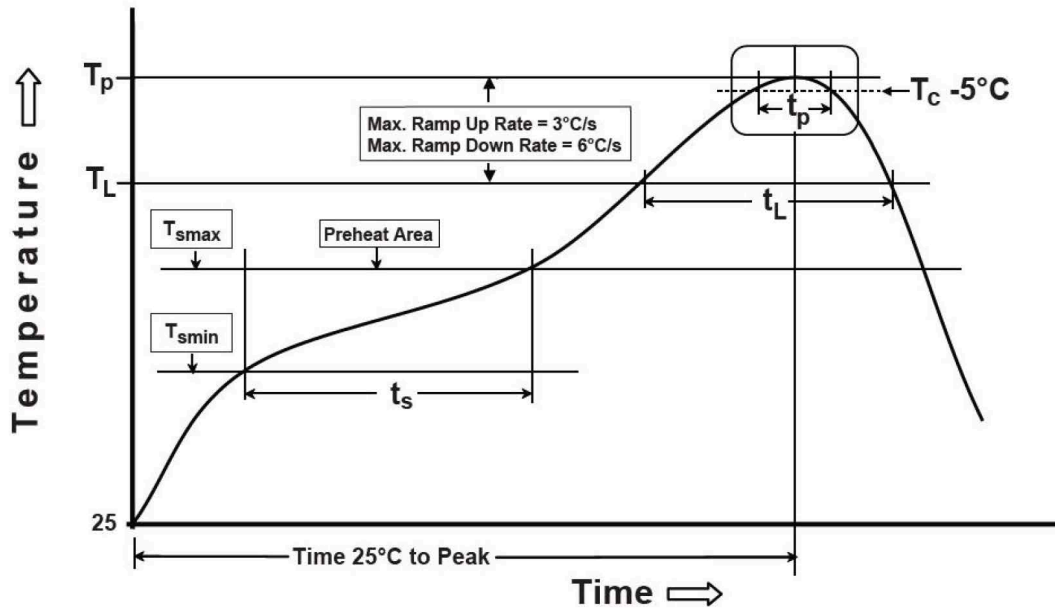

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
100	150	183	235	60-120	60-150	20	3°C/s MAX	6°C/s MAX	360

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

For More Information

iNRCORE, LLC
311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: + 1.215.781.6400
Fax: +1.215.7816430

Global Sales Representatives and Locations:
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

