



### Main

|                                    |                            |
|------------------------------------|----------------------------|
| Range of Product                   | Harmony Modular iPC        |
| Accessory / Separate Part Type     | Adaptor                    |
| Accessory / separate part category | Adaptation accessory       |
| Product compatibility              | Harmony iPC industrial PCs |

### Complementary

|                                       |   |
|---------------------------------------|---|
| Accessory / separate part destination | Harmony modular display HMIDM   |
| [Us] rated supply voltage             | 24 V DC<br>100...240 V AC external adaptor  |
| Input voltage                         | 24 V DC<br>100...240 V AC external adaptor  |
| Inrush current                        | 5.3 A   |
| Integrated connection type            | Display port input video signal<br>1 USB (V2.0) port B output touch screen signal   |
| Power consumption in W                | 15.77 W HMIDM6422)<br>13.97 W HMIDM6522)<br>12.42 W HMIDM7421)<br>14.68 W HMIDM7521)<br>17.57 W HMIDM9521)<br>23.33 W HMIDMA521)<br>22.05 W HMIDM6422 receiver module)<br>20.02 W HMIDM6522 receiver module)<br>19.05 W HMIDM7421 receiver module)<br>21.29 W HMIDM7521 receiver module)<br>24 W HMIDM9521 receiver module)<br>29.12 W HMIDMA521 receiver module)<br>24.51 W HMIDM6422 transmitter and receiver module)<br>22.53 W HMIDM6522 transmitter and receiver module)<br>21.25 W HMIDM7421 transmitter and receiver module)<br>23.76 W HMIDM7521 transmitter and receiver module)<br>26.53 W HMIDM9521 transmitter and receiver module)<br>31.48 W HMIDMA521 transmitter and receiver module) |
| Net Weight                            | 0.00 Lb(US) (0 kg)<br>3.97 Lb(US) (1.8 kg)<br>5.29 lb(US) (2.4 kg)  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

|                                       |   |
|---------------------------------------|---|
| Pollution degree                      | 2   |
| Ambient Air Temperature for Operation | 32...131 °F (0...55 °C)   |
| Ambient Air Temperature for Storage   | -22...158 °F (-30...70 °C)  |
| Operating altitude                    | 6561.68 ft (2000 m)   |
| Product Certifications                | IEC Ex hazardous locations 3GD zone 2/22<br>RCM<br>CULus HazLoc Class I Division 2 ANSI/ISA 12-12-01<br>CCC<br>CULus CSA 22-2 No 142<br>EAC<br>ATEX<br>CE<br>CULus<br>CULus HazLoc Class I Division 2 CSA 22-2 No 213 |
| Relative Humidity                     | 10...95 % non-condensing  |

## Ordering and shipping details

|                   |                                   |
|-------------------|-----------------------------------|
| Category          | 22574-MAGELIS BOX PC AND PANEL PC |
| Discount Schedule | MC2                               |
| GTIN              | 3606481245564                     |
| Returnability     | No                                |
| Country of origin | TW                                |

## Packing Units

|                              |                          |
|------------------------------|--------------------------|
| Unit Type of Package 1       | PCE                      |
| Number of Units in Package 1 | 1                        |
| Package 1 Height             | 5.91 in (15.0 cm)        |
| Package 1 Width              | 9.25 in (23.5 cm)        |
| Package 1 Length             | 14.76 in (37.5 cm)       |
| Package 1 Weight             | 4.85 lb(US) (2.2 kg)     |
| Unit Type of Package 2       | S04                      |
| Number of Units in Package 2 | 3                        |
| Package 2 Height             | 11.81 in (30.0 cm)       |
| Package 2 Width              | 15.75 in (40.0 cm)       |
| Package 2 Length             | 23.62 in (60.0 cm)       |
| Package 2 Weight             | 14.55 lb(US) (6.6 kg)    |
| Unit Type of Package 3       | P12                      |
| Number of Units in Package 3 | 36                       |
| Package 3 Height             | 31.50 in (80 cm)         |
| Package 3 Width              | 41.34 in (105 cm)        |
| Package 3 Length             | 49.21 in (125 cm)        |
| Package 3 Weight             | 229.72 lb(US) (104.2 kg) |

## Offer Sustainability

|                           |   |
|---------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation          | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC        | Yes   |
| EU RoHS Directive         | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>  |
| Mercury free              | Yes   |
| China RoHS Regulation     | <a href="#">China RoHS Declaration</a>  |

---

RoHS exemption information




---

WEEE

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

---

## External Dimensions

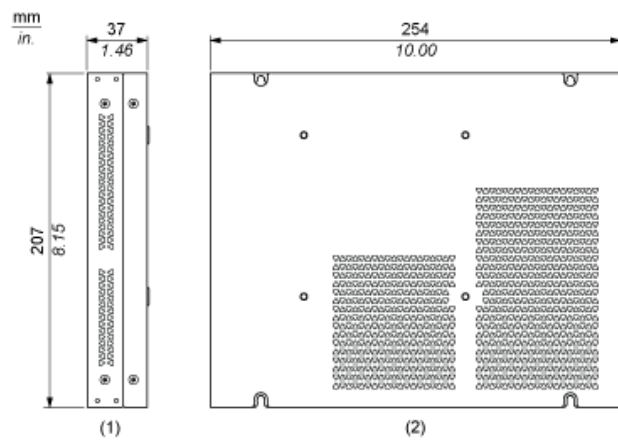

- (1) Side view
- (2) Rear view