


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV	DESCRIPTION	DATE	APPROVED
A	PER EP-3082	02/17/23	FUH

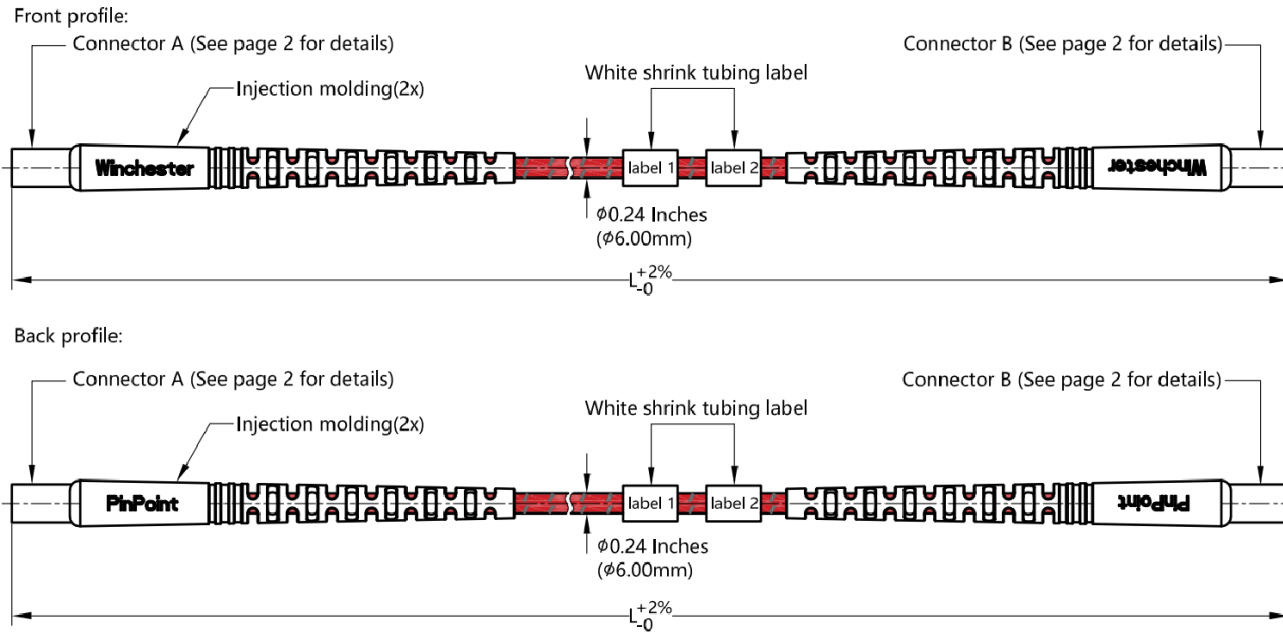

label 1:
winconn.com
PN:HPA50-XXXXXX-YYY

label 2:
Month Year
MM/YYYY
SN:XXXX

MATERIAL SPECIFICATIONS

MECHANICAL SPECIFICATIONS

ENVIRONMENTAL SPECIFICATIONS

PIECE PARTS	MATERIALS	PLATING
Coupling Nut	Stainless Steel	Passivated
Body	Stainless Steel	Passivated
Contact Pin	Be-Cu	Gold
Insulator	PEEK	Natural
Cable	HPA50, armored low loss phase stable cable (Red+Gray)	N/A

MIN. BENDING RADIUS STATIC	1.18 inches(30mm)
MIN. BENDING RADIUS DYNAMIC	2.35 inches(60mm)
RECOMMENDED COUPLING TORQUE	7-9 lb-in (2.4mm Male)
COUPLING NUT RETENTION FORCE	60 lbs (2.4mm Male)
DURABILITY	5000 Cycles

RoHS & REACH	Compliant
TEMPERATURE RANGE	-40°C~+125°C

ELECTRICAL SPECIFICATIONS

IMPEDANCE	50Ω
FREQUENCY RANGE	DC~50GHz
VOLTAGE RATING	335V(rms)
DIELECTRIC WITHSTANDING VOLTAGE	750V(DC)
INSULATION RESISTANCE	3000MΩ
INSERTION LOSS	See Page 3 for details
VSWR	1.30 Max.
MECHANICAL PHASE STABILITY	±9° Max.
MECHANICAL AMPLITUDE STABILITY	±0.12dB Max.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMALS: ±0.12[0.3]
ANGLES: ±5°

DRAWN	DATE
FUH	01/17/23
APPR.	DATE
DCAM	01/17/23
APPR.	DATE
XXX	XX/XX/XX
APPR.	DATE
XXX	XX/XX/XX

Winchester Interconnect. 68 Water St. Norwalk, CT 06854


TITLE:
PINPOINT 2.4mm HIGH PERFORMANCE CABLE ASSEMBLY

THIRD ANGLE PROJECTION	SIZE A	DWG. NO.	REV
	SH 1 OF 3	SDHPA50-XXXXXX-YYY	A


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV	DESCRIPTION	DATE	APPROVED
A	PER EP-3082	02/17/23	FUH


2.4mm Male for HPA50

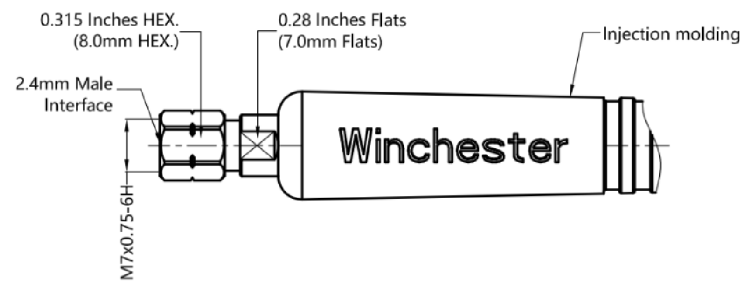

2.4mm Female for HPA50

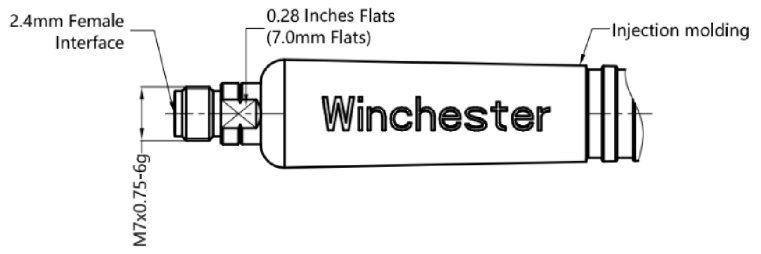

NMD 2.4mm Female for HPA50

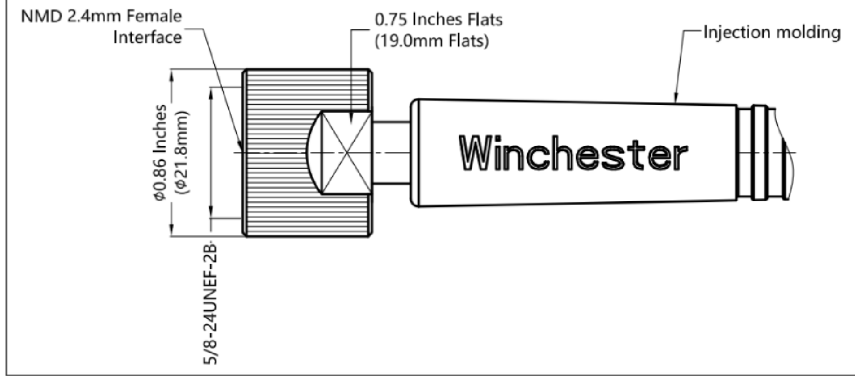

68 Water St.
Norwalk, CT 06854


DRAWN	DATE
FUH	01/17/23
APPR.	DATE
DCAM	01/17/23
APPR.	DATE
XXX	XX/XX/XX
APPR.	DATE
XXX	XX/XX/XX



TITLE:
**PINPOINT 2.4mm HIGH PERFORMANCE
CABLE ASSEMBLY**

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]

TOLERANCES:
DECIMALS: ±0.12[0.3]
ANGLES: ±5°



THIRD ANGLE PROJECTION
SIZE
A
SH 2 OF 3

DWG. NO.
SDHPA50-XXXXXX-YYY

REV
A