

Honeywell



Thin Film Platinum RTDs **HRTS Series**



Datasheet

Thin Film Platinum RTDs

The HRTS Series Thin Film Platinum RTDs (Resistance Temperature Detectors) are designed to measure temperatures from -70 °C to 260 °C [-94 °F to 500 °F]. These fully-assembled elements are ready to use in probe assemblies without the need for fragile splices to extension leads.

These products are manufactured using a thin layer of platinum deposited on an alumina substrate and are laser trimmed to a resistance interchangeability of a standard ±0.2% ($\pm 0.5\text{ }^{\circ}\text{C}$ accuracy) or an optional ±0.1% ($\pm 0.3\text{ }^{\circ}\text{C}$ accuracy). The sensor chip is then glassed, wired and potted to result in an alumina package with Teflon®-insulated lead wires.

Key Features

- Linear resistance vs temperature
- Interchangeable resistance
- Accurate
- Fast response
- Laser trimmed
- Ceramic case material
- TFE Teflon® lead wires
- Ready-to-use, fully-assembled elements

Potential Applications

Temperature sensing for monitoring, compensation and regulation in:

INDUSTRIAL

- HVAC equipment
- Instrument and probe assemblies
- Process control for temperature regulation
- Motor windings and bearings
- Battery packs
- Environmental chambers

MEDICAL

- Autoclaves

AEROSPACE AND DEFENSE

- Aircraft
- Space vehicles
- Satellites
- Rovers

Thin Film Platinum RTDs, HRTS Series

Table 1. Specifications

Characteristic	Condition	Parameter
Alpha: $R_0 = 1000 \Omega$ $R_0 = 100 \Omega$	0 °C	0.00375 Ω/Ω/°C 0.00385 Ω/Ω/°C
Temperature range:	—	-70 °C to 260 °C [-94 °F to 500 °F]
Temperature accuracy: $R_0 \pm 0.2\%$ trim (standard) $R_0 \pm 0.1\%$ trim (optional)	—	±0.5 °C or 0.8% of temperature, whichever is greater ±0.3 °C or 0.6% of temperature, whichever is greater
Time constant, 1/e	metal surfaces	0.6 s typ.
Operating current	—	2 mA max. for self heating errors of 1 °C; 1 mA recommended
Self heating	—	0.3 mW/°C
Construction material: case leads	—	alumina nickel-coated stranded copper, Teflon® insulated

Table 2. Constant Values ($\beta = 0$ and $C = 0$ for $T > 0$ °C)

Constant	1000 Ω	100 Ω	Functional Behavior
Alpha α (°C⁻¹)	0.00375 ± 0.000029	0.003850 ± 0.000010	$R_T = R_0(1 + AT + BT^2 - 100CT^3 + CT^4)$
Delta δ (°C)	1.605 ± 0.009	1.4999 ± 0.007	Where: R_T = Resistance (Ω) at temperature T (°C) R_0 = Resistance (Ω) at 0 °C
Beta β (°C)	0.16	0.10863	T = Temperature (°C) $A = \alpha + \frac{\alpha\delta}{100}$ $B = -\frac{\alpha\delta}{100^2}$ $C_{T<0} = -\frac{\alpha\beta}{100^4}$
A (°C⁻¹)	3.81×10^{-3}	3.908×10^{-3}	
B (°C⁻²)	-6.02×10^{-7}	-5.775×10^{-7}	
C (°C⁻⁴)	-6.0×10^{-12}	-4.183×10^{-12}	

Table 3. Accuracy vs Temperature

Temperature (°C)	Tolerance			
	Standard Trim (±0.2%)		Optional Trim (±0.1%)	
	±ΔR¹ (Ω)	±ΔT (°C)	±ΔR¹ (Ω)	±ΔT (°C)
-100	2.9	0.8	2.4	0.6
0	2.0	0.5	1.0	0.3
100	2.9	0.8	2.2	0.6
200	5.6	1.6	4.3	1.2
300	8.2	2.4	6.2	1.8
400	11.0	3.2	8.3	2.5
500	12.5	4.0	9.6	3.0
600	15.1	4.8	10.4	3.3

¹1000 Ω RTD. Divide Δ by 10 for 100 Ω RTD.

Thin Film Platinum RTDs, HRTS Series

Figure 1. Resistance vs Temperature


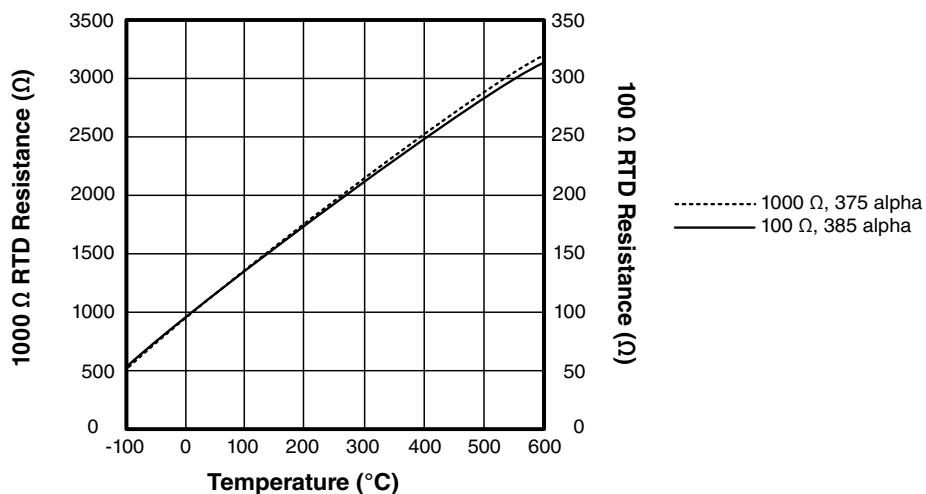


Figure 2. Mounting Dimensions (For reference only. mm/[in].)

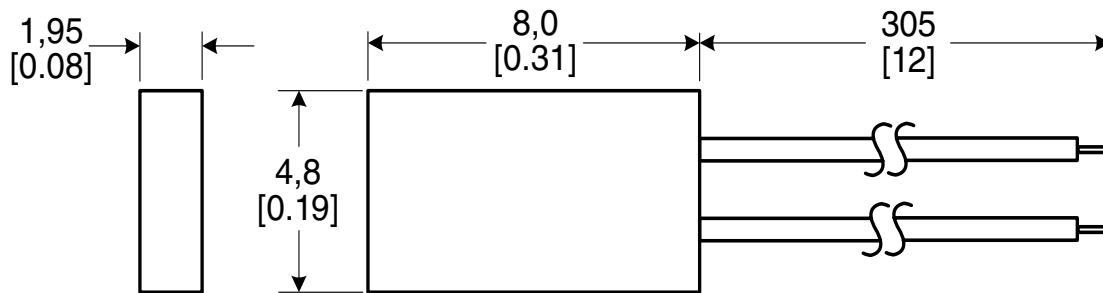

CAUTION

PRODUCT DAMAGE

Failure to comply with these instructions may result in product damage.

- Ensure proper ESD (Electrostatic Discharge) precautions are followed when handling this product.


Table 4. Order Guide

Catalog Listing	Description
HRTS-5760-B-T-0-12	HRTS Series platinum thin film RTD with two, 28 gauge TFE Teflon®-insulated leadwires, a resistance and alpha of 100 Ω: 0.00385 Ω/Ω/°C, a standard ±0.2% trim resistance, and 305 mm [12 in] leadwires
HRTS-5760-B-T-1-12	HRTS Series platinum thin film RTD with two, 28 gauge TFE Teflon®-insulated leadwires, a resistance and alpha of 100 Ω: 0.00385 Ω/Ω/°C, an optional ±0.1% trim resistance, and 305 mm [12 in] leadwires
HRTS-5760-B-U-0-12	HRTS Series platinum thin film RTD with two, 28 gauge TFE Teflon®-insulated leadwires, a resistance and alpha of 1000 Ω: 0.00375 Ω/Ω/°C, a standard ±0.2% trim resistance, and 305 mm [12 in] leadwires
HRTS-5760-B-U-1-12	HRTS Series platinum thin film RTD with two, 28 gauge TFE Teflon®-insulated leadwires, a resistance and alpha of 1000 Ω: 0.00375 Ω/Ω/°C, an optional ±0.1% trim resistance, and 305 mm [12 in] leadwires


Thin Film Platinum RTDs, HRTS Series

Figure 3. Circuits

Wheatstone Bridge 2-Wire Interface

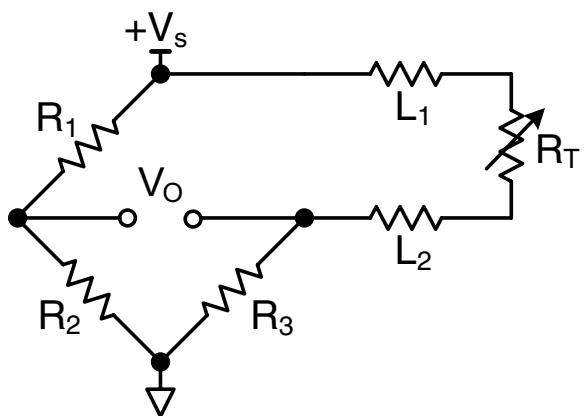

Linear Output Voltage

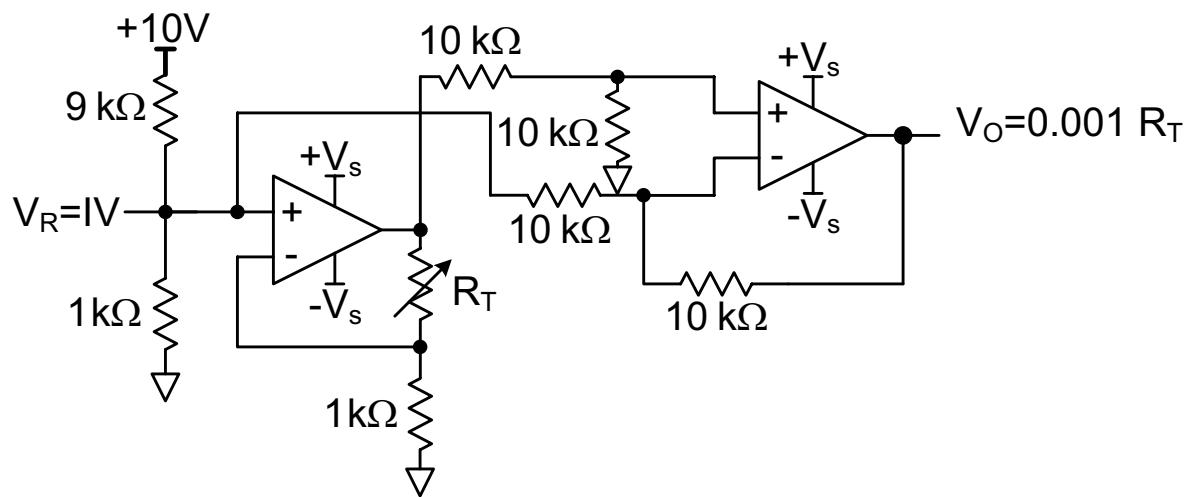

Adjustable Point (Comparator) Interface

