


HZ0805B252R-10

PHYSICAL DIMENSIONS:

A	2.00 [.079]	+ 0.20 [.008]
B	1.25 [.049]	+ 0.20 [.008]
C	1.05 [.041]	+ 0.35 [.014]
D	0.51 [.020]	+ 0.25 [.010]

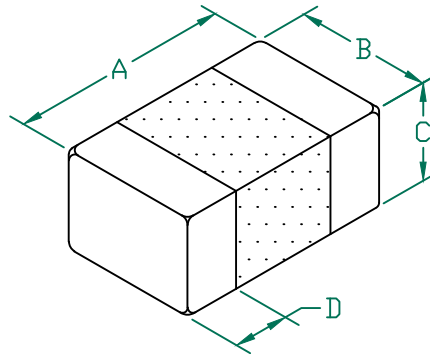


ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	2500	
Minimum	1875	
Maximum	3125	200 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL, PAPER TAPER.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.
4. OPERATING TEMP. RANGE: -40°C~+125°C (INCLUDING SELF-HEATING)
5. COSMETIC SPECIFICATION REFER TO WI-QA-124.


Z vs FREQUENCY
IMPEDANCE UNDER DC BIAS

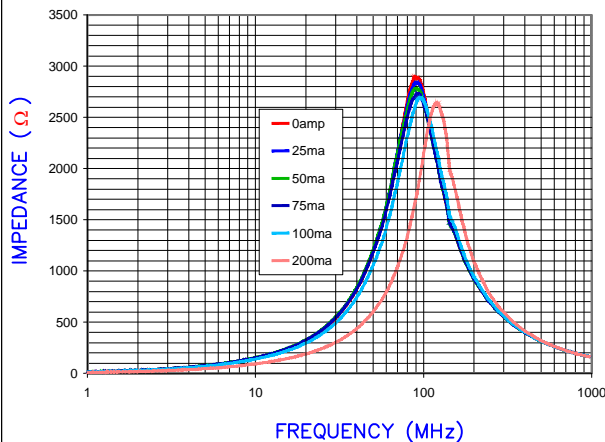

FREQUENCY (MHz)
|Z|, R, AND X vs. FREQUENCY

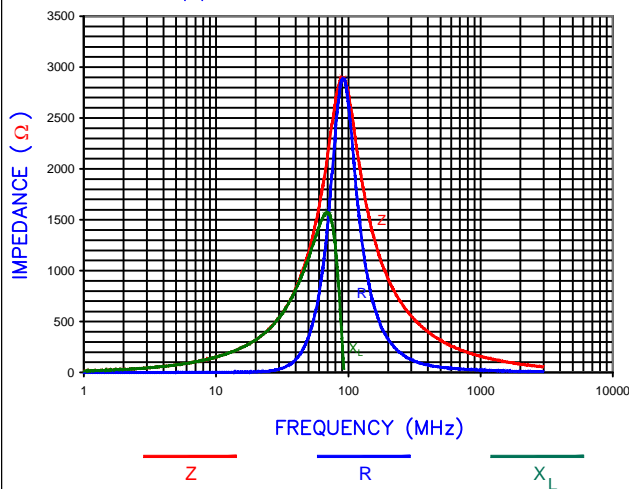


LAND PATTERNS FOR REFLOW SOLDERING

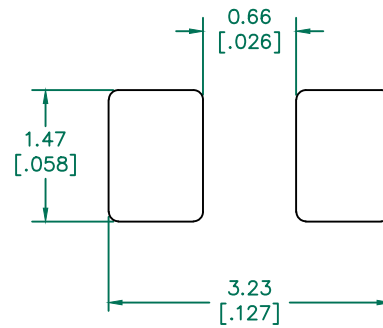

(For wave soldering, add 0.763 [.030] to this dimension.)

RECOMMENDED SOLDERING CONDITIONS

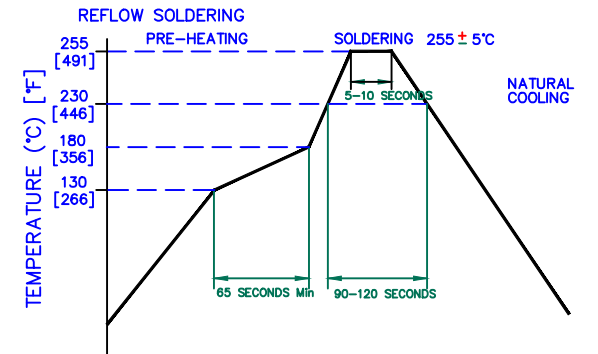

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.



PROJECT/PART NUMBER: HZ0805B252R-10
REV: B
PART TYPE: CO-FIRE
DRAWN BY: QU

B	UPDATE LAIRD LOGO AND NOTES 4	08/05/13	QU	DATE: 08/20/12	SCALE: NTS	SHEET: 1 of 1
A	ORIGINAL DRAFT	08/20/12	QU	CAD #	TOOL #	
REV	DESCRIPTION	DATE	INT	HZ0805B252R-10-B		

AGILENT E4991A RF Impedance/Material Analyzer
Agilent 16194A.

