


# Proximity Sensors Inductive Thermoplastic Polyester Housing Types IA, M12, M18 and M30, NAMUR

CARLO GAVAZZI



- Euronorm thermoplastic polyester housing, cylindrical
- Short or long versions
- Diameter: M12, M18, M30
- Sensing distance: 2 to 15 mm
- Output: NAMUR EN 50 227
- Protection: Reverse polarity
- LED-indication
- 2 m cable or M12 plug

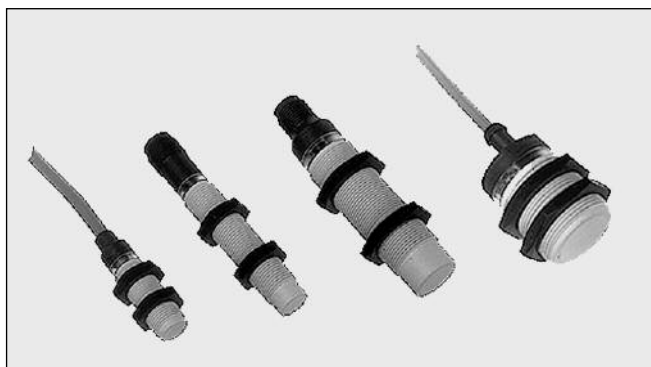


## Product Description

Proximity switch in M12, M18 and M30 polyester housings. Made in accordance with euronorms EN 50 227 and EN 60 947-5-2. For metal versions refer to type IA 12 E... Amplifier relay SD..... is available.

## Ordering Key

IA 12 CSF 02 UC M1

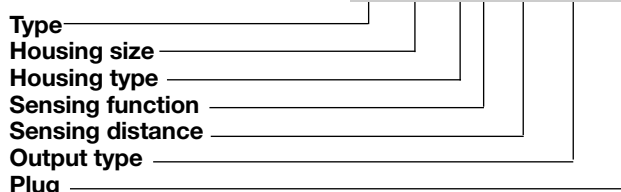

## Type Selection

Housing diameter	Body style	Connection	Rated operating distance (S <sub>n</sub> )	Ordering no. NAMUR
M12	Short	Cable	2 mm <sup>1)</sup>	IA 12 CSF 02 UC
M12	Short	Plug	2 mm <sup>1)</sup>	IA 12 CSF 02 UC M1
M12	Long	Cable	2 mm <sup>1)</sup>	IA 12 CLF 02 UC
M12	Long	Plug	2 mm <sup>1)</sup>	IA 12 CLF 02 UC M1
M12	Short	Cable	4 mm <sup>2)</sup>	IA 12 CSN 04 UC
M12	Short	Plug	4 mm <sup>2)</sup>	IA 12 CSN 04 UC M1
M12	Long	Cable	4 mm <sup>2)</sup>	IA 12 CLN 04 UC
M12	Long	Plug	4 mm <sup>2)</sup>	IA 12 CLN 04 UC M1
M18	Short	Cable	5 mm <sup>1)</sup>	IA 18 CSF 05 UC
M18	Short	Plug	5 mm <sup>1)</sup>	IA 18 CSF 05 UC M1
M18	Long	Cable	5 mm <sup>1)</sup>	IA 18 CLF 05 UC
M18	Long	Plug	5 mm <sup>1)</sup>	IA 18 CLF 05 UC M1
M18	Short	Cable	8 mm <sup>2)</sup>	IA 18 CSN 08 UC
M18	Short	Plug	8 mm <sup>2)</sup>	IA 18 CSN 08 UC M1
M18	Long	Cable	8 mm <sup>2)</sup>	IA 18 CLN 08 UC
M18	Long	Plug	8 mm <sup>2)</sup>	IA 18 CLN 08 UC M1
M30	Short	Cable	10 mm <sup>1)</sup>	IA 30 CSF 10 UC
M30	Short	Plug	10 mm <sup>1)</sup>	IA 30 CSF 10 UC M1
M30	Long	Cable	10 mm <sup>1)</sup>	IA 30 CLF 10 UC
M30	Long	Plug	10 mm <sup>1)</sup>	IA 30 CLF 10 UC M1
M30	Short	Cable	15 mm <sup>2)</sup>	IA 30 CSN 15 UC
M30	Short	Plug	15 mm <sup>2)</sup>	IA 30 CSN 15 UC M1
M30	Long	Cable	15 mm <sup>2)</sup>	IA 30 CLN 15 UC
M30	Long	Plug	15 mm <sup>2)</sup>	IA 30 CLN 15 UC M1

<sup>1)</sup> For flush mounting in metal

<sup>2)</sup> For non-flush mounting in metal



## Specifications

Rated operational volt. ( $U_e$ ) ( $U_B$ )	8.2 VDC 7 to 9 VDC (6 to 35 VDC, all specifications not observed in extended supply range)	Hysteresis (H) (Differential travel)	1 to 15% of sensing distance
Self-inductance	$\leq 500 \mu\text{H}$	Effective operating dist. ( $S_r$ )	$0.9 \times S_n \leq S_r \leq 1.1 \times S_n$
Self-capacitance	$\leq 120 \text{ nF}$	Usable operating dist. (S)	$0.9 \times S_r \leq S_u \leq 1.1 \times S_r$
No-load supply current ( $I_0$ )	Activated: $\leq 1 \text{ mA}$ Not activated: $\geq 2.2 \text{ mA}$ Max. 9.35 mA	Ambient temperature	Operating Storage
Protection	Reverse polarity	Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
Transient voltage	$\leq 1 \text{ kV}/0.5 \text{ J}$	Housing material	Body Back
EMC	Approved according to EN 50 080, EN 50 081	Connection	Grey thermoplastic polyester Black polyester
Power ON delay	$< 10 \text{ ms}$	Cable	2 m, 2 x 0.5 mm <sup>2</sup> , grey PVC, oil proof
Frequency of operating cycles (f)	IA12xxF02 1.400 Hz IA12xxN04 1.200 Hz IA18xxF05 500 Hz IA18xxN08 200 Hz IA30xxF10 300 Hz IA30xxN15 100 Hz	Plug	M12 x 1
Indication not activated	LED, yellow	Cables for plug (-1)	CONH1A serie
Assured operating dist. ( $S_a$ )	$0 \leq S_a \leq 0.81 S_n$	Weight (cable excluded)	IA 12xx 10 g IA 18xxF05 18 g IA 18xxN08 20 g IA 30xxF10 50 g IA 30xxN15 70 g
Repeat accuracy (R)	$\leq 5\%$	Tightening torque	IA 12 1.8 Nm IA 18 2.6 Nm IA 30 7.5 Nm
		Approvals	UL
		CE-marking	Yes

## Dimensions

Type	A	B Ø mm	C mm	D mm	E mm	F mm	SW mm
IA 12 CSF 02 UC	M12 x 1 x 30	10.7	30	11	5.0	8	17
IA 12 CLF 02 UC	M12 x 1 x 50	10.7	50	11	5.0	8	17
IA 12 CSF 02 UC M1	M12 x 1 x 30	10.7	30	12.6	11.9	8	17
IA 12 CLF 02 UC M1	M12 x 1 x 50	10.7	50	12.6	11.9	8	17
IA 12 CSN 04 UC	M12 x 1 x 30	10.7	34	11	5.0	8	17
IA 12 CLN 04 UC	M12 x 1 x 50	10.7	54	11	5.0	8	17
IA 12 CSN 04 UC M1	M12 x 1 x 30	10.7	34	12.6	11.9	8	17
IA 12 CLN 04 UC M1	M12 x 1 x 50	10.7	54	12.6	11.9	8	17
IA 18 CSF 05 UC	M18 x 1 x 30	16.7	30	11.6	15.4	8	24
IA 18 CLF 05 UC	M18 x 1 x 50	16.7	50	11.6	15.4	8	24
IA 18 CSF 05 UC M1	M18 x 1 x 30	16.7	30	13.1	11.9	8	24
IA 18 CLF 05 UC M1	M18 x 1 x 50	16.7	50	13.1	11.9	8	24
IA 18 CSN 08 UC	M18 x 1 x 30	16.7	38	11.6	15.4	8	24
IA 18 CLN 08 UC	M18 x 1 x 50	16.7	58	11.6	15.4	8	24
IA 18 CSN 08 UC M1	M18 x 1 x 30	16.7	38	13.1	11.9	8	24
IA 18 CLN 08 UC M1	M18 x 1 x 50	16.7	58	13.1	11.9	8	24
IA 30 CSF 10 UC	M30 x 1.5 x 30	28	30	13.6	15.4	10	36
IA 30 CLF 10 UC	M30 x 1.5 x 50	28	50	13.6	15.4	10	36
IA 30 CSF 10 UC M1	M30 x 1.5 x 30	28	30	13.6	11.9	10	36
IA 30 CLF 10 UC M1	M30 x 1.5 x 50	28	50	13.6	11.9	10	36
IA 30 CSN 15 UC	M30 x 1.5 x 30	28	42	13.6	15.4	10	36
IA 30 CLN 15 UC	M30 x 1.5 x 50	28	62	13.6	15.4	10	36
IA 30 CSN 15 UC M1	M30 x 1.5 x 30	28	42	13.6	11.9	10	36
IA 30 CLN 15 UC M1	M30 x 1.5 x 50	28	62	13.6	11.9	10	36