



# ICF12, ICF18, ICF30

## Full-Metal

Launch Presentation

February 2023

# ICF Inductive Sensor

## Contents



### INTRODUCTION

Why?  
What is it?

### THE PRODUCT

Technical Details  
Features & Benefits  
Selection

### APPLICATIONS

Market  
Application Examples  
Customer Needs

### CONCLUSIONS





# INTRODUCTION



# ICF Inductive Sensor

## Introduction

### What is it?

An inductive sensor family offering

- Reduced risk of physical damage due to a full stainless steel housing (including the sensing face)
- Excellent performance in F&B industry applications requiring washdown, extreme temperatures, and chemical resistance
- Additional insight due to new IO-Link features

### Why?

The existing ICS-FB family will be replaced by this new, higher performing ICF family. New capabilities within the ICF family will be beneficial and appealing to OEMs with food & beverage, pharmaceutical, agriculture, and machining applications. This new family will allow Carlo Gavazzi to gain inductive sensor market share.






# THE PRODUCT



# ICF Inductive Sensor

## Part Number

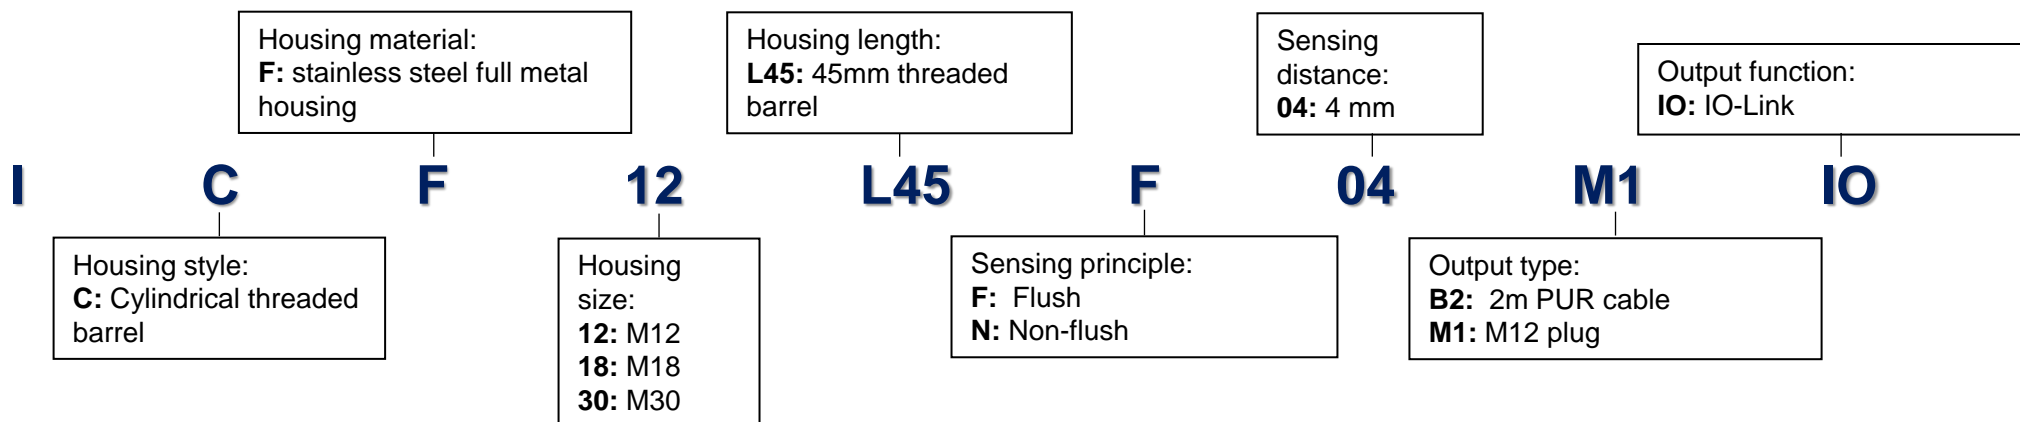


Housing	Mounting	Connection	Rated operating distance Sn	Output type	Ordering no.
M12	Flush	Cable	Configurable: 33%, 50%, 75% or 100% of the maximum Sn <b>Factory setting: 100%</b>	Configurable: NPN/PNP/push-pull NO/NC <b>Factory setting: PNP, NO</b>	<b>ICF12L45F04B2IO</b>
		Plug			<b>ICF12L45F04M1IO</b>
	Non-flush	Cable			<b>ICF12L45N08B2IO</b>
		Plug			<b>ICF12L45N08M1IO</b>
M18	Flush	Cable	Configurable: 33%, 50%, 75% or 100% of the maximum Sn <b>Factory setting: 100%</b>	Configurable: NPN/PNP/push-pull NO/NC <b>Factory setting: PNP, NO</b>	<b>ICF18L45F08B2IO</b>
		Plug			<b>ICF18L45F08M1IO</b>
	Non-flush	Cable			<b>ICF18L45N14B2IO</b>
		Plug			<b>ICF18L45N14M1IO</b>
M30	Flush	Cable	Configurable: 33%, 50%, 75% or 100% of the maximum Sn <b>Factory setting: 100%</b>	Configurable: NPN/PNP/push-pull NO/NC <b>Factory setting: PNP, NO</b>	<b>ICF30L45F15B2IO</b>
		Plug			<b>ICF30L45F15M1IO</b>
	Non-flush	Cable			<b>ICF30L45N22B2IO</b>
		Plug			<b>ICF30L45N22M1IO</b>

# ICF Inductive Sensor

## Reduction Factors

- The specific operating distance  $S_n$  refers to defined measuring conditions
- The following approximate reduction factors must be considered. The operating distance is **reduced by the use of metals and alloys** other than Fe360

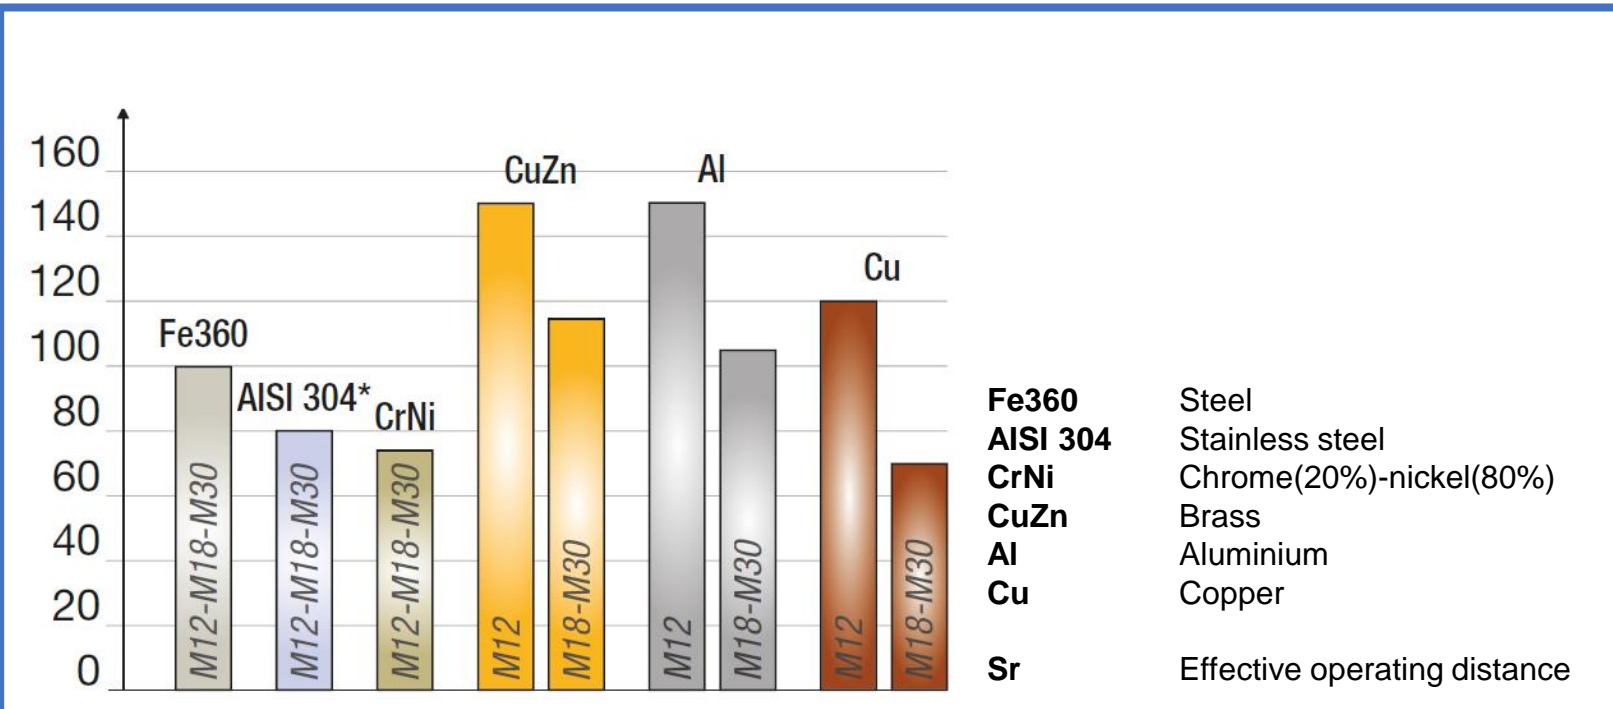

For Stainless steel the  $S_r$  depends on target thickness:


Sensor	Target thickness	$S_r$ (%)
ICF12 Flush	1 mm	75
	2 mm	105
ICF12 Non-flush	1 mm	10
	2 mm	60
ICF18 Flush	1 mm	80
	2 mm	100
ICF18 Non-flush	1 mm	60
	2 mm	90
ICF30 Flush	1 mm	50
	2 mm	70
ICF30 Non-flush	1 mm	30
	2 mm	50

# ICF Inductive Sensor

## Features




### Long Sensing Ranges

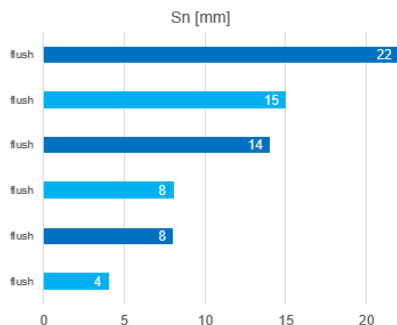


Long sensing ranges allow for safer operation so the moving target can be positioned farther away from the sensor

### Extended Temperature Range



Continuous operation between -40C to +85C (-40 to +185F); Resistant up to 100C for up to 15 minutes

### Ingress Protection IP68 & IP69K



- 10 to 15 cm from the nozzle
- 14 to 16 l/min
- 100 bar pressure
- 80 °C temperature
- 30s per position (total of 120 s)

### LED Monitoring



High visibility LEDs enable status checks. Visual adjustment indicator helps to ensure a safe detection of the target during the installation on the machine

### Traceability



Permanently legible laser engraved information on the housing to assure traceability

### Pressure on Sensing Face



Can withstand pressure on the sensing face

### Impact Resistant



1 J (EN 60068-2-75 Ehc test, vertical hammer) Drop the 100 g steel ball vertically from 1 m height onto the sensing surface for three times

### Vibration & Mechanical Shock Resistant



25 g (EN 60068-2-6 Fc) IK10 (EN 50102) Drop the 1000 g steel ball vertically from 2 m height onto the sensing surface for three times

### Shock Resistant



Shock resistance: 100 g Continuous shocks: 40 g (EN 60068-2-27 Ea)

### Certifications




CE, cULus, ECOLAB




# ICF Inductive Sensor

## IO-Link Basics

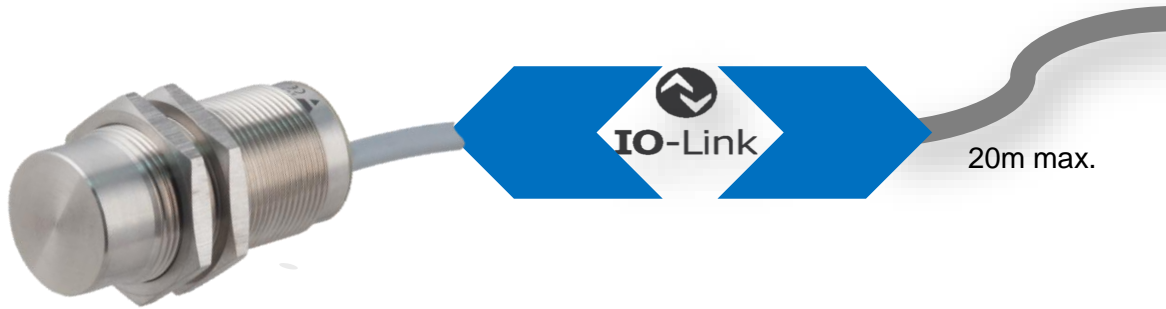

- ▼ Globally recognized communication protocol **IEC 61131-9**
- ▼ **Point-to-Point** serial communication interface
- ▼ Data transmission via a **standard, unshielded cable**

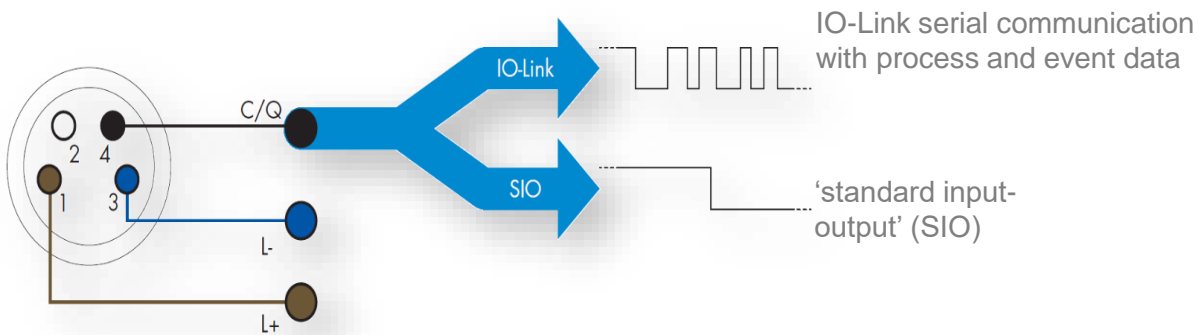

- ▼ Sensor waits for **'handshake'** signal from an IO-Link master
- ▼ If signal is not received, sensor operates in standard I/O **SIO mode**
- ▼ Still access to the **intelligence** inside the sensor in an IO-Link environment or traditional operation



- ▼ IO-Link communication between sensor and master:
  - ▼ Cyclical = process data & value status – exchanged regularly
  - ▼ Acyclical data = parameter configuration, identification data, diagnostic information and events (errors messages and warnings) – exchanged upon request

# ICF Inductive Sensor

## 1) Configurable Sensors



Output	<ul style="list-style-type: none"><li>• Logic: normally open / normally closed</li><li>• Mode: PNP, NPN, push-pull</li></ul>
Sensing Mode	<ul style="list-style-type: none"><li>• Single point, window, or two point</li></ul>
Sensing Setpoint	<ul style="list-style-type: none"><li>• 33% / 50% / 75% / 100% of sensing range</li></ul>
Frequency Setpoint	<ul style="list-style-type: none"><li>• 1 to 7000 Hz</li></ul>
Hysteresis	<ul style="list-style-type: none"><li>• Standard ~ 10% or Extended ~ 20%</li></ul>
LED Indication	<ul style="list-style-type: none"><li>• Inactive, active, find my sensor</li></ul>
Timers	<ul style="list-style-type: none"><li>• Disabled, T-ON delay, T-OFF delay, T-ON &amp; T-OFF delay, one-shot leading edge, one-shot trailing edge</li><li>• 1 to 32767 milliseconds / seconds / minutes</li></ul>
Temp Alarm	<ul style="list-style-type: none"><li>• Warning and fault events</li><li>• Min and max thresholds for temperature alarm</li><li>• -32768 to +32767 deg C</li></ul>
Event Configurator	<ul style="list-style-type: none"><li>• Selection of IO-Link event data</li></ul>
Divider Operation	<ul style="list-style-type: none"><li>• 1 to 32767</li></ul>
Process Data	<ul style="list-style-type: none"><li>• Selection of active process data</li></ul>

# ICF Inductive Sensor

## 2) Advanced Detection




### TEMPERATURE ALARM

- ▼ Temperature is constantly monitored inside the sensor (will always be higher than ambient)
- ▼ Alarm sent if temperature exceeds the individually set max or min alarm levels
- ▼ When temperature alarm is triggered, the sensor will show this both an IO-Link event and by LED (even in SIO mode if temperature alarm is enabled)
- ▼ Change in temperature of a single or multiple sensors can give early warning of a larger issue (blocked fan, broken AC, etc.)


### ACTIVATION LEVEL

- ▼ Rough indication of target position via an 8 bit analog value (0-20 range)
- ▼ Target out of the sensing range = 0
- ▼ Target enters sensing range = 1
- ▼ Larger values (up to 20) indicate the target is closer to the sensing face

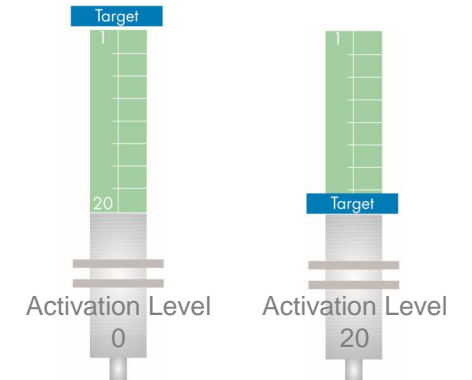

### LOW MARGIN ALARM

- ▼ Recommended working range for stable operation of an inductive sensor is less than 80% of the nominal sensing range in order to accommodate environmental changes or voltage fluctuations
- ▼ High value 1 = target is beyond the recommended working range (between 81% - 100%)
- ▼ Low value 0 = target is within recommended working range (between 0 – 80%)

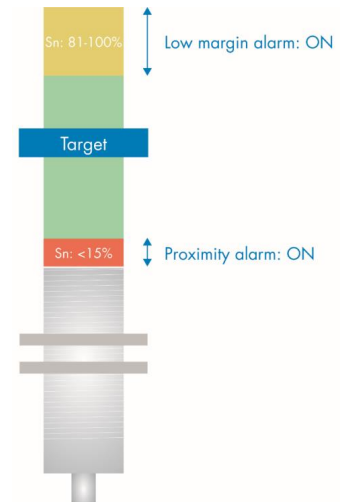

### PROXIMITY ALARM

- ▼ High value 1 = target is veery close to the sensing face



### DETECTION MODE

- Presence Detection – presence of a metal target
- Frequency Detection - control the speed of a revolving or cycling target

### SWITCHING MODE

- Single point
- Two point
- Window

### TIME DELAY

- Units set in ms, sec, or min with values from 1 to 32,767
- On delay, off delay, on delay & off delay, one-shot leading edge, one-shot trailing edge, direct (no delays)

### OUTPUT INVERTER

- Normally open (NO)
- Normally closed (NC)

### OUTPUT

- PNP, NPN, push-pull, disabled

## 4) Automatic Parameter Setting



- ▼ **Device identification** – sensor parameters / configurations and unique internal ID can be accessed via IO-Link
- ▼ **Automatic parameter settings** – setup of a new sensor is smooth and easy using previously stored parameters. Once a sensor has been replaced, the IO-Link master transmits parameters stored from the previous sensor.



**YL2... & YN1...**  
IO-Link Masters

# ICF Inductive Sensor

## 5) Advanced Diagnostics



Max & Min  
Temperatures

- Highest and lowest internal temperatures since start-up
- Current internal temperature

Detection  
Counter

- Number of detections made by sensor since start-up

Switching  
Frequency

- Frequency at which the sensor is activated



- ▼ **Backwards compatible** – can be used in a traditional or IO-Link environment
- ▼ **Manufacturer independent** – IO-Link globally recognized communication standard; IO-Link master and sensors can be mixed and matched
- ▼ **Fieldbus independent** – IO-Link masters are a ‘translator’ giving visibility into sensor intelligence to industry-leading protocols (EtherNet/IP, PROFINET IO, MODBUS TCP, and OPC UA to the cloud)



**YL2... & YN1...**  
IO-Link Masters



**SCTL55**  
IO-Link Configurator



### Divider Function

- ▼ Allows the user to setup how many activation are needed to change the output
- ▼ If a gear has 8 teeth and the sensor divider is set to 8, the output will change each time the gear has completed a full revolution. When combined with time, this allows the user to directly measure the speed of a gear with a cost effective inductive sensor.





# ICF Inductive Sensor

## 8) Predictive Maintenance


### Predictive Maintenance

Condition monitoring of detection quality through

- ▼ Proximity alarm
- ▼ Low margin alarm
- ▼ Activation level
- ▼ Temperature monitoring
- ▼ Over-speed and under-speed detection



Allow customers to predict and schedule maintenance prior to sensor failure

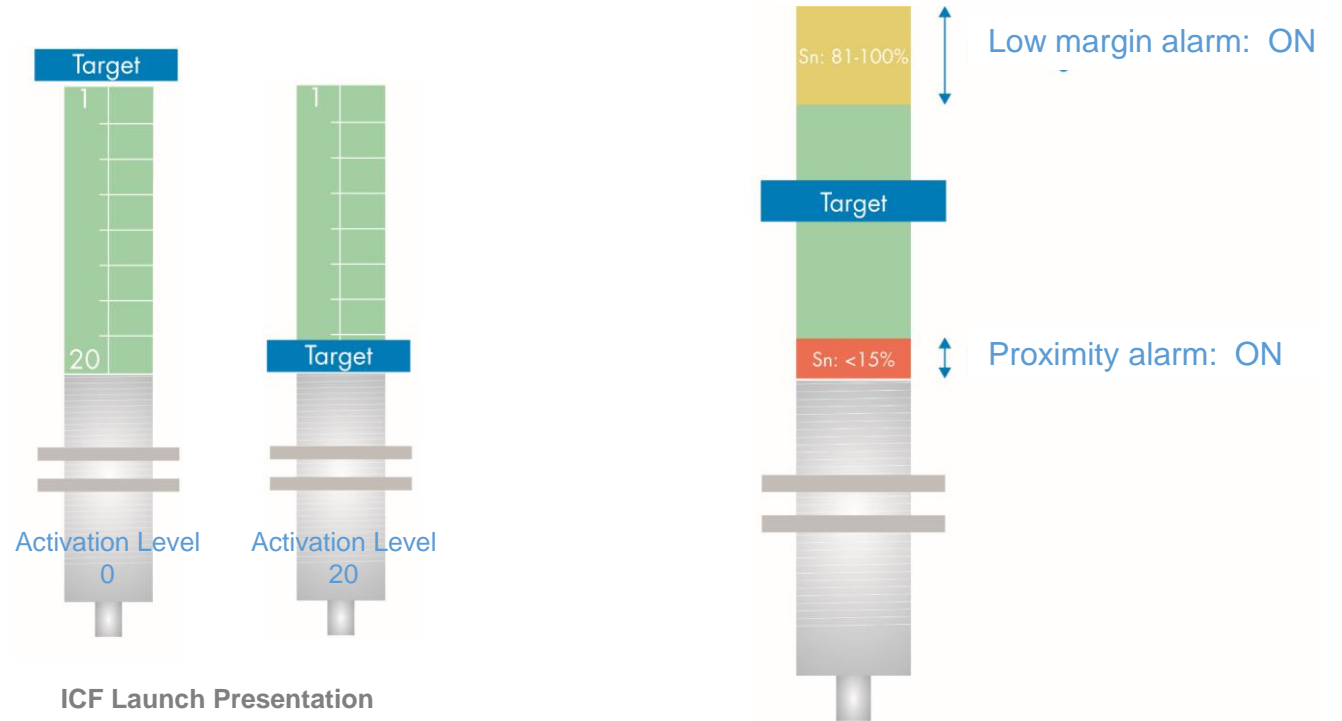



# APPLICATIONS



# ICF Inductive Sensor

## Industries & Applications



Machine Tool



Food & Beverage



Agriculture



Pharmaceutical



Mobile Equipment



Metal Working

# ICF Inductive Sensor

## Application Examples – Food & Beverage Conveyors



### Customer Need

The food industry requires a high level of hygiene and cleanliness in equipment that must withstand daily wash-downs at high temperatures, high pressure cleaning and harsh detergents.

Benefit	ICF Sensor Feature
Longer lifetime due to the ability to withstand extreme conditions (exposure to chemicals, cleaning, extended temperature ranges)	<ul style="list-style-type: none"><li>- Extended temperature range (-40 to 85C and even short exposures of 15min at 100C)</li><li>- Pressure on sensing face (260 bar for M12, 200 bar for M18, 100 bar for M30 housing)</li><li>- Washdown capabilities (IP68, IP69K)</li><li>- Ecolab approved</li></ul>
Increased uptime due to intelligent monitoring	<ul style="list-style-type: none"><li>- Temperature alarm for over or under monitoring</li><li>- IO-Link cyclic process data can monitor quality of the detection</li><li>- Ability to activate 'find my sensor' via IO-Link to quickly identify specific sensors</li></ul>
Prevent machine downtime	<ul style="list-style-type: none"><li>- IO-Link cyclic process data monitors the quality of detection allowing predictable maintenance scheduling</li><li>- Clearly visible LEDs with diagnostic functions</li><li>- Extended sensing range up to 22mm allows the target to be positioned farther away from the moving target</li></ul>
Higher efficiency / quality production	<ul style="list-style-type: none"><li>- Accurate and reliable detection across a wide temperature range due to advanced microprocessor-based electronics</li><li>- Ability to customize output, timers, sensing range, etc. due to IO-Link</li></ul>

# ICF Inductive Sensor

## Application Examples – Agriculture



### Customer Need

Agricultural machinery needs reliable and durable parts and components able to work long hours in difficult outdoor conditions, exposed to every kind of stress. The harsh environmental conditions, such as high vibration, could damage the sensor causing the machine to stop.

Benefit	ICF Sensor Feature
Longer lifetime due to the ability to withstand extreme conditions (exposure to chemicals, cleaning, extended temperature ranges)	<ul style="list-style-type: none"> <li>- Extended temperature range (-40 to 85C )</li> <li>- Pressure on sensing face (260 bar for M12, 200 bar for M18, 100 bar for M30 housing)</li> <li>- Impact resistance up to 1 J due to single piece stainless steel AISI304 housing</li> <li>- Increased shock (100g) and vibration (25g) resistance</li> <li>- Washdown capabilities (IP68, IP69K)</li> </ul>
Prevent machine downtime	<ul style="list-style-type: none"> <li>- Clearly visible LEDs with diagnostic functions</li> <li>- Extended sensing range up to 22mm allows the target to be positioned farther away from the moving target</li> </ul>
Higher efficiency / quality production	<ul style="list-style-type: none"> <li>- Accurate and reliable detection across a wide temperature range due to advanced microprocessor-based electronics</li> <li>- Ability to customize output, timers, sensing range, etc. due to IO-Link</li> </ul>

# ICF Inductive Sensor

## Application Examples – CNC Machine Tooling



### Customer Need

The production of automated doors requires a metal working machine where the metal sheet is cut, folded, perforated, often with coolant flow under pressure. The maintenance of this machine is a fundamental part of the production of casing / chassis.

Benefit	ICF Sensor Feature
Longer lifetime due to the ability to withstand extreme conditions (exposure to chemicals, cleaning, extended temperature ranges)	<ul style="list-style-type: none"> <li>- Extended temperature range (-40 to 85C and even short exposures of 15min at 100C)</li> <li>- Pressure on sensing face (260 bar for M12, 200 bar for M18, 100 bar for M30 housing)</li> <li>- Impact resistance up to 1 J due to single piece stainless steel AISI304 housing</li> <li>- Increased shock (100g) and vibration (25g) resistance</li> <li>- Washdown capabilities (IP68, IP69K)</li> </ul>
Increased uptime due to intelligent monitoring	<ul style="list-style-type: none"> <li>- Proximity alarm if a target is too close to sensing face</li> <li>- Low margin alarm if a target is too far away from the sensing face</li> <li>- Activation level provides an analog estimation of target position</li> <li>- Temperature alarm for over or under monitoring</li> <li>- Cyclic process data can monitor quality of the detection</li> <li>- Ability to activate 'find my sensor' via IO-Link to quickly identify specific sensors</li> </ul>
Prevent machine downtime	<ul style="list-style-type: none"> <li>- IO-Link cyclic process data monitors the quality of detection allowing predictable maintenance scheduling</li> <li>- Clearly visible LEDs with diagnostic functions</li> <li>- Extended sensing range up to 22mm allows the target to be positioned farther away from the moving target</li> </ul>
Higher efficiency / quality production	<ul style="list-style-type: none"> <li>- Accurate and reliable detection across a wide temperature range due to advanced microprocessor-based electronics</li> <li>- Ability to customize output, timers, sensing range, etc. due to IO-Link</li> </ul>



## CONCLUSIONS



# ICF Inductive Sensor

## Features & Benefits

### Customer issue

### Our solution – ICF

### Achieved benefits



Stringent cleaning requirements in F&B industry with detergents and disinfectants

IP68 and IP69K protection degree and Ecolab Certified

Sensor capable of withstanding vigorous cleaning processes at high temp and pressure



Understand sensor status or ongoing issues such as overload / short-circuit

**High visibility LEDs** for status/ power/ overload/ short circuit

Clearly visible switching and operating status from for easy identification and diagnostics



Damaged sensors due to high pressure and high temperature washdown cycles

IP69K and can withstand short exposure (15min) at 100°C for cleaning processes

Reliable detection even with frequent and hard washdown cycles



Moving parts & mechanical tolerances cause the sensors to be hit by the target

Extended sensing distance **up to 22 mm** allows sensor to be positioned further away from the moving target

Longer installation tolerances allow better protection. Longer life-time and reduced downtime



Very low and high temps stress sensor components, reducing machine uptime

Continuous operation in extreme temperatures from **-40 to +85°C**

Reliable detection even in harsh winter and when installed next to a hot source



Moving parts & mechanical tolerances cause sensors to be hit by the metal target or an object

Sensor face resistant up to **260 bar** pressure for M12, **200 bar** for M18 and **100 bar** for M30 versions

Further mechanical protection of the sensor thanks to the high impact resistance. Longer life-time and lower downtime



Challenging to find the position of the sensor in a wide/complex installation

Via IO-Link it is possible to activate “**find my sensor**” option and make the sensor visible thanks to the blinking LEDs

Avoid wasting time searching the desired sensor and increase machine uptime



Moving parts & mechanical tolerances cause the sensors to be hit by the metal target or an object

Via IO-link the following process data are available: low margin alarm, proximity alarm and activation level

Machine condition monitoring implementation