

ICP331319PM

Rechargeable Lithium Ion Polymer Battery Cell 3.7 V
Safety Circuit

Specifications

Renata Type	ICP331319
IEC Designation	ICP041321
Part Number	100735
Contact Method:	Wire
Safety Circuit	Yes

Nominal Voltage	3.7 V
Nominal Capacity	50 mAh
Minimum Capacity	45 mAh (0.2C cut off 3.0 V at 20°C)

Internal Impedance < 730 mΩ / 3+0% SOC

Thickness (t)	Max 3.75 mm
Length (l)	Max 20.3 mm
Width (w)	Max 12.6 mm
Weight	~ 2.0 g

Charging Characteristic

Charging Characteristic	CC/CV – Constant Current / Constant Voltage
Voltage	4.2 V CV
Current Normal	0.5 C CC – 25.0 mA
Max. Charging Current	1.0 C CC – 50 mA
Temperature at Charging	0 °C 45 °C


Discharge Characteristic

Cut off Voltage	3.0 V
Max Discharge Current	2.0 C – 100 mA (for non continues discharge) 1.0 C – 50 mA (for continues discharge)
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature > 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)

Storage Temperature -20 °C ... 45 °C
(0 °C ... 30 °C recommended in case of storage for more than 3 months)

Dimensions

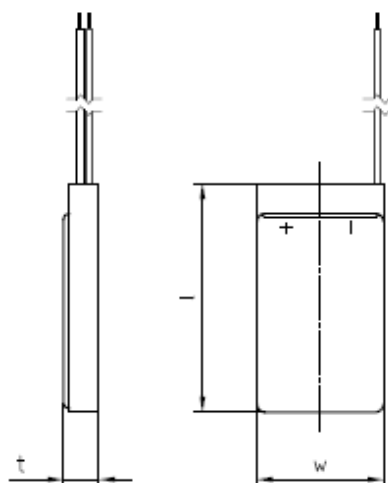

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative.

Rev. Li Ion ICP331319 V01- 17-07