

# ILS series

## Submersible Level Transmitter



- **Stainless steel, piezo-resistive sensor**
- **Accuracy: <0.1% FS BFSL**
- **Pressure ranges from 1mWG to 100mWG**
- **Various cable lengths**

### Suitable applications

River level  
 Reservoir level  
 Tank level  
 Borehole level  
 Aquifer level  
 Environmental monitoring  
 V-notch weir flow measurement

### Performance

Accuracy (Non-Linearity & Hysteresis) <math>\lt; \pm 0.1\% / FS (BFSL)</math>  
 Setting Errors (offsets) Zero & Full Scale, <math>\lt; \pm 0.5\% / FS</math>  
 Permissible Load  $R_{max} = [(Voltage\ Supply - 9) / 0.02] 0hms</math>  
 Influence Effects Supply <math>\lt; 0.005\% FS / 1V</math>  
 Load 0.05% FSO / kOhm$

### Input Pressure Range

Nominal Pressure, Gauge	mWG	1	2.5	5	10	20	50	100
Permissible Overpressure	mWG	20	20	50	50	50	100	100

### Output Signals and Supply Voltages

Output Signals and Supply Voltages			PUR sheath	
Wire system Output	Supply Voltage	Connection	Wire Colours	
2-wire 4-20mA	9-32Vdc	+ve Supply	Red	
		-ve Supply	Blue	
		Ground	White	
		Cable Screen	Green	

The ILS is designed for use in continuous submersion in liquids such as water, oil and other non-aggressive chemicals. The submersible uses the latest piezo-resistive media-isolated silicon sensing technology and a stainless steel diaphragm within a 316L stainless steel housing.

It offers excellent stability, repeatability and resolution, as required for use in rivers and reservoirs. This submersible level transmitter is the ideal product for reliable and repeatable hydrostatic level measurement.

The electronics incorporate a microprocessor based amplifier, requiring no adjusting and giving stable electronics.

Each device is temperature compensated, calibrated and supplied with a traceable serial number and calibration data.\*

\*Calibration data is supplied as a sticker affixed to the product packaging - do not discard

Custom versions can be made for particular applications.

Cynergy3 Components Ltd.  
 7 Cobham Road  
 Ferndown Industrial Estate  
 Wimborne, Dorset BH21 7PE  
 Telephone +44 (0) 1202 897969  
 Email: [sales@cynergy3.com](mailto:sales@cynergy3.com)  
 Web: [www.cynergy3.com](http://www.cynergy3.com)

ISO9001 CERTIFIED  
 ILS 2018



[www.cynergy3.com](http://www.cynergy3.com)

# ILS series

## Submersible Level Transmitter

### Electrical Protection

Supply reverse polarity protection	No damage/no function
Lightning protection	Internally fitted
Electromagnetic compatibility	CE Compliant

### Mechanical Stability

Shock	100g / 11ms
Vibration	10g RMS (20 - 2000Hz)

### Temperature & Thermal Effects

Media temperature	-20°C (Non-freezing) to +60°C
Storage temperature	-20°C to +70°C
Compensated temperature range	20°C±25°C
Thermal zero shift (TZS)	<±0.02%/FS/°C
Thermal span shift (TSS)	<±0.01%/°C


### Material Specifications

Housing	316L Stainless Steel
"O" ring seals	Viton
Diaphragm	316L Stainless Steel
Cable sheath material	PUR
Media wetted parts	Housing, "O" ring seal, diaphragm & cable sheath

### Miscellaneous

Weight	Transmitter: approx 250g Cable: 48g per metre
Current consumption	Limits at 28mA
Installation position	Any, small zero shift when tilted through 90°
Operational life	> 100x 10 <sup>6</sup> cycles

Part No	Pressure Range	Cable Length	Output
ILS-G0100-003	0-1mWG (0-39"WG)	3M	4-20mA
ILS-G0250-005	0-2.5mWG (0-98"WG)	5M	4-20mA
ILS-G0500-007	0-5mWG (0-197"WG)	7M	4-20mA
ILS-G1000-015	0-10mWG (0-394"WG)	15M	4-20mA
ILS-G2000-025	0-20mWG (0-788"WG)	25M	4-20mA
ILS-G5000-060	0-50mWG (0-1970"WG)	60M	4-20mA
ILS-G1002-110	0-100mWG (0-3940"WG)	110M	4-20mA

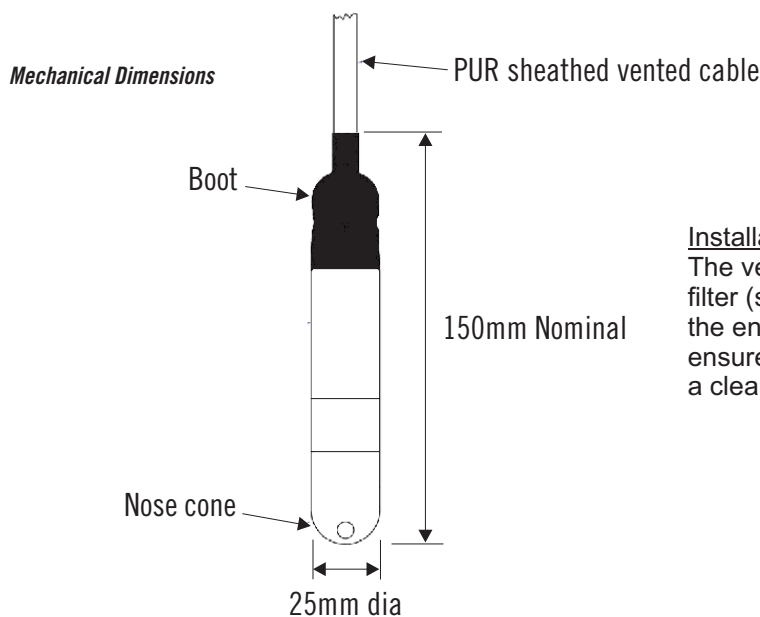

### Installation Note.

The vented cable is fitted with a filter (shown below) to prevent the entry of moisture. If removed, ensure vent tube is positioned in a clean, dry area.

