

IMC-P111FX Series

IMC-P111P Series



IMC-P111FX Series



IMC-P111P Series

➤ **Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) to 1x100Base-FX fiber or 1x100Base-FX SFP socket**

Features


- Designed for Railway application and fully compliant with the requirement of IEC 61850-3 and IEEE 1613
- Supports 1 port 10/100Base-T(X) auto-negotiation and auto-MDI/MDI-X
- Support Ethernet to fiber or Ethernet to SFP port
- Support **LFP (Link Fault Pass-through)** function
- Supports full/half duplex operation
- Supports store and forward transmission
- Supports relay output for power failed alarm
- Provided DIP-Switch to setting function
- High reliability and rigid IP-30 housing
- DIN-Rail and wall mounting enabled



Introduction

IMC-P111 series is a cost-effective solution for the conversion between 10/100Base-T(X) and 100Base-FX interface; it allows you to extend communication distance by optical fiber. IMC-P111 series are designed for power substation application and rolling stock application, fully compliant with the requirement of IEC 61850-3 and IEEE 1613. IMC-P111 series supports MDI/MDIX auto detection, so you don't need to use crossover wires. IMC-P111 series with wide operating temperature range from -40 ~ 85^oC and accepts a wide voltage range power inputs, so it is suitable for harsh operating environments.

IMC-P111 series also support the **LFP (Link Fault Pass-through)** feature. When one side of the link fails, the other side continues transmitting packets, and waiting for a response that never arrives from the disconnected side. Use the DIP-Switch to enable the LFP function, then IMC-P111 series will force the link to shutdown as soon as noticed that the other link has failed, giving the application software a chance to react to the situation. Therefore, the IMC-P111 series is reliable media converter and can satisfy most demand of power substation and rolling stock application.

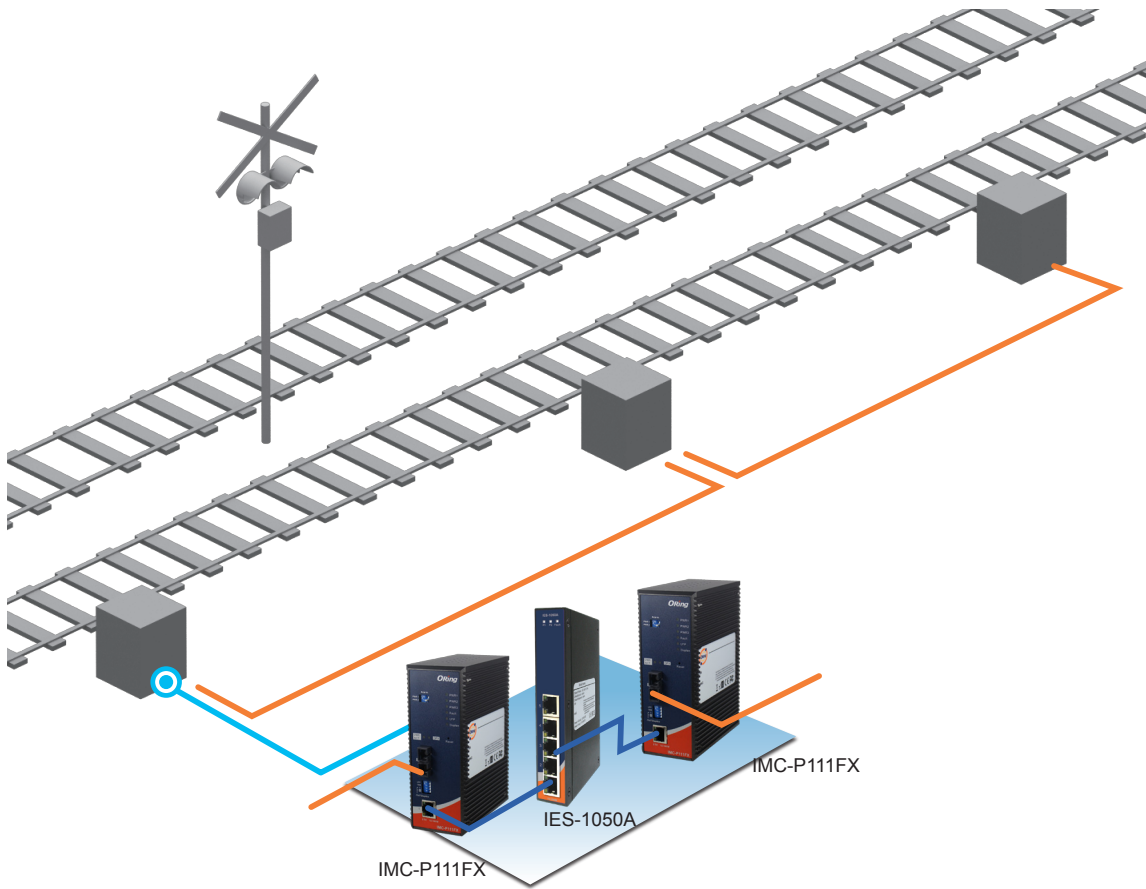

Industrial Ethernet Switch

Industrial Media Converter

Industrial Device Server

Industrial Wireless Access Point

Industrial Cellular VPN Router






Industrial M2M Gateway

Accessories






Network Management Software

Dimensions

IMC-P111-LV Series

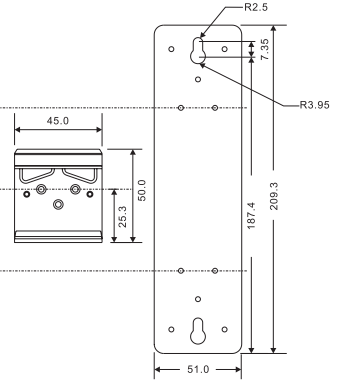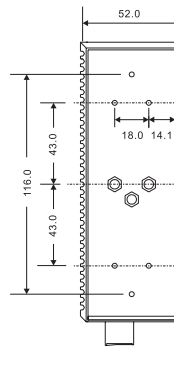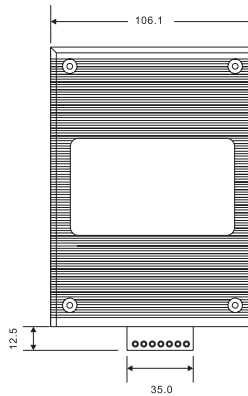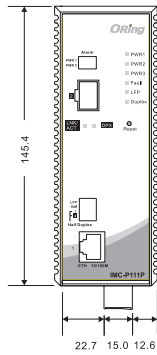

IMC-P111-HV Series

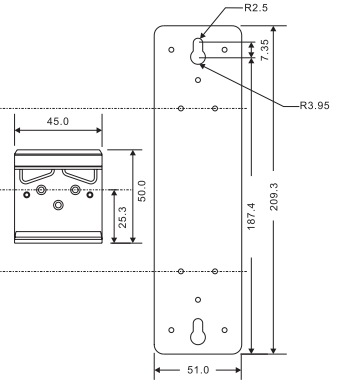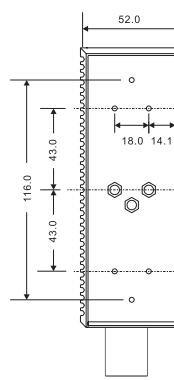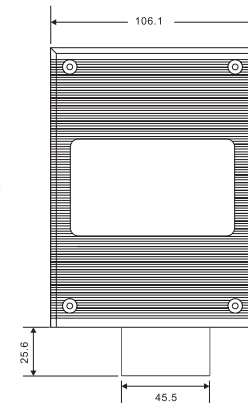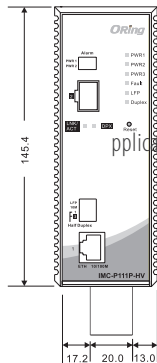

(Unit=mm)

Specifications

| ORing Media Converter Model | | IMC-P111FX-MM | IMC-P111FX-SS | IMC-P111P |
|---|---|--|--|--|
| Physical Ports | | | | |
| 10/100Base-T(X) Ports in RJ45 Auto MDI/MDIX | | 1 | 1 | 1 |
| Fiber Port Specification | Fiber Ports Number | 1 | 1 | - |
| | Fiber Ports Standard | 100Base-FX | 100Base-FX | - |
| | Fiber Mode | Multi-mode | Single-mode | - |
| | Fiber Diameter (μm) | 62.5/125 μm 50/125 μm | 9/125 μm | - |
| | Fiber Optical Connector | SC | SC | - |
| | Typical Distance (Km) | 2 Km | 30 Km | - |
| | Wavelength (nm) | 1310 nm | 1310 nm | - |
| | Max. Output Optical Power (dbm) | -14 dbm | -8 dbm | - |
| | Min. Output Optical Power (dbm) | -23.5 dbm | -15 dbm | - |
| | Max. Input Optical Power (Saturation) | 0 dbm | 0 dbm | - |
| | Min. Input Optical Power (Sensitivity) | -31 dbm | -34 dbm | - |
| | Link Budget (db) | 7.5 db | 19 db | - |
| 100Base-FX SFP port | | - | - | 1 |
| Technology | | | | |
| Ethernet Standards | IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-T(X) and 100Base-FX IEEE 802.3x for Flow control | | | |
| Processing | Store-and-Forward | | | |
| DIP-Switch setting | DIP-Switch 1 for LFP mode selection : (ON) enable / (OFF) disable DIP-Switch 2 for Ethernet speed selection : (ON) 10Mbps / (OFF) 10/100Mbps Auto-negotiate DIP-Switch 3 for Ethernet full/half duplex selection : (ON) Half-duplex / (OFF) Full/Half-Duplex Auto-negotiate DIP-Switch 4 for fiber full/half duplex selection : (ON) Half-Duplex / (OFF) Full-Duplex | | | |
| Alarm DIP-Switch | | | | |
| DIP-Switch 1 | Power-1 failed warning : (ON) enable, (OFF) disable | | | |
| DIP-Switch 2 | Power-2 failed warning : (ON) enable, (OFF) disable | | | |
| LED Indicators | | | | |
| Power Indicator | Green : Power LED x 3 (ON : power input on-line / (OFF) power input off-line | | | |
| 10/100Base-T(X) RJ45 port indicator | Green for port Link/Act – (ON) Link up / (Blinking) Acting / (OFF) Link down Amber for port duplex indicator – (ON) Full-Duplex / (OFF) Half-Duplex | | | |
| 100Base-FX fiber port indicator | Green for fiber port Link/Act – (ON) Link up / (Flash) Acting / (OFF) Link down Amber for fiber port duplex indicator – (ON) Full-Duplex / (OFF) Half-Duplex | | | |
| LFP statue indicator | Amber LED – (ON) LFP function fail / (OFF) LFP function disable | | | |
| Fault indicator | Amber : Indicate unexpected event occurred | | | |
| Duplex indicator | Green for port duplex indicator – (ON) Full-Duplex / (OFF) Half-Duplex | | | |
| Power | | | | |
| LV Model Input Power | Triple DC inputs. Dual 12~48VDC on 7-pin terminal block, one 12~45VDC on power jack | | | |
| HV Model Input Power | Dual 100~240VAC power inputs on 8-pin terminal block | | | |
| Power consumption (Typ.) | LV model : 12 Watts, HV model : 100VAC/4.8Watts, 240VAC/5.8Watts) | LV model : 12 Watts HV model : 100VAC/4.8Watts, 240VAC/5.8Watts) | LV model : 12 Watts HV model : 100VAC/4.8Watts, 240VAC/5.8Watts) | LV model : 12 Watts HV model : 100VAC/4.8Watts, 240VAC/5.8Watts) |
| Overload current protection | Present | | | |
| Reverse polarity protection | Present on terminal block | | | |

| Physical Characteristic | | | |
|-------------------------|--|--------------------------------------|-------------------------------------|
| Enclosure | IP-30 | | |
| Dimension (W x D x H) | 52(W)x106.1(D)x144.3(H) mm (2.05x4.18x5.68 inch.) | | |
| Weight (g) | LV model : 660 g HL model : 802 g | LV model : 660 g HL model : 802 g | LV model : 650g HV model : 792g |
| Environmental | | | |
| Storage Temperature | -40 to 85°C (-40 to 185°F) | | |
| Operating Temperature | -40 to 85°C (-40 to 185°F) | | |
| Operating Humidity | 5% to 95% Non-condensing | | |
| Regulatory approvals | | | |
| EMC | CE EMC (EN 55024, EN 55032), IEC 61850/IEEE1613, FCC Part 15 B | | |
| EMI | EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A | | |
| EMS | EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP)) | | |
| Shock | IEC60068-2-27 | | |
| Free Fall | IEC60068-2-31 | | |
| Vibration | IEC60068-2-6 | | |
| Safety | EN60950-1 | | |
| MTBF | -HV: 871329 hrs -LV: 602979 hrs | -HV: 779622 hrs -LV: 509133 hrs | -HV: 1401738 hrs -LV: 816887 hrs |
| Warranty | 5 years | | |

Ordering Information

IMC-P1 **AB** **CC** - **DD** **EE**

| Code Definition | 10/100Base-T(X) Port Number | 100Base-FX Fiber Port Number | Fiber Port Type | Fiber Optical Mode | Fiber Optical Connector |
|-----------------|-----------------------------|------------------------------|---|---|----------------------------|
| Option | - 1 : 1 port | - 1 : 1 ports | - FX : 100Base-FX fiber - P : 100Base-FX SFP | - MM : Multi-mode - SS : Single-mode | - SC : SC connector |

| Available Model | Model Name | Description |
|-----------------|------------------------|--|
| | IMC-P111FX-MM-SC-LV | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, multi-mode, 2Km/1310nm, SC connector, low-voltage power inputs |
| | IMC-P111FX-SS-SC-LV | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, single-mode, 30Km/1310nm, SC connector, low-voltage power inputs |
| | IMC-P111FX-MM-SC-HV_US | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, US power cord |
| | IMC-P111FX-SS-SC-HV_US | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, UK power cord |
| | IMC-P111FX-MM-SC-HV_UK | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, SFP socket, low-voltage power inputs |
| | IMC-P111FX-SS-SC-HV_UK | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, single-mode, 30Km/1310nm, SC connector, high-voltage power inputs, UK power cord |
| | IMC-P111FX-MM-SC-HV_EU | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, EU power cord |
| | IMC-P111FX-SS-SC-HV_EU | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, single-mode, 30Km/1310nm, SC connector, high-voltage power inputs, EU power cord |
| | IMC-P111FX-MM-SC-HV_JP | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, JP power cord |
| | IMC-P111FX-SS-SC-HV_JP | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, single-mode, 30Km/1310nm, SC connector, high-voltage power inputs, JP power cord |
| | IMC-P111P-LV | Industrial IEC 61850-3 Ethernet to fiber media converter with 1x10/100Base-T(X) and 1x100Base-FX, SFP socket, low-voltage power inputs |