


5.4" [137 mm]




3.7" [95 mm]

The model IT9420 is a rugged yet simple device which provides a 4 to 20 mA current feedback signal for incline position. The heart of the IT9420 is a magnetically-damped pendulum coupled to a conductive plastic precision potentiometer. A highly linear relationship between inclination and a 4 to 20 mA output is maintained over the full range of the IT9420.

The IT9420 is easy to use: simply attach it to the object of measurement and install two wires for the current loop.

Output Signal

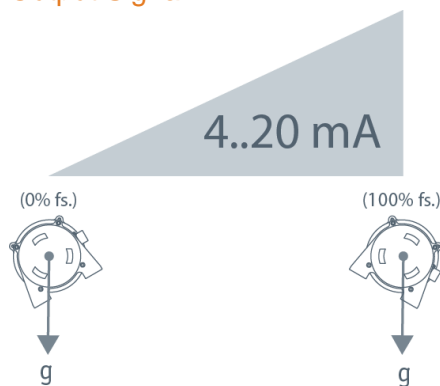

IT9420

Inclinometer • 4..20 mA

Measuring Range Options from 0-45° to 0-240°

Aluminum or Stainless Steel Enclosure Options

Perfect for Water Management/ Tainter Gate Position

IP68 • NEMA 6 Protection • Hazardous Area Certification

General

Available Full Stroke Ranges	0-45 to 0-240 degrees
Weight (aluminum enclosure)	5 lb. typical (aluminum enclosure)
Enclosure Material	aluminum (stainless steel available)
Sensor	precision potentiometer
Electrical Connector	MS3102E-14S-6P
Mating Plug (included)	MS3106E-14S-6S

Electrical

Output Signal	4..20 mA
Input Voltage	see ordering information
Input Current	20 mA max.
Circuit Protection	38 mA maximum

Performance

Sensitivity	16 mA/full stroke, $\pm 0.25\%$
Accuracy*	$\pm 1\%$ full stroke
Accuracy Option	0.5% full stroke (please contact factory)
Resolution	essentially infinite

Full Stroke Ranges of 45° - 105°

Zero Adjustment	from factory set zero to 20% of full stroke range
Span Adjustment	to 20% of factory set span

Full Stroke Ranges of 120° - 240°

Zero Adjustment	from factory set zero to 40% of full stroke range
Span Adjustment	to 40% of factory set span

*—when plane of pendulum motion parallel to plane of rotation within $\pm 3^\circ$


Environmental

Enclosure	NEMA 4/4X/6, IP 67/68
Hazardous Area Certification	see ordering information
Operating Temperature	-30° to 200°F (-34° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

IT9420

Inclinometer • 4..20 mA

Outline Drawing

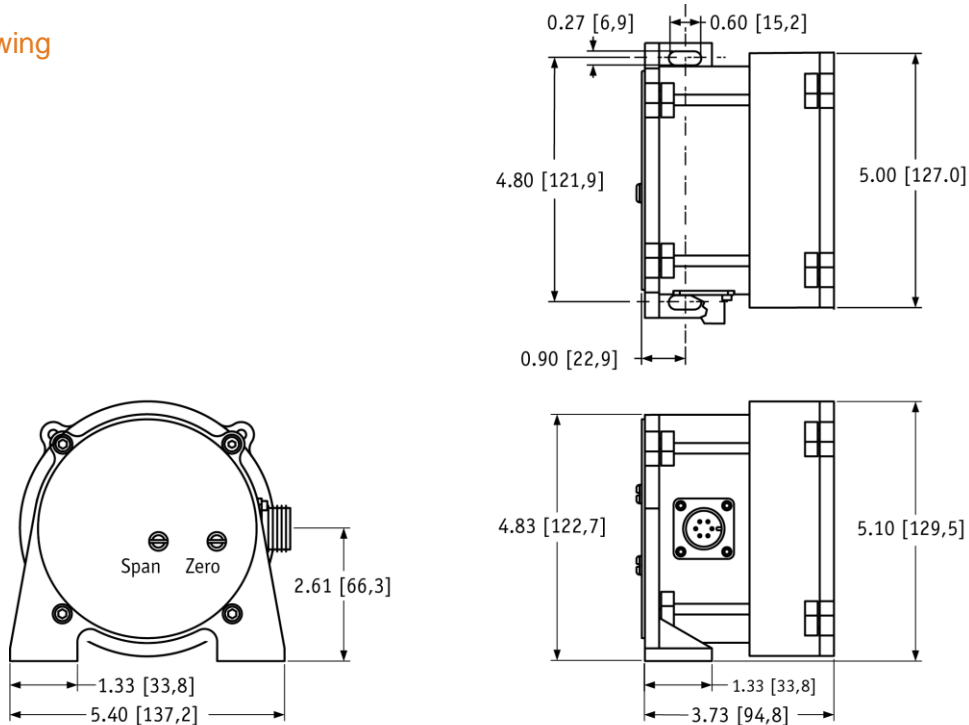

DIMENSIONS ARE IN INCHES [MM]
tolerances are ±0.02 in. [±0,5 mm] unless otherwise noted

Ordering Information

Model Number:

IT9420 - - - - - - - -
order code: **CW** **CCW** **A** **B** **C** **D**


Sample Model Number:

IT9420 - 060 - 120 - 1110

- | | | |
|--|-----------------------------------|-------------------------|
| CW clockwise rotation: | 60° | } total rotation = 180° |
| CCW counter-clockwise rotation: | 120° | |
| A enclosure: | aluminum | |
| B output signal: | 4 mA @ 120° CCW
20 mA @ 60° CW | |
| C electrical connection: | 6-pin plastic connector | |
| D magnetic dampening: | yes | |

Full Clockwise Rotation:


CW order code:	000	015	030	045	060	075	090	105	120
	0°	15°	30°	45°	60°	75°	90°	105°	120°

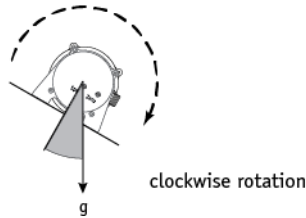

Important--
the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°

Full Counter-Clockwise Rotation:

CCW order code:	000	015	030	045	060	075	090	105	120
	0°	15°	30°	45°	60°	75°	90°	105°	120°

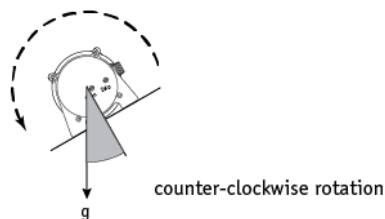

Important--
the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°

IT9420

Inclinometer • 4...20 mA

Enclosure Material:

A order code:	1	2
	powder-painted aluminum	303 stainless steel

Output Signal:

B order code:	1	2	5	6
output signal options:	4...20 mA	20...4 mA	4...20 mA	20...4 mA

input voltage:	8 – 34 vdc	14 – 32 vdc
----------------	------------	-------------

hazardous area certification:	not certified	CSA Standard 22.2 Class 1 Groups A, B, C and D	Cenelec LCIE EEx ia IIc T4
-------------------------------	---------------	--	----------------------------------

***IMPORTANT:** intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984

Electrical Connection:

C order code:	1	2	4																												
	6-pin plastic connector w/mating plug IP 67, NEMA 4X**,6	10-ft. [3 M] waterproof cable IP 67, NEMA 4X**, 6	25-ft. [7.5 M] instrumentation cable IP 67, NEMA 6																												
	1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded																												
C order code:	5	6	7																												
	100-ft. [30 M] waterproof cable IP 67, NEMA 4X**,6	10-ft. [3 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P	100-ft. [30 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P																												
	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW																												
	6-pin Mating Plug	Waterproof Cable	Instrumentation Cable																												
	<table border="1"> <tr> <th>pin</th> <th>signal</th> </tr> <tr> <td>A</td> <td>8...34 vdc</td> </tr> <tr> <td>B</td> <td>4...20 mA out</td> </tr> <tr> <td>C</td> <td>-</td> </tr> <tr> <td>D</td> <td>case ground</td> </tr> </table> <p style="text-align: center;"><i>contact view</i></p>	pin	signal	A	8...34 vdc	B	4...20 mA out	C	-	D	case ground	<table border="1"> <tr> <th>color code</th> <th>signal</th> </tr> <tr> <td>WHITE</td> <td>8...34 vdc</td> </tr> <tr> <td>BLACK</td> <td>4...20 mA out</td> </tr> <tr> <td>GREEN</td> <td>case ground</td> </tr> </table>	color code	signal	WHITE	8...34 vdc	BLACK	4...20 mA out	GREEN	case ground	<table border="1"> <tr> <th>color code</th> <th>2-wire</th> </tr> <tr> <td>RED</td> <td>8...34 vdc</td> </tr> <tr> <td>BLACK</td> <td>4...20 mA out</td> </tr> <tr> <td>WHITE</td> <td>n/a</td> </tr> <tr> <td>GREEN</td> <td>case ground</td> </tr> </table>	color code	2-wire	RED	8...34 vdc	BLACK	4...20 mA out	WHITE	n/a	GREEN	case ground
pin	signal																														
A	8...34 vdc																														
B	4...20 mA out																														
C	-																														
D	case ground																														
color code	signal																														
WHITE	8...34 vdc																														
BLACK	4...20 mA out																														
GREEN	case ground																														
color code	2-wire																														
RED	8...34 vdc																														
BLACK	4...20 mA out																														
WHITE	n/a																														
GREEN	case ground																														

*--Test pressure: 100 feet [30 meters] H₂O (40 PSID) Test Medium: Air; Duration: 2 hours. **--applies to stainless steel enclosure only.