


# XPT™ 600V IGBTs GenX3™

**IXXA50N60B3**  
**IXXP50N60B3**  
**IXXH50N60B3**


**$V_{CES} = 600V$**   
 **$I_{C110} = 50A$**   
 **$V_{CE(sat)} \leq 1.80V$**

Extreme Light Punch Through  
IGBT for 5-30 kHz Switching




| Symbol                        | Test Conditions   | Maximum Ratings                           |            |
|-------------------------------|---|---|------------|
|                               |   |   |            |
| $V_{CES}$                     | $T_J = 25^\circ C$ to $175^\circ C$   | 600                                       | V          |
| $V_{CGR}$                     | $T_J = 25^\circ C$ to $175^\circ C$ , $R_{GE} = 1M\Omega$                                   | 600                                       | V          |
| $V_{GES}$                     | Continuous  | $\pm 20$                                  | V          |
| $V_{GEM}$                     | Transient   | $\pm 30$                                  | V          |
| $I_{C25}$                     | $T_C = 25^\circ C$  | 120                                       | A          |
| $I_{C110}$                    | $T_C = 110^\circ C$   | 50  | A          |
| $I_{CM}$                      | $T_C = 25^\circ C$ , 1ms  | 200                                       | A          |
| $I_A$                         | $T_C = 25^\circ C$  | 25  | A          |
| $E_{AS}$                      | $T_C = 25^\circ C$  | 200                                       | mJ         |
| <b>SSOA</b><br><b>(RBSOA)</b> | $V_{GE} = 15V$ , $T_{VJ} = 150^\circ C$ , $R_G = 5\Omega$<br>Clamped Inductive Load         | $I_{CM} = 100$<br>@ $V_{CE} \leq V_{CES}$ | A          |
| $t_{sc}$<br><b>(SCSOA)</b>    | $V_{GE} = 15V$ , $V_{CE} = 360V$ , $T_J = 150^\circ C$<br>$R_G = 22\Omega$ , Non Repetitive | 10  | $\mu s$    |
| $P_C$                         | $T_C = 25^\circ C$  | 600                                       | W          |
| $T_J$                         |   | -55 ... +175                              | $^\circ C$ |
| $T_{JM}$                      |   | 175                                       | $^\circ C$ |
| $T_{stg}$                     |   | -55 ... +175                              | $^\circ C$ |
| $T_L$                         | Maximum Lead Temperature for Soldering  | 300                                       | $^\circ C$ |
| $T_{SOLD}$                    | 1.6 mm (0.062in.) from Case for 10s   | 260                                       | $^\circ C$ |
| $F_C$                         | Mounting Force (TO-263)   | 10..65 / 2.2..14.6                        | N/lb.      |
| $M_d$                         | Mounting Torque (TO-220 & TO-247)   | 1.13 / 10                                 | Nm/lb.in.  |
| <b>Weight</b>                 | TO-263  | 2.5                                       | g          |
|                               | TO-220  | 3.0                                       | g          |
|                               | TO-247  | 6.0                                       | g          |


TO-263 (IXXA)



TO-220 (IXXP)



TO-247 (IXXH)



G = Gate      C = Collector  
E = Emitter    Tab = Collector

## Features

- Optimized for 5-30kHz Switching
- Square RBSOA
- Avalanche Capability
- Short Circuit Capability
- International Standard Packages

## Advantages

- High Power Density
- 175 $^\circ C$  Rated
- Extremely Rugged
- Low Gate Drive Requirement
- Easy to Parallel

## Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

| Symbol        | Test Conditions<br>( $T_J = 25^\circ C$ , Unless Otherwise Specified) | Characteristic Values |              |                    |
|---------------|---|-----------------------|--------------|--------------------|
|               |   | Min.                  | Typ.         | Max.               |
| $BV_{CES}$    | $I_C = 250\mu A$ , $V_{GE} = 0V$                                      | 600                   |              | V                  |
| $V_{GE(th)}$  | $I_C = 250\mu A$ , $V_{CE} = V_{GE}$                                  | 3.5                   |              | V                  |
| $I_{CES}$     | $V_{CE} = V_{CES}$ , $V_{GE} = 0V$<br>$T_J = 150^\circ C$             |                       |              | 25 $\mu A$<br>2 mA |
| $I_{GES}$     | $V_{CE} = 0V$ , $V_{GE} = \pm 20V$                                    |                       |              | $\pm 100$ nA       |
| $V_{CE(sat)}$ | $I_C = 36A$ , $V_{GE} = 15V$ , Note 1<br>$T_J = 150^\circ C$          |                       | 1.55<br>1.80 | V<br>V             |

### Symbol Test Conditions

( $T_J = 25^\circ\text{C}$  Unless Otherwise Specified)


### Characteristic Values

|              |   | Min. | Typ. | Max. |                    |
|--------------|---|------|------|------|--------------------|
| $g_{fs}$     | $I_C = 36\text{A}, V_{CE} = 10\text{V}$ , Note 1  | 12   | 19   |      | S                  |
| $C_{ies}$    | $V_{CE} = 25\text{V}, V_{GE} = 0\text{V}, f = 1\text{MHz}$  |      | 2230 |      | pF                 |
| $C_{oes}$    |   |      | 195  |      | pF                 |
| $C_{res}$    |   |      | 44   |      | pF                 |
| $Q_{g(on)}$  | $I_C = 36\text{A}, V_{GE} = 15\text{V}, V_{CE} = 0.5 \cdot V_{CES}$   |      | 70   |      | nC                 |
| $Q_{ge}$     |   |      | 16   |      | nC                 |
| $Q_{gc}$     |   |      | 29   |      | nC                 |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 25^\circ\text{C}</math></b><br>$I_C = 36\text{A}, V_{GE} = 15\text{V}$<br>$V_{CE} = 360\text{V}, R_G = 5\Omega$<br>Note 2  |      | 27   |      | ns                 |
| $t_{ri}$     |   |      | 40   |      | ns                 |
| $E_{on}$     |   |      | 0.67 |      | mJ                 |
| $t_{d(off)}$ |   |      | 100  | 150  | ns                 |
| $t_{fi}$     |   |      | 135  |      | ns                 |
| $E_{off}$    |   | 0.74 | 1.20 | mJ   |                    |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 150^\circ\text{C}</math></b><br>$I_C = 36\text{A}, V_{GE} = 15\text{V}$<br>$V_{CE} = 360\text{V}, R_G = 5\Omega$<br>Note 2 |      | 30   |      | ns                 |
| $t_{ri}$     |   |      | 45   |      | ns                 |
| $E_{on}$     |   |      | 1.40 |      | mJ                 |
| $t_{d(off)}$ |   |      | 130  |      | ns                 |
| $t_{fi}$     |   |      | 190  |      | ns                 |
| $E_{off}$    |   | 1.20 |      | mJ   |                    |
| $R_{thJC}$   |   |      |      | 0.25 | $^\circ\text{C/W}$ |
| $R_{thCS}$   | TO-247  |      | 0.21 |      | $^\circ\text{C/W}$ |
|              | TO-220  |      | 0.50 |      | $^\circ\text{C/W}$ |

### Notes:


1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .
2. Switching times & energy losses may increase for higher  $V_{CE}$  (clamp),  $T_J$  or  $R_G$ .

### TO-220 Outline

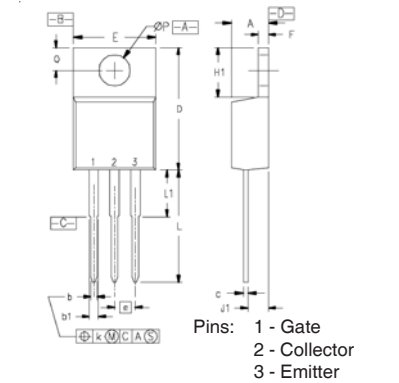


| SYM             | INCHES   |      | MILLIMETERS |       |
|-----------------|----------|------|-------------|-------|
|                 | MIN      | MAX  | MIN         | MAX   |
| A               | .170     | .190 | 4.32        | 4.83  |
| b               | .025     | .040 | 0.64        | 1.02  |
| b1              | .045     | .065 | 1.15        | 1.65  |
| c               | .014     | .022 | 0.35        | 0.56  |
| D               | .580     | .630 | 14.73       | 16.00 |
| E               | .390     | .420 | 9.91        | 10.66 |
| e               | .100 BSC |      | 2.54 BSC    |       |
| F               | .045     | .055 | 1.14        | 1.40  |
| H1              | .230     | .270 | 5.85        | 6.85  |
| J1              | .090     | .110 | 2.29        | 2.79  |
| k               | 0        | .015 | 0           | 0.38  |
| L               | .500     | .550 | 12.70       | 13.97 |
| L1              | .110     | .230 | 2.79        | 5.84  |
| $\varnothing P$ | .139     | .161 | 3.53        | 4.08  |
| Q               | .100     | .125 | 2.54        | 3.18  |

### TO-247 Outline

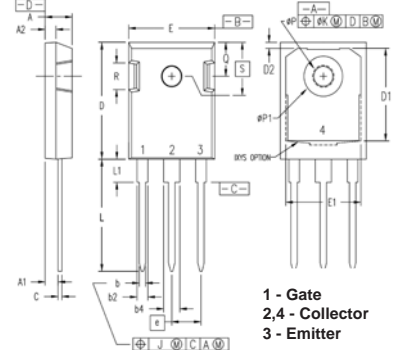

| Dim.             | Millimeter |       | Inches    |       |
|------------------|------------|-------|-----------|-------|
|                  | min        | max   | min       | max   |
| A                | 4.70       | 5.30  | 0.185     | 0.209 |
| A1               | 2.21       | 2.59  | 0.087     | 0.102 |
| A2               | 1.50       | 2.49  | 0.059     | 0.098 |
| b                | 0.99       | 1.40  | 0.039     | 0.055 |
| b2               | 1.65       | 2.39  | 0.065     | 0.094 |
| b4               | 2.59       | 3.43  | 0.102     | 0.135 |
| c                | 0.38       | 0.89  | 0.015     | 0.035 |
| D                | 20.79      | 21.45 | 0.819     | 0.845 |
| D1               | 13.07      | -     | 0.515     | -     |
| D2               | 0.51       | 1.35  | 0.020     | 0.053 |
| E                | 15.48      | 16.24 | 0.610     | 0.640 |
| E1               | 13.45      | -     | 0.53      | -     |
| E2               | 4.31       | 5.48  | 0.170     | 0.216 |
| e                | 5.45 BSC   |       | 0.215 BSC |       |
| L                | 19.80      | 20.30 | 0.078     | 0.800 |
| L1               | -          | 4.49  | -         | 0.177 |
| $\varnothing P$  | 3.55       | 3.65  | 0.140     | 0.144 |
| $\varnothing P1$ | -          | 7.39  | -         | 0.290 |
| Q                | 5.38       | 6.19  | 0.212     | 0.244 |
| S                | 6.14 BSC   |       | 0.242 BSC |       |

### TO-263 Outline

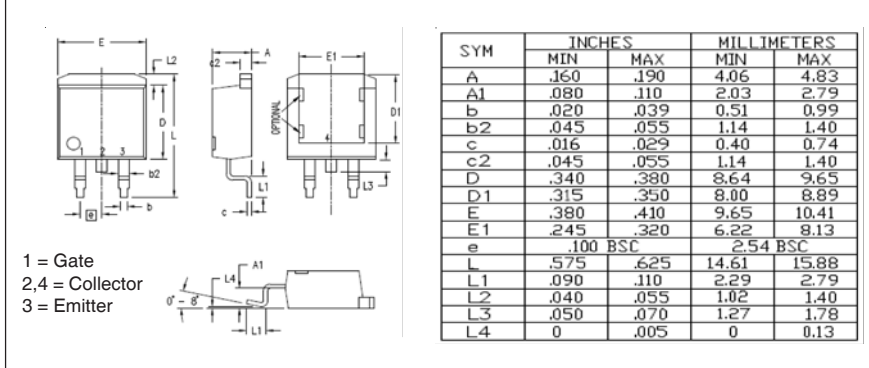

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .160     | .190 | 4.06        | 4.83  |
| A1  | .080     | .110 | 2.03        | 2.79  |
| b   | .020     | .039 | 0.51        | 0.99  |
| b2  | .045     | .055 | 1.14        | 1.40  |
| c   | .016     | .029 | 0.40        | 0.74  |
| c2  | .045     | .055 | 1.14        | 1.40  |
| D   | .340     | .380 | 8.64        | 9.65  |
| D1  | .315     | .350 | 8.00        | 8.89  |
| E   | .380     | .410 | 9.65        | 10.41 |
| E1  | .245     | .320 | 6.22        | 8.13  |
| e   | .100 BSC |      | 2.54 BSC    |       |
| L   | .575     | .625 | 14.61       | 15.88 |
| L1  | .090     | .110 | 2.29        | 2.79  |
| L2  | .040     | .055 | 1.02        | 1.40  |
| L3  | .050     | .070 | 1.27        | 1.78  |
| L4  | 0        | .005 | 0           | 0.13  |

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2  
by one or more of the following U.S. patents: 4,860,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2  
4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$

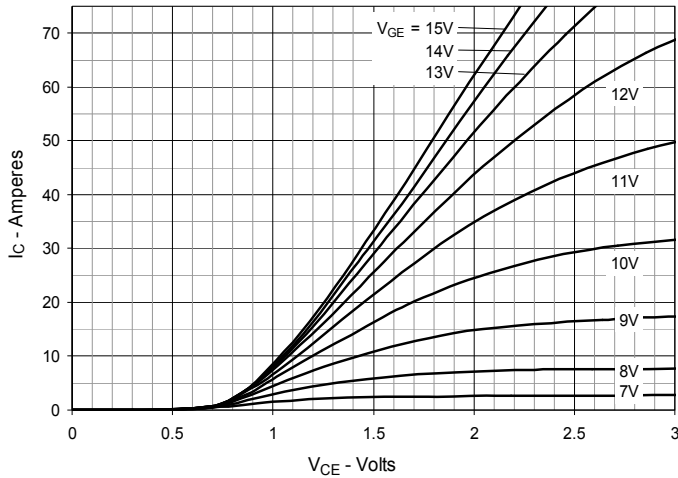


Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$

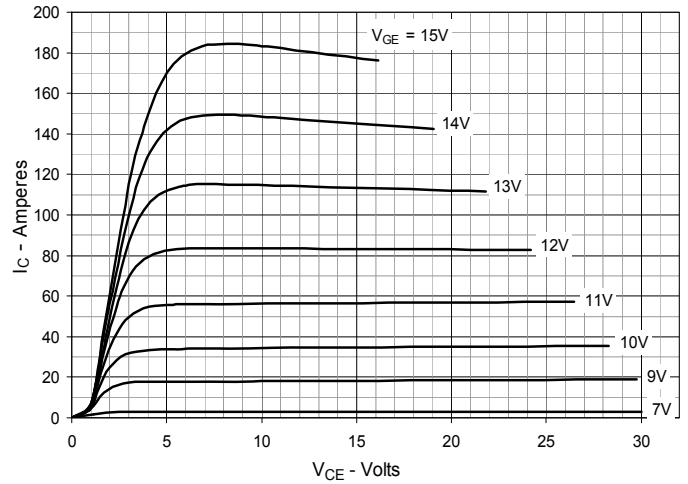


Fig. 3. Output Characteristics @  $T_J = 150^\circ\text{C}$

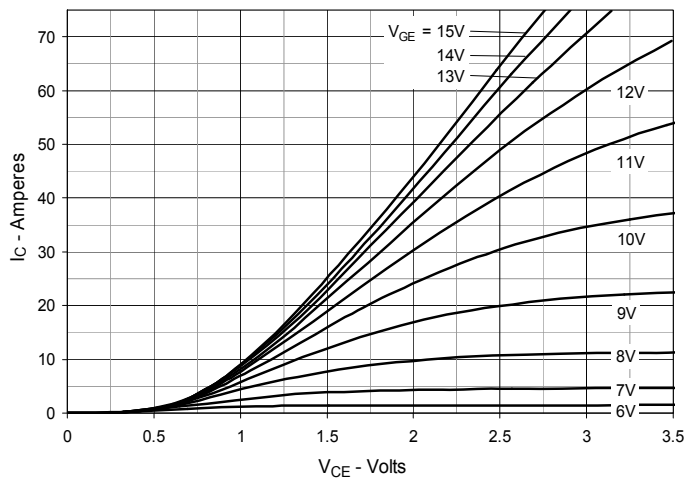


Fig. 4. Dependence of  $V_{CE(sat)}$  on Junction Temperature

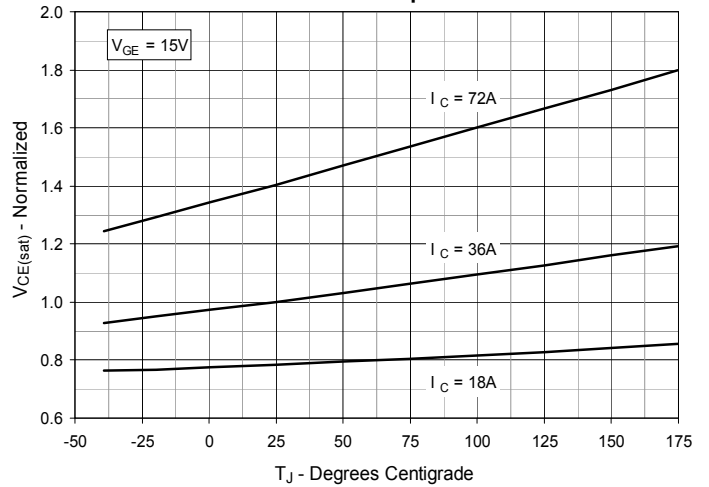


Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

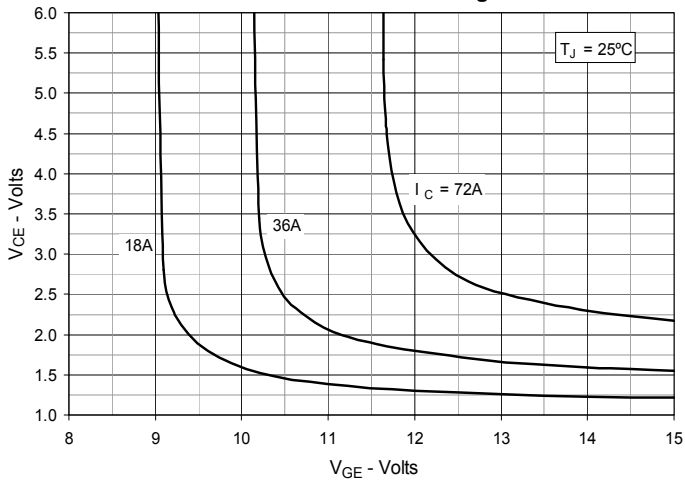


Fig. 6. Input Admittance

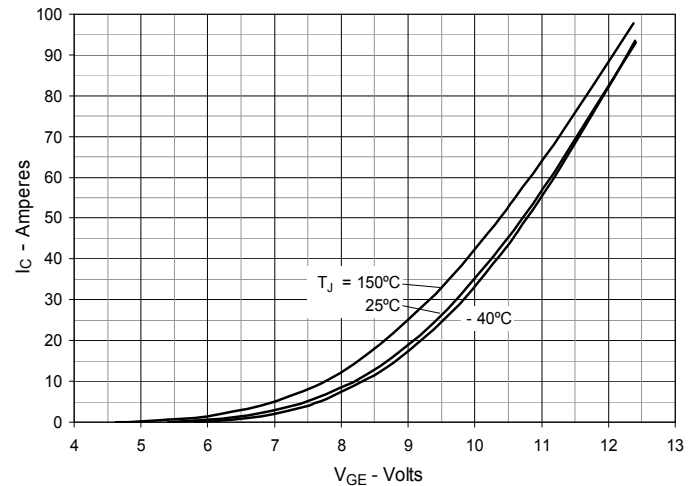


Fig. 7. Transconductance

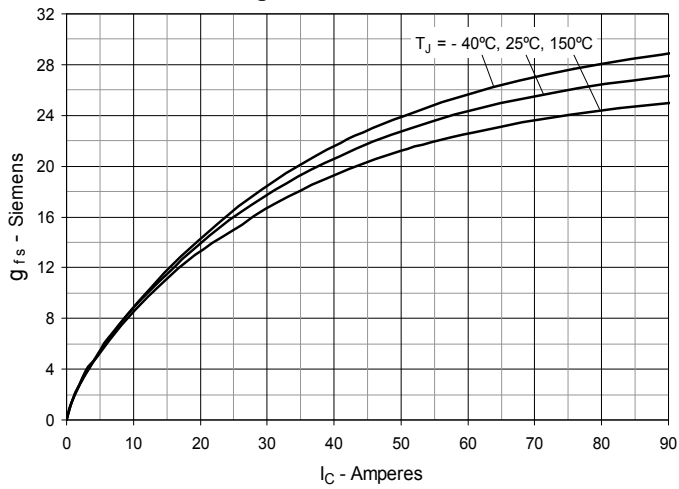


Fig. 8. Gate Charge

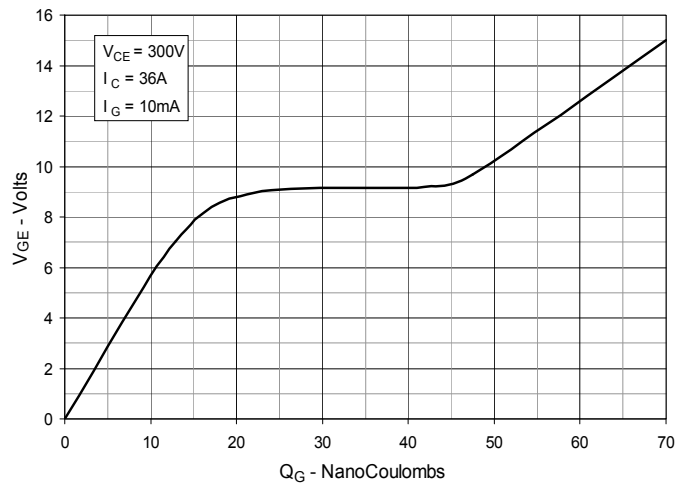


Fig. 9. Capacitance

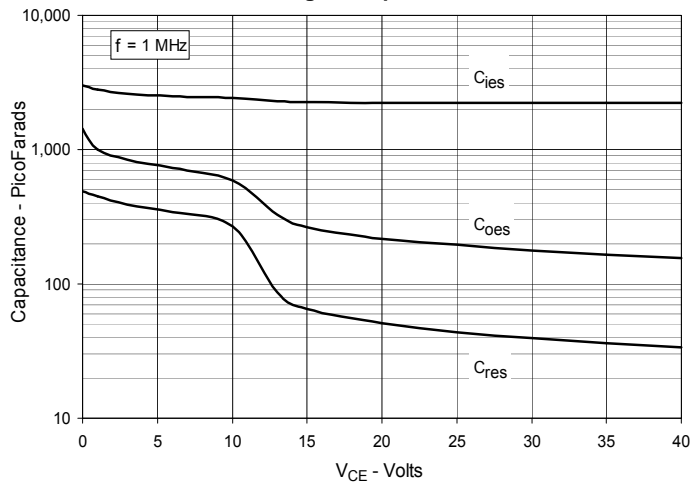


Fig. 10. Reverse-Bias Safe Operating Area

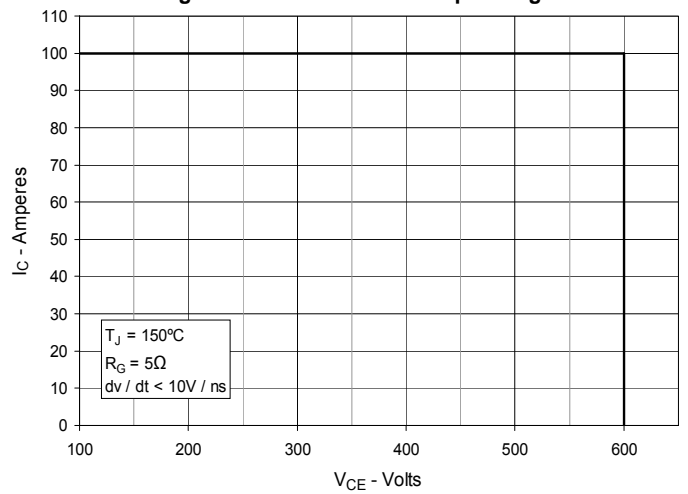


Fig. 11. Forward-Bias Safe Operating Area



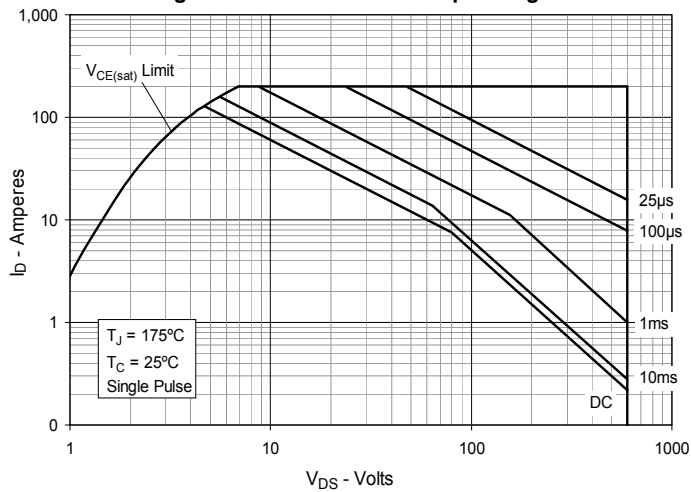



Fig. 12. Maximum Transient Thermal Impedance

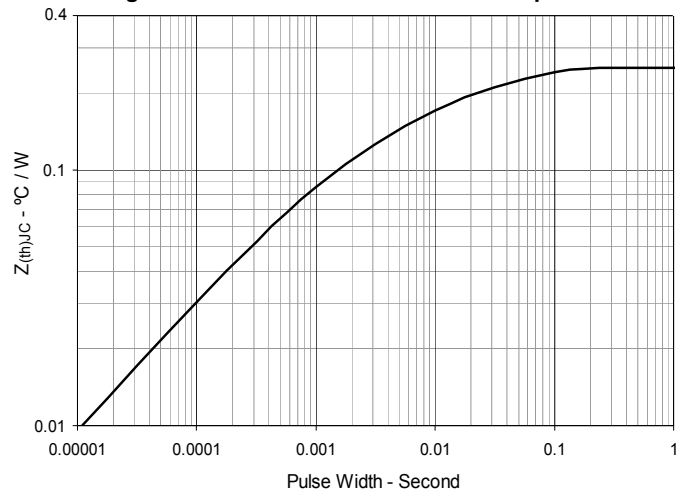


**Fig. 13. Inductive Switching Energy Loss vs. Gate Resistance**

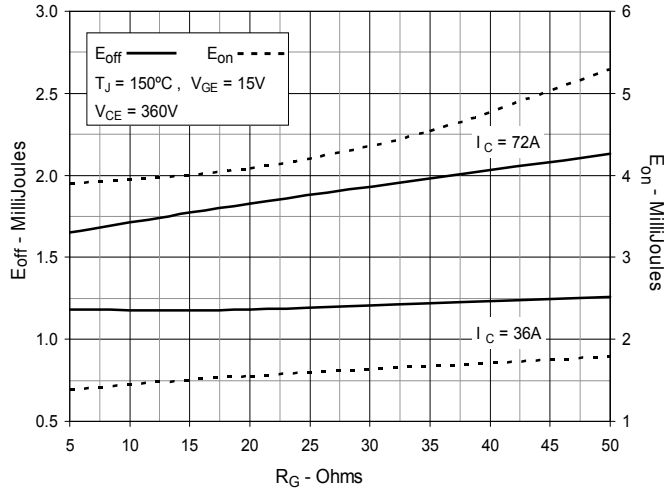


**Fig. 14. Inductive Switching Energy Loss vs. Collector Current**

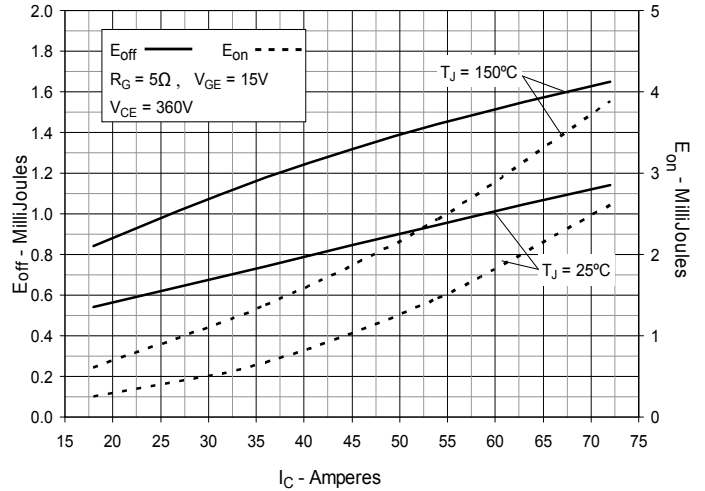


**Fig. 15. Inductive Switching Energy Loss vs. Junction Temperature**

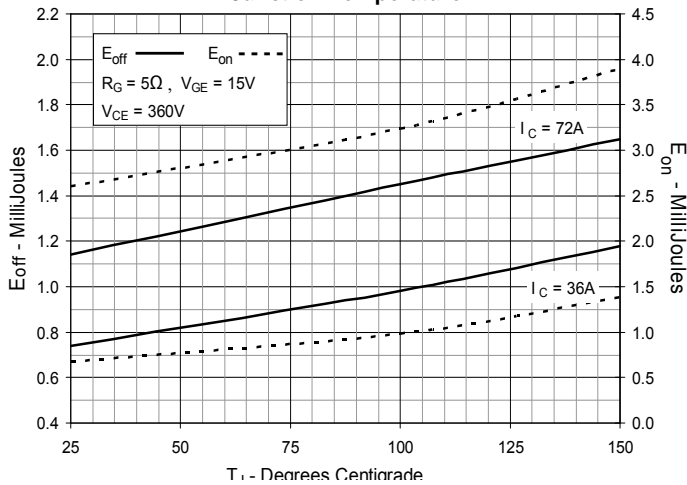

**Fig. 16. Inductive Turn-off Switching Times vs. Gate Resistance**

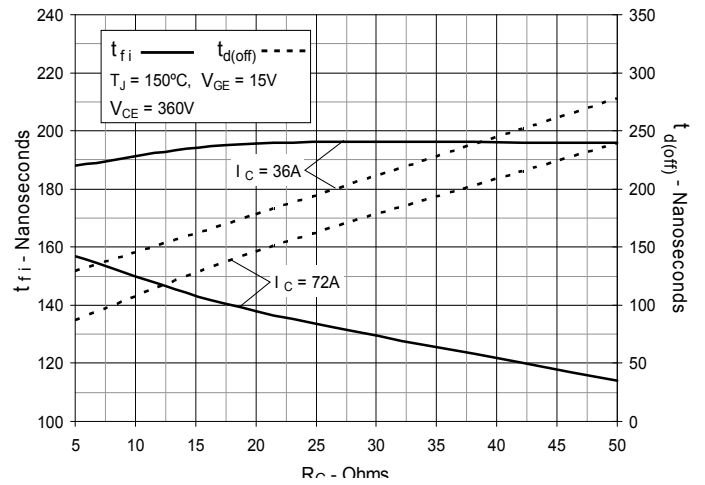

**Fig. 17. Inductive Turn-off Switching Times vs. Collector Current**

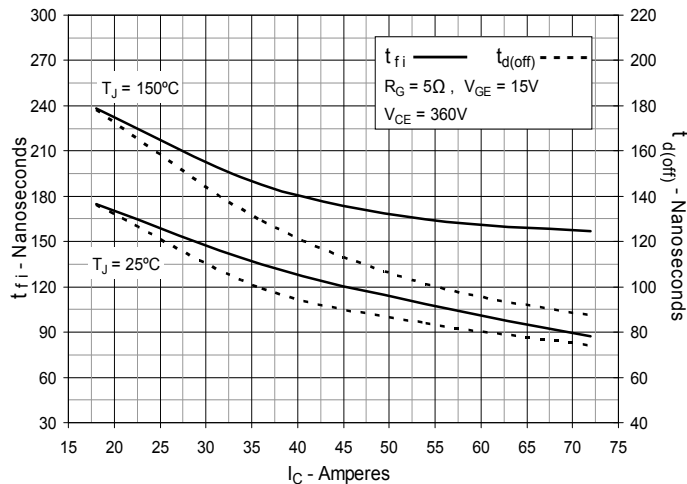

**Fig. 18. Inductive Turn-off Switching Times vs. Junction Temperature**

