
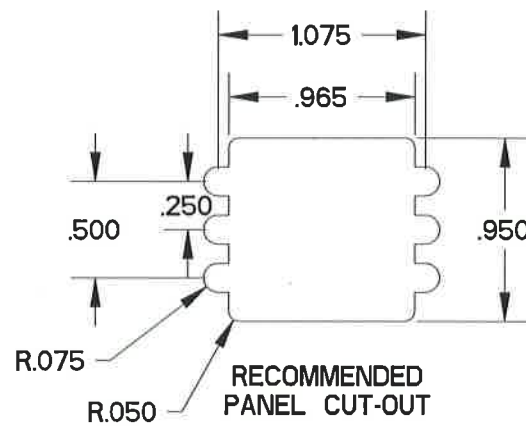
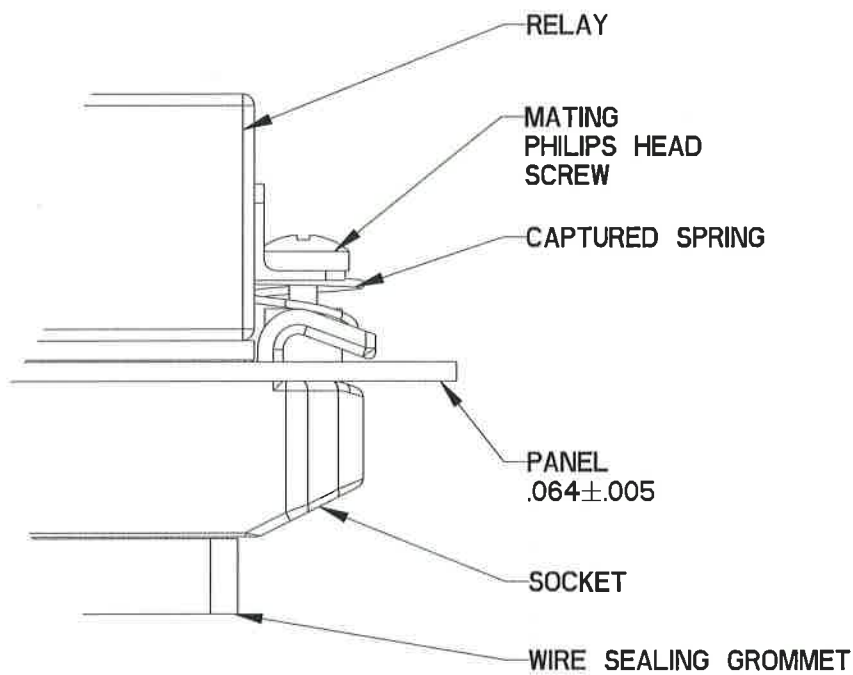
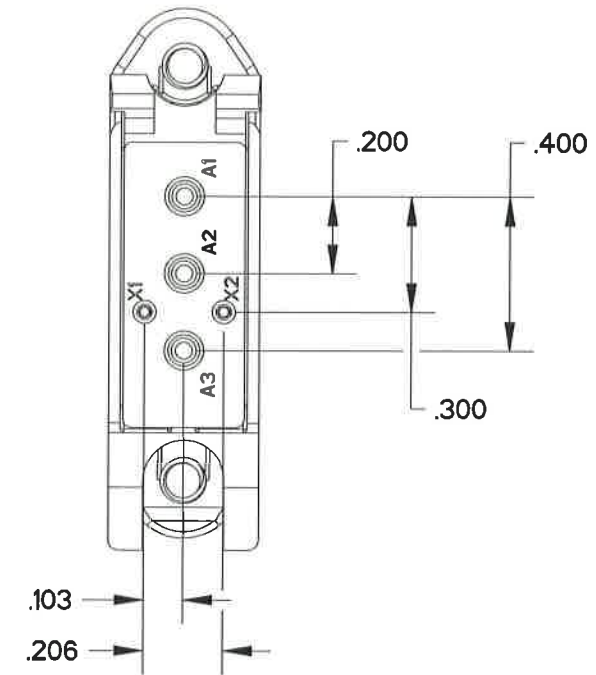
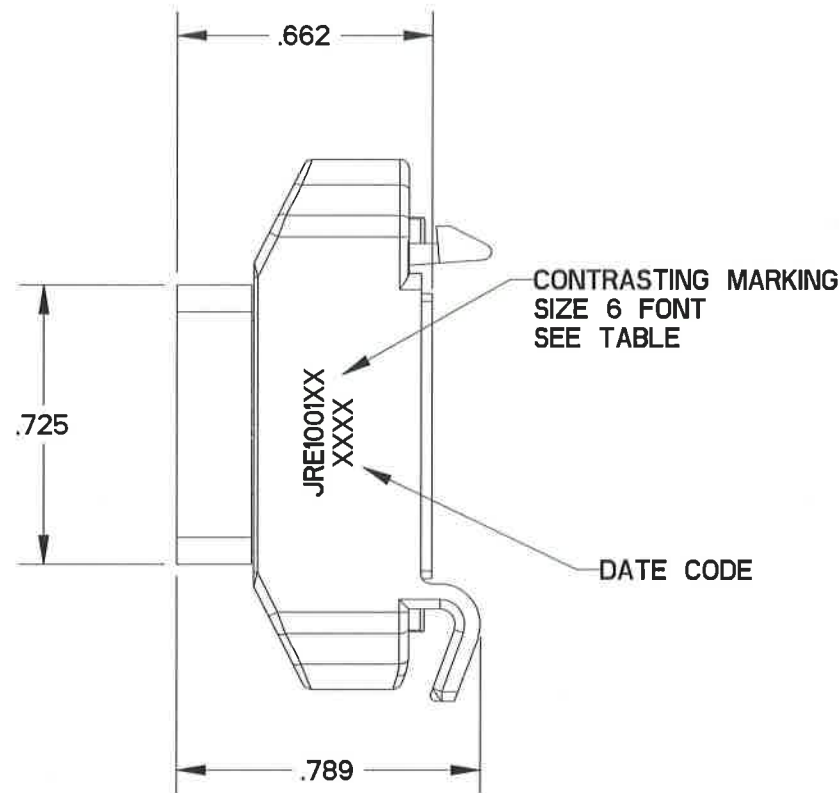


| REV | ECN | APP'D |
|-----|------|---------------|
| - | 7567 | <i>St/Slr</i> |

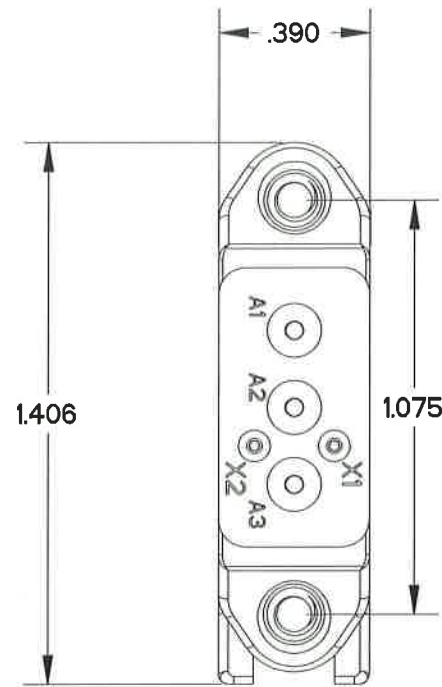

NOTES:

- MATERIALS:**
 HOUSING: POLYETHERIMIDE PER ASTM-D5205
 GROMMET: SILICONE RUBBER PER A-A-59588
 THREADED INSERT: STAINLESS STEEL
- OPERATING RANGE:**
 TEMPERATAURE: -65 °C TO 125 °C
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL AND 500 VRMS AT 80,000 FT. ALTITUDE
 VIBRATION: MIL-STD-202, METHOD 204, TEST CONDITION G
 SHOCK: MIL-STD-202, METHOD 213, TEST CONDITION C
- PART ACCEPTS M39029/101-554 AND M39029/92-552 SOCKET CONTACTS, SIZE 16/16 AND SIZE 22/22.**

| APCD P/N | HARDWARE PACKAGE | CONTACTS SUPPLIED |
|-----------|------------------|-------------------|
| JRE100100 | NONE | NONE |
| JRE100101 | NONE | YES |
| JRE100110 | YES | NONE |
| JRE100111 | YES | YES |

| | | | | | | | |
|---|---|-----------------------|--|-------------------------------|---|------------|--------------|
| DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE | TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±0.5° | PROJECTION | Amphenol Pcd SPECIFICATION DRAWING | | TITLE QUICK MOUNT RELAY SOCKET 1 POLE REF: M12883/56-01 | | |
| | | | ENGR W. HEDBERG 7/28/15 | SIZE B | DWG NO. JRE100100_C | REV - | |
| ORIGINAL | THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., BEVERLY, MA | | CHKD <i>William Lowe 8/4/15</i> | APPD <i>Stanley 8/5/15</i> | CODE: 58982 | SCALE: 2:1 | SHEET 1 OF 1 |

JRE100100_C

JRE100100_C