


- NOTES:
- MATERIALS:  
HOUSING: POLYETHERIMIDE PER ASTM-D5205  
GROMMET: SILICONE RUBBER PER A-A-59588  
THREADED INSERT: STAINLESS STEEL
  - OPERATING RANGE:  
TEMPERATURE: -65 °C TO 125 °C  
INSULATION RESISTANCE: 1000 MEGOHMS MIN.  
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL AND 500 VRMS AT 80,000 FT. ALTITUDE  
VIBRATION: MIL-STD-202, METHOD 204, TEST CONDITION G  
SHOCK: MIL-STD-202, METHOD 213, TEST CONDITION C
  - PART ACCEPTS M39029/92-533 AND M39029/92-534 SOCKET CONTACTS, SIZE 16/16 AND SIZE 16/20.






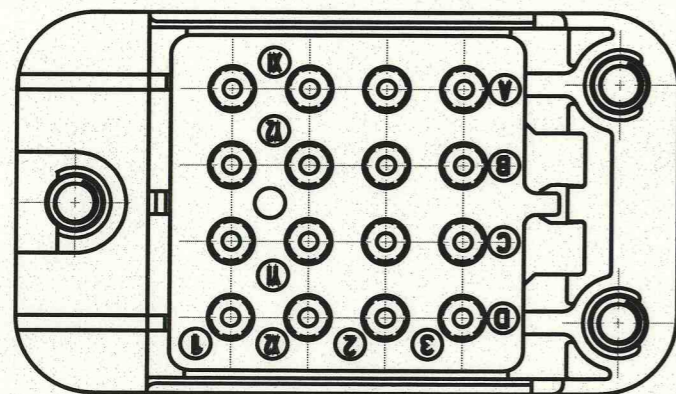


<b>DIMENSIONS</b> ANSI Y14.5M UNITS: INCHES Pro/E FILE	<b>TOLERANCES</b> .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	<b>PROJECTION</b> 	<b>Amphenol Pcd</b> SPECIFICATION DRAWING		<b>TITLE</b> SNAP-IN RELAY SOCKET 4 POLE		
			ENGR Frank.Li 07-Apr-08		SIZE B	DWG NO. JRS400100	REV -
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., BEVERLY, MA		CHKD  5/29/09 APPD  5-29-09		CODE: 58982	SCALE: 2:1	SHEET 1 OF 3

JRS400100

JRS400100






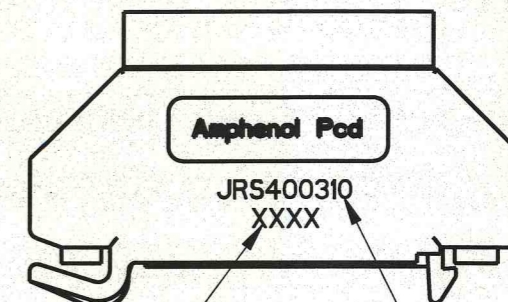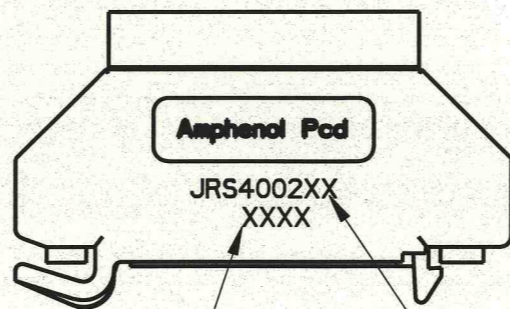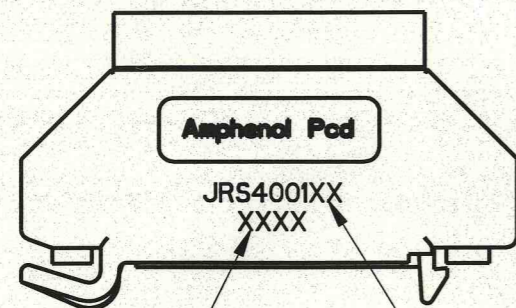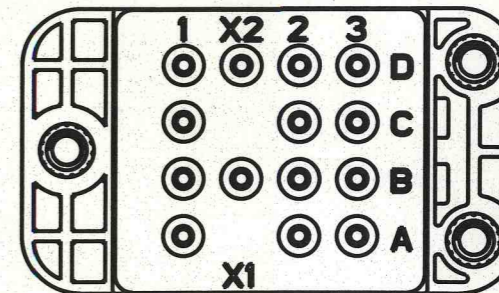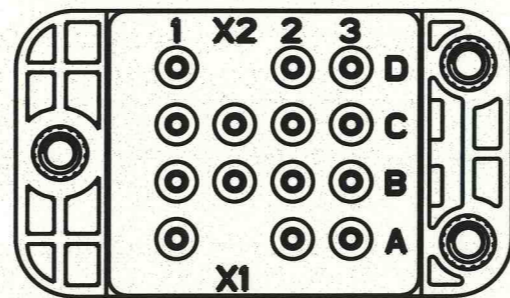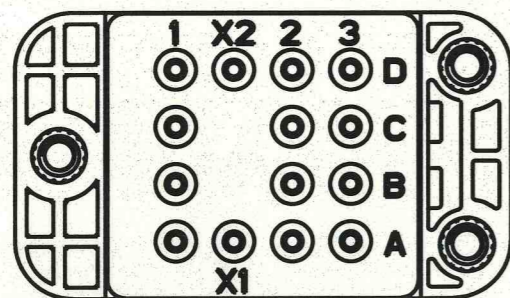

DATE CODE → WHITE MARKING  
FONT SIZE 6  
SEE TABLE BELOW

DATE CODE → WHITE MARKING  
FONT SIZE 6  
SEE TABLE BELOW

DATE CODE → WHITE MARKING  
FONT SIZE 6  
SEE TABLE BELOW

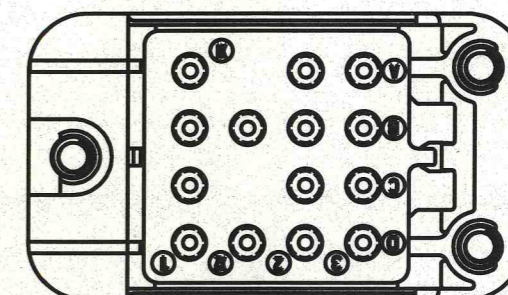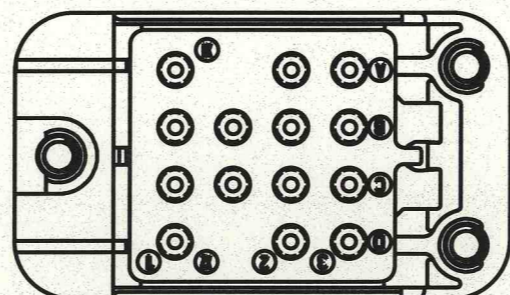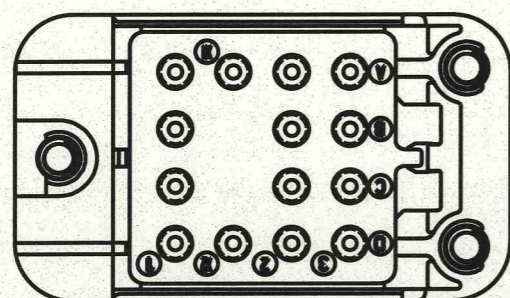

JRS4001XX

JRS4002XX

JRS4003XX

PART NUMBER TABLE

APCD P/N	HARDWARE PACKAGE	CONTACTS SUPPLIED
JRS400100	NONE	NONE
JRS400101	NONE	YES
JRS400110	YES	NONE
JRS400111	YES	YES

PART NUMBER TABLE

APCD P/N	HARDWARE PACKAGE	CONTACTS SUPPLIED
JRS400200	NONE	NONE
JRS400201	NONE	YES
JRS400210	YES	NONE
JRS400211	YES	YES

PART NUMBER TABLE

APCD P/N	HARDWARE PACKAGE	CONTACTS SUPPLIED
JRS400300	NONE	NONE
JRS400301	NONE	YES
JRS400310	YES	NONE
JRS400311	YES	YES

SIZE <b>B</b>	DWG NO. <b>JRS400100</b>	REV -
CODE: 58982	SCALE: 2:1	SHEET 2 OF 3

JRS400100

JRS400100